

Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com www.AHSystems.com

SAS-510-2 Log Periodic Antenna 290 MHz – 2 GHz

This directional Log Periodic Antenna is an ideal solution for radiated emissions and normalized site attenuation.





Frequency Range: 290 MHz - 2000 MHz Antenna Factor: 14 - 32 dB Gain: 6.5 dBi Maximum Continuous Power: 1000 Watts Maximum Radiated Field: 200 V/m Pattern Type: directional 3dB Beamwidth (E-Field): 45° 3dB Beamwidth (H-Field): 100° Impedance: 50 Ω VSWR: 1.45:1 typ. (2.2:1 max) Connector: N-Type, Female Mounting Base: $\frac{1}{4} \times 20$ Thread, Female


Features

- Frequency Range of 290 MHz to 2000 MHz
- Receive and Transmit
- Individually Calibrated (1, 3 and 10 Meter calibration included, horizontal polarization)
- Rugged Construction
- Three Year Warranty

This Log Periodic Antenna is the standard workhorse of any EMC compliance test house. The SAS-510-2 has an excellent cross-polarization property that is required per CISPR 16-1 and greatly reduces measurement uncertainty. This Log Periodic Antenna is an ideal solution for radiated emissions and normalized site attenuation. Constructed of lightweight aluminum, this directional Log Periodic Antenna has been manufactured to ensure maximum gain, low VSWR and high power handling capabilities.

Recommended Accessories

- ATU-510 (Antenna Tripod, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- PAM-0202 (30 dB Preamplifier)

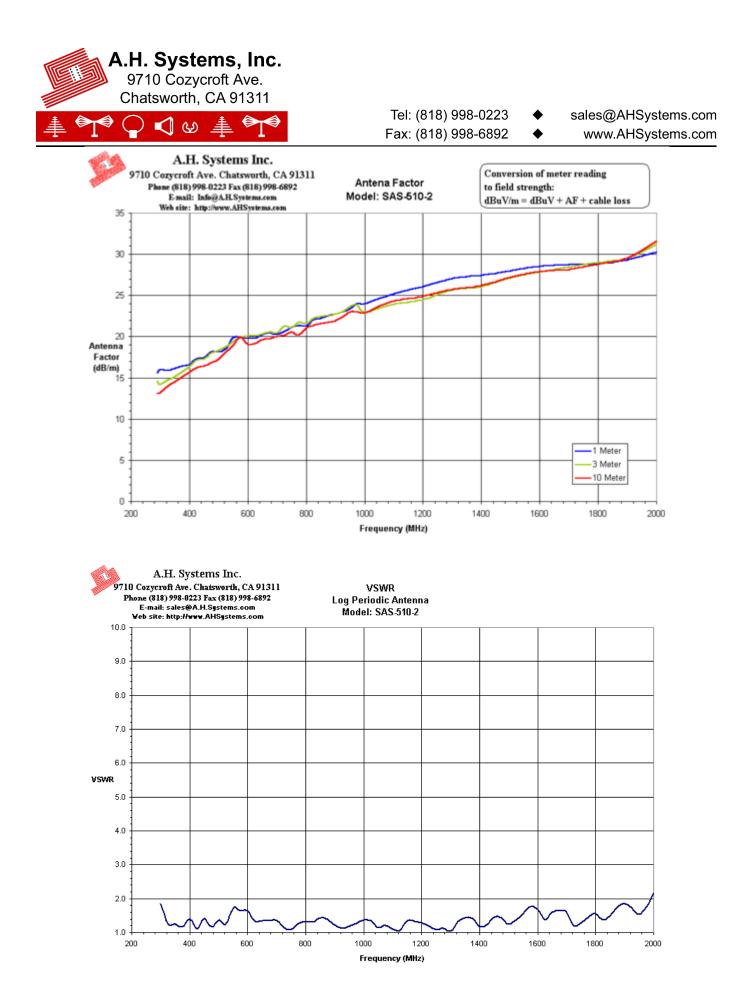




Tel: (818) 998-0223

٠

Fax: (818) 998-6892

sales@AHSystems.com www.AHSystems.com

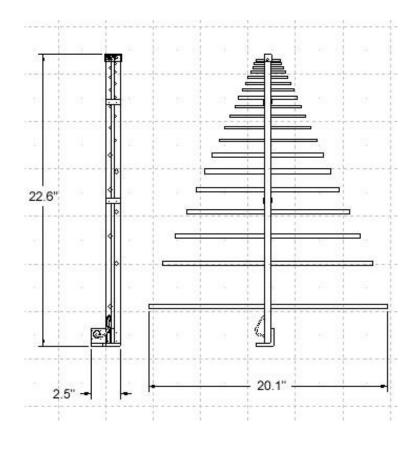

Physical Dimensions

Length:	22.6 in. (57.5 cm)
Width:	20.1 in. <i>(51.1 cm)</i>
Weight:	1.4 lb.'s <i>(0.64 kg)</i>