

# VSS 500N10

## VOLTAGE SURGE SIMULATOR



### FOR TESTS ACCORDING TO ...

- › EN 60065
- › EN 60950-1
- › IEC 60065
- › IEC 60950-1
- › UL 6500

### VOLTAGE SURGE SIMULATION

As per safety test requirements the insulation between accessible parts or parts connected to them and hazardous live parts shall be able to withstand surges due to transients, caused e.g. by lightning events and entering the apparatus through the antenna terminal. The voltage surge simulator VSS 500N10 generates high voltage transients as required by EN/IEC 60065 and UL 6500 standards for safety tests on audio, video and similar electronic apparatus.

Such test is also required by EN/IEC 60950-1 for safety testing of Information Technology equipment.

### HIGHLIGHTS

- › Surge voltage up to 10kV
- › Generator designed to comply with IEC 60065
- › Generator designed to comply with UL 6500
- › Interlock
- › Warning lamp control
- › Manual operation
- › USB (optical link) and GPIB interface

### APPLICATION AREAS

-  COMPONENTS
-  INDUSTRY
-  RESIDENTIAL
-  BROADCAST
-  TELECOM

## TECHNICAL DETAILS

### VOLTAGE SURGE SIMULATOR, PULSE AS PER IEC 60065

Voltage (o.c.)	500V - 10,000V ± 10%
Surge capacitor	1nF
Series resistor	1,000ohm
Parallel resistor	>15Mohm
Polarity	Positive
Event counter	1 - 30,000 or endless

### TRIGGER

Automatic	Automatic pulse release
Manual	Single pulse release
External	External pulse release
CRO trigger	5V trigger signal for oscilloscope
Pulse repetition rate	max. 1Hz (1s - 999s)

### OUTPUT

Direct	Via HV connector; Zi = 1,000ohm
--------	---------------------------------

### TEST ROUTINES

Quick Start	Parameters online adjustable; easy-to-use and fast
User Test routines	Change Polarity after n pulses Change voltage after n pulses
Service	Service, set-up, self test

### INTERFACE

Optical interface	Opto link, 3 m cable USB A connector
Parallel interface	IEEE 488, addresses 1 - 30


### SAFETY

Safety circuit	Control input (24Vdc)
Warning lamp	Floating output contact

### GENERAL DATA

Dimensions, weight	19"/3HU, approx. 12kg
Supply voltage	115/230V +10/-15%
Fuses	2 x 2AT (230V) or 2 x 4AT (115V)

# COMPETENCE WHEREVER YOU ARE

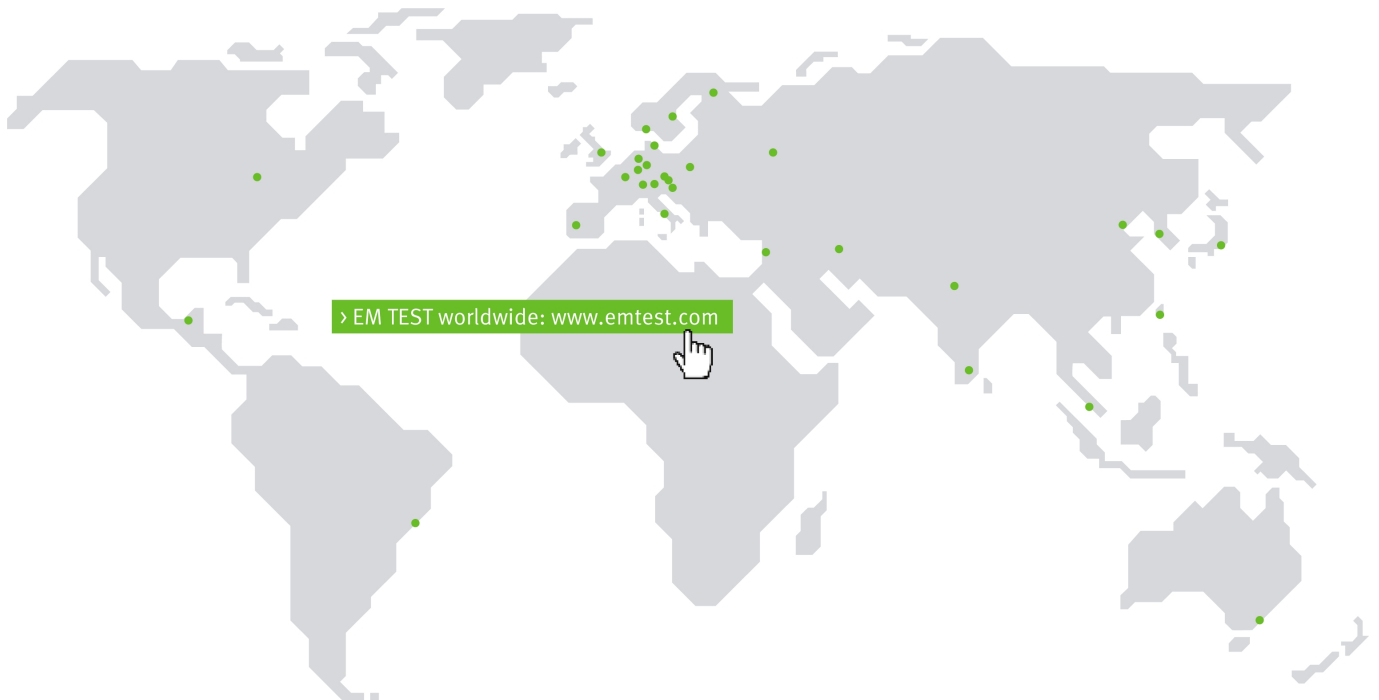

## CONTACT EM TEST DIRECTLY

### Switzerland

EM TEST (Switzerland) GmbH > Sternenhofstraße 15 > 4153 Reinach > Switzerland  
 Phone +41 (0)61/7179191 > Fax +41 (0)61/7179199  
 Internet: www.emtest.ch > E-mail: sales.emtest@ametek.com

### Germany

AMETEK CTS Germany GmbH > Lünener Straße 211 > 59174 Kamen > Deutschland  
 Phone +49 (0)2307/26070-0 > Fax +49 (0)2307/17050  
 Internet: www.emtest.com > E-mail: info.cts@ametek.de

### France

EM TEST FRANCE > Le Trident - Parc des Collines > Immeuble B1 - Etage 3 > 36, rue Paul Cézanne > 68200 Mulhouse > France  
 Phone +33 (0)389 31 23 50 > Fax +33 (0)389 31 23 55  
 Internet: www.emtest.fr > E-mail: info@emtest.fr

### Poland

EM TEST Polska > ul. Ogrodowa 31/35, 00-893 Warszawa > Polska  
 Phone +48 (0)518 64 35 12  
 Internet: www.emtest.com/pl > E-mail: infopolska.emtest@ametek.com

### USA / Canada

AMETEK Compliance Test Solutions > 52 Mayfield Ave. > Edison > NJ 08837  
 Phone +1 (732) 417-0501  
 Internet: www.emtest.com > E-mail: sales.emtest@ametek.com

### P.R. China

E & S Test Technology Limited > Rm 913, Leftbank > No. 68 Bei Si Huan Xi Lu > Haidian District > Beijing 100080 > P.R. China  
 Phone +86 (0)10 82 67 60 27 > Fax +86 (0)10 82 67 62 38  
 Internet: www.emtest.com > E-mail: info@emtest.com.cn

### Republic of Korea

EM TEST Korea Limited > #405 > WooYeon Plaza > #986-8 > YoungDeok-dong > Giheung-gu > Yongin-si > Gyeonggi-do > Korea  
 Phone +82 (31) 216 8616 > Fax +82 (31) 216 8616  
 Internet: www.emtest.co.kr > E-mail: sales@emtest.co.kr

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release. Subject to change without further notice.