



## A.H. Systems, Inc.

9710 Cozycroft Ave.  
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892



www.AHSystems.com

## FCC-2

### Tuned Dipole Antenna 65 MHz – 180 MHz

Designed per the FCC specifications, this Tuned Dipole antenna is ideal for site attenuation measurements.



Frequency Range: 65 MHz - 180 MHz

Balun Loss: <0.5 dB

Maximum Continuous Power: 200 Watts

Impedance: 50  $\Omega$

Connector: N-Type, Female

### Features

- F.C.C. Antenna Balun Design
- Omni-directional, Receive and Transmit
- Individually Calibrated (1, 3 and 10 Meter calibration included, horizontal polarization)
- Rugged Construction with low balun loss, low VSWR
- Three Year Warranty

The A.H. Systems FCC-2 Tuned Dipole Antenna is manufactured per ANSI C63.5 (Willmar Roberts design) and covers the 65 MHz – 180 MHz Frequency Range. This half wave dipole antenna provides an accurate standard for precise EMI testing and site attenuation measurements (per EN55022 and ANSI C63.4), and should be considered as a standard reference antenna for frequencies below 1000 MHz.

### Recommended Accessories

- ATU-510 (Antenna Tripod, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- PAM-0202 (30 dB Preamplifier)



**A.H. Systems, Inc.**

9710 Cozycroft Ave.  
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892




www.AHSystems.com



**A.H. Systems Inc.**

9710 Cozycroft Ave. Chatsworth, CA 91311  
Phone (818) 998-0223 Fax (818) 998-6892  
E-mail: [Info@AHSystems.com](mailto:Info@AHSystems.com)  
Web site: <http://www.AHSystems.com>

Balun Loss  
Model: FCC-2  
Tuned Dipole Antenna

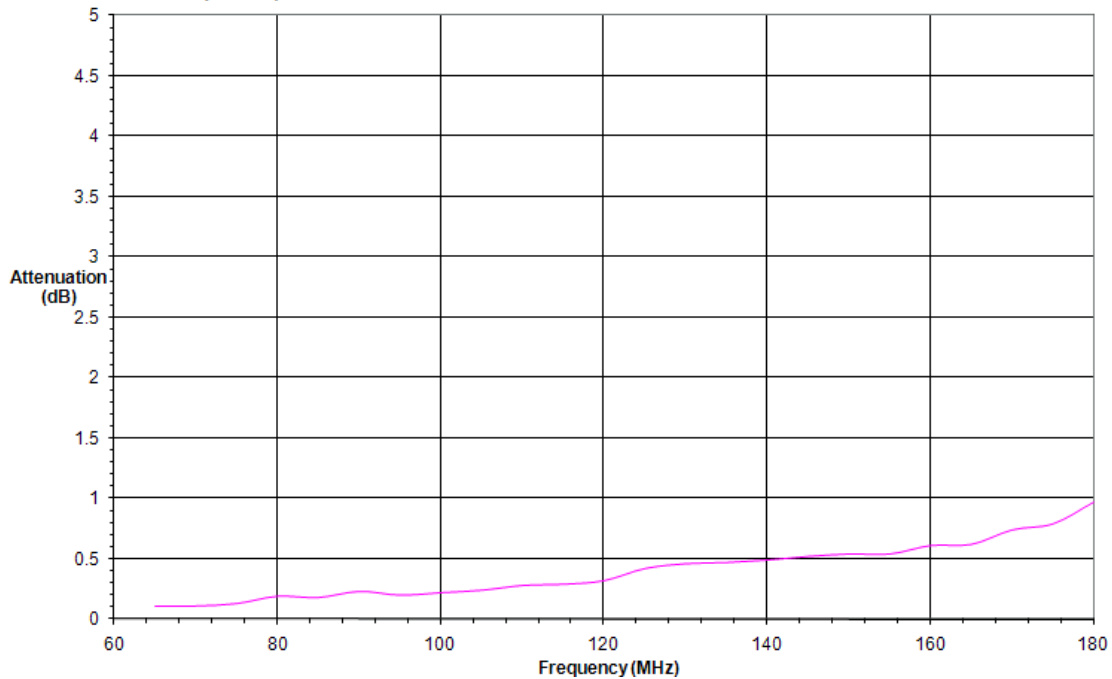

VSWR  
Tuned Dipole Antenna  
Model FCC-2

