

PDH/SDH ANALYZER

MP1550A/B

PDH: 2/8/34/139 Mb/s, SDH: 156/622 Mb/s


With compliments

Helmut Singer Elektronik

www.helmut-singer.de info@helmut-singer.de

fon +49 241 155 315 fax +49 241 152 066

Feldchen 16-24 D-52070 Aachen Germany

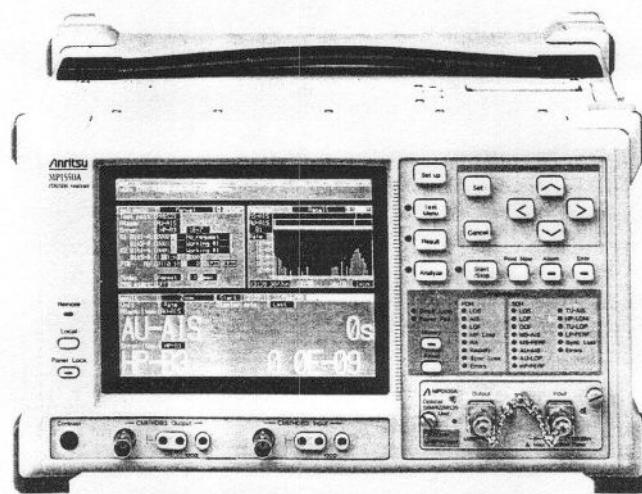

Custom-made product

GPIB
OPTION

The MP1550A/B is a small PDH/SDH analyzer. Despite its size, it has all the measurement functions necessary for evaluating PDH/SDH systems, like bit errors, alarms, pointers, performance, jitter, and wander. It can be carried easily by hand and is ideal for pre-shipment inspection on production lines, connecting tests at construction sites, acceptance tests, periodic maintenance, and other tasks.

Features

- All PDH/SDH system tests
- Large, easy-to-read color LCD (MP1550A)
- Built-in printer and floppy disk drive (standard)
- In-service and out-of-service measurement
- Simultaneous error and alarm measurements at multi layer
- Trouble-search functions

Specifications

• MP1550A/B PDH/SDH Analyzer

PDH	Bit rate	2.048, 8.448, 34.368, 139.264 Mb/s
	Level/waveform	Conforms to ITU-T G.703 (with 20 dB monitoring points)
	Connector	BNC, 75 Ω unbalanced, 3-pin Siemens 120 Ω balanced 2.048 Mb/s: HDB3 balanced/unbalanced 8.448, 34.368 Mb/s: HDB3 unbalanced 139.264 Mb/s: CMI unbalanced
	Clock	Internal (accuracy: ±7 ppm), external (ECL [AC] 50 Ω), receive
	Auxiliary interface	Clock sync output, frame sync output
	Frame format	Unframed: 2, 8, 34, 139 Mb/s Framed: 2 Mb/s (30, 31 ch with or without CRC4) [G.704], 8 Mb/s [G.742], 34 Mb/s [G.751], 139 Mb/s [G.751], MUX/DEMUX function (option)
	Test pattern	PRBS: 2 ¹¹ -1, 2 ¹⁵ -1, 2 ²⁰ -1, 2 ²³ -1 (O.151) Word: 16 bit program, all 0, all 1
	Error addition	Bit all, bit info, code, Ebit, FAS Timing: Single, 10 ⁻³ , 10 ⁻⁴ , 10 ⁻⁵ , 10 ⁻⁶ , 10 ⁻⁷ , 10 ⁻⁸ , 10 ⁻⁹ , all FAS: n in 16 (n: 1 to 4), all
	Alarm addition	LOS, AIS, RA, RA (MF), Timing: all
	Measurement	Mode: Single, repeat, manual In-service Error: Frame, code, CRC-4, Ebit Alarm: Power fail, LOS, AIS, LOF, MF loss, RA, RA (MF) Performance: G.821 (including ANNEX. D), M.2100, G.826 Out-of-service Error: Frame, code, CRC-4, Ebit, bit Alarm: Power fail, LOS, AIS, LOF, MF loss, RA, RA (MF), sync loss Performance: G.821 (including ANNEX. D), M.2100, G.826
	LED	LOS, AIS, LOF, MF loss, RA, RA (MF), sync loss, errors
	Monitor	Frame word (FAS)

Continued on next page

DIGITAL TRANSMISSION MEASURING INSTRUMENTS

Anritsu

SDH	Bit rate	155.520, 622.080 Mb/s
	Clock	Internal (accuracy: ± 3.5 ppm), lock (2 M), external (ECL [AC] 50 Ω), receive
	Auxiliary interface	Clock sync output, frame sync output, DCC interface (V.11)
	Multiplexing structure	See Fig. 1
	Through	Loop-through with bit-error insertion
	Test pattern	PRBS: 2 ¹¹ -1, 2 ¹⁵ -1, 2 ²⁰ -1, 2 ²³ -1 (O.151) Word: 16 bit program, all 0, all 1
	Error addition	Bit all, bit info, B1, B2, B3, BIP-2, MS-FEBE, HP-FEBE, LP-FEBE Timing: Single, 10 ⁻³ , 10 ⁻⁴ , 10 ⁻⁵ , 10 ⁻⁶ , 10 ⁻⁷ , 10 ⁻⁸ , 10 ⁻⁹ , all
	Alarm addition	LOS, LOF, MS-AIS, MS-FERF, AU-AIS, AU-LOP, HP-FERF, TU-AIS, TU-LOP, HP-LOM, LP-FERF Timing: All
	OH preset data	SOH, VC3/VC4 POH, VC1 POH, K1/K2, pointer, path trace
	Measurement	Mode: Single, repeat, manual In-service Error: B1, B2, B3, BIP-2, MS-FEBE, HP-FEBE, LP-FEBE Alarm: Power fail, LOS, LOF, OOF, MS-AIS, MS-FERF, AU-AIS, AU-LOP, HP-FERF, TU-AIS, HP-LOM, TU-LOP, LP-FERF Performance: G.826 Out-of-service Error: B1, B2, B3, BIP-2, MS-FEBE, HP-FEBE, LP-FEBE, bit Alarm: Power fail, LOS, LOF, OOF, MS-AIS, MS-FERF, AU-AIS, AU-LOP, HP-FERF, TU-AIS, HP-LOM, TU-LOP, LP-FERF, sync loss Performance: G.826
PDH, SDH	LED	LOS, LOF, OOF, MS-AIS, MS-FERF, AU-AIS, AU-LOP, HP-FERF, TU-AIS, HP-LOM, LP-FERF, sync loss, errors
	Justification	AU-PTR, TU-PTR, C, C1/C2 Measurement: NDF, +PJC, -PJC, 3 times consecutively
	Monitor	SOH, VC3/VC4 POH, VC1 POH, K1/K2, pointer, path trace
	Pointer sequence	Single or opposite polarity, double or opposite polarity, regular with double, regular with missing (G.783)
	Trouble search	Search the all channels errors/alarms automatically, and results are displayed every channel
	Delay measurement	0 to 10.00 s
	Graphics	Error/alarm, Bar resolution: 1, 15, 60 min
	Printer	Internal (built-in)/external
	Internal memory	10 setup memories: 15 graphic memories
	Others	FDD (standard), RS-232C (Option 03), GPIB (Option 04), buzzer, real time clock
	General	Dimensions: 320 (W) x 177 (H) x 215 (D) mm Mass: approx. 8.5 kg (without options) Power supply: 85 to 132 Vac or 170 to 250 Vac, 47.5 to 63 Hz, ≤ 300 VA Temperature: 0° to 50° (operating, except FDD operating), -20° to 60°C (storage) EMC ¹ : EN55011 (1991, Group 1, Class A), EN50082-1 (1992) Safety: EN61010-1: 1993 (Installation Category II, Pollution Degree II)

*1: Electromagnetic compatibility

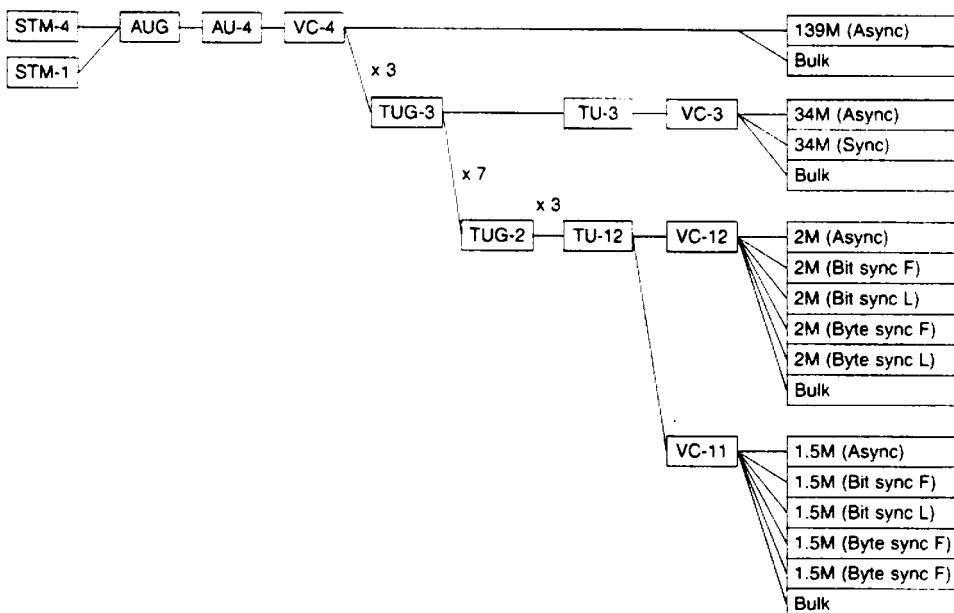


Fig. 1 Multiplexing structure

• Jitter (Tx)/frequency offset (Option 06)

Bit rate	2.048, 8.448, 34.368, 139.264, 155.520, 622.080 Mb/s																																																	
Jitter generation	<p>Conforms to ITU-T O.171 Frequency: 2 Hz to 6 MHz Amplitude: 0 to 20.00 Ulpp Resolution: 0.001 Ulpp (2 UI range), 0.01 Ulpp (20 UI range)</p> <table border="1"> <thead> <tr> <th>Bit rate (Mb/s)</th> <th>A1 (Ulpp)</th> <th>F1 (Hz)</th> <th>F2*(kHz)</th> <th>F3*(kHz)</th> <th>F4*(kHz)</th> <th>F5*(MHz)</th> </tr> </thead> <tbody> <tr> <td>2.048</td> <td>0.5</td> <td>2</td> <td>1</td> <td>20</td> <td>27.5</td> <td>0.11</td> </tr> <tr> <td>8.448</td> <td>0.5</td> <td>2</td> <td>2</td> <td>20</td> <td>105</td> <td>0.42</td> </tr> <tr> <td>34.368</td> <td>0.5</td> <td>2</td> <td>5</td> <td>100</td> <td>250</td> <td>1</td> </tr> <tr> <td>139.264</td> <td>0.5</td> <td>2</td> <td>5</td> <td>100</td> <td>1000</td> <td>4</td> </tr> <tr> <td>155.520</td> <td>0.5</td> <td>2</td> <td>6.5</td> <td>500</td> <td>150</td> <td>1.5</td> </tr> <tr> <td>622.080</td> <td>0.5</td> <td>2</td> <td>25</td> <td>500</td> <td>600</td> <td>6</td> </tr> </tbody> </table> <p>Accuracy: $\pm 5\% \pm 0.05$ Ulpp at 1 kHz (2 UI range), $\pm 5\% \pm 0.3$ Ulpp at 1 kHz (20 UI range) Frequency response error referring to error at 1 kHz: $\pm 5\%$ (2 to 20 Hz), $\pm 2\%$ (20 Hz to 300 kHz), $\pm 3\%$ (300 kHz to 1 MHz), $\pm 5\%$ (1 to 3 MHz), $\pm 10\%$ (3 to 6 MHz)</p>	Bit rate (Mb/s)	A1 (Ulpp)	F1 (Hz)	F2*(kHz)	F3*(kHz)	F4*(kHz)	F5*(MHz)	2.048	0.5	2	1	20	27.5	0.11	8.448	0.5	2	2	20	105	0.42	34.368	0.5	2	5	100	250	1	139.264	0.5	2	5	100	1000	4	155.520	0.5	2	6.5	500	150	1.5	622.080	0.5	2	25	500	600	6
Bit rate (Mb/s)	A1 (Ulpp)	F1 (Hz)	F2*(kHz)	F3*(kHz)	F4*(kHz)	F5*(MHz)																																												
2.048	0.5	2	1	20	27.5	0.11																																												
8.448	0.5	2	2	20	105	0.42																																												
34.368	0.5	2	5	100	250	1																																												
139.264	0.5	2	5	100	1000	4																																												
155.520	0.5	2	6.5	500	150	1.5																																												
622.080	0.5	2	25	500	600	6																																												
Auxiliary interface	Ext modulation/10M input, jitter reference clock output (ECL [AC] 50 Ω)																																																	
Jitter tolerance	Conforms to ITU-T G.823, G.825, G.958 Display: Numerical or graphical																																																	
Frequency offset	Range: ± 999 ppm (1 ppm steps), Accuracy: ± 1 ppm																																																	

*1: Typical value (typical values are given for reference only to assist in the use of this instrument, and are not guaranteed specifications.)

• Jitter (Rx) (Option 07)

Bit rate	2.048, 8.448, 34.368, 139.264, 155.520, 622.080 Mb/s																																																								
Jitter measurement	<p>Conforms to ITU-T O.171 Frequency: 2 Hz to 5 MHz Amplitude: 0 to 20.00 Ulpp, 0 to 7.07 Ulrms Resolution: 0.001 Ulpp/0.001 Ulrms (2 UI range), 0.01 Ulpp/0.01 Ulrms (20 UI range)</p> <table border="1"> <thead> <tr> <th>Bit rate (Mb/s)</th> <th>A1 (Ulpp)</th> <th>F1 (Hz)</th> <th>F1' (Hz)</th> <th>F2*(kHz)</th> <th>F3*(kHz)</th> <th>F4*(MHz)</th> <th>F5*(MHz)</th> </tr> </thead> <tbody> <tr> <td>2.048</td> <td>0.5</td> <td>2</td> <td>20</td> <td>0.45</td> <td>-</td> <td>25</td> <td>0.1</td> </tr> <tr> <td>8.448</td> <td>0.5</td> <td>2</td> <td>20</td> <td>0.2</td> <td>-</td> <td>100</td> <td>0.4</td> </tr> <tr> <td>34.368</td> <td>0.5</td> <td>2</td> <td>20</td> <td>0.5</td> <td>-</td> <td>500</td> <td>0.8</td> </tr> <tr> <td>139.264</td> <td>0.5</td> <td>2</td> <td>20</td> <td>0.25</td> <td>-</td> <td>1000</td> <td>3.5</td> </tr> <tr> <td>155.520</td> <td>0.5</td> <td>2</td> <td>20</td> <td>0.7</td> <td>500</td> <td>500</td> <td>1.3</td> </tr> <tr> <td>622.080</td> <td>0.5</td> <td>2</td> <td>20</td> <td>20</td> <td>500</td> <td>2000</td> <td>5</td> </tr> </tbody> </table> <p>[Ulpp] Accuracy: $\pm 5\% \pm 0.01$ Ulpp $\pm X$ Ulpp at 1 kHz (2 UI range), $\pm 5\% \pm 0.1$ Ulpp $\pm X$ Ulpp at 1 kHz (20 UI range) X: 0.025 Ulpp/2 and 8 Mb/s, 0.055 Ulpp/34 Mb/s, 0.085 Ulpp/139 and 156 Mb/sE, 0.13 Ulpp/156 and 622 Mb/sO (+10° to +40°C), 0.25 Ulpp/156 MHz clock, 0.04 Ulpp/622 MHz clock (2 UI range); 0.12 Ulpp/2, 8 and 34 Mb/s, 0.2 Ulpp/139 and 156 Mb/sE, 0.2 Ulpp/156 and 622 Mb/sO (+10° to +40°C), 0.1 Ulpp/156 and 622 MHz clock (20 UI range) Additional 0.01 Ulpp/dB at 156 Mb/sO with input levels <-25 dBm Additional 0.01 Ulpp/dB at 622 Mb/sO with input levels <-20 dBm</p> <p>[Ulrms] Accuracy: $\pm 5\% \pm 0.002$ Ulrms $\pm Y$ Ulrms at 1 kHz (2 UI range), $\pm 5\% \pm 0.02$ Ulrms $\pm Y$ Ulrms at 1 kHz (20 UI range) Y: 0.004 Ulrms/2 and 8 Mb/s, 0.015 Ulrms/34 Mb/s, 0.02 Ulrms/139 and 156 Mb/sE, 0.03 Ulrms/156 and 622 Mb/sO (+10° to +40°C), 0.015 Ulrms/156 MHz clock, 0.025 Ulrms/622 MHz clock (2 UI range); 0.02 Ulrms/2, 8 and 34 Mb/s, 0.04 Ulrms/139 and 156 Mb/sE, 0.06 Ulrms/156 and 622 Mb/sO (+10° to +40°C), 0.03 Ulrms/156 MHz clock, 0.05 Ulrms/622 MHz clock (20 UI range) Additional 0.002 Ulrms/dB at 156 Mb/sO with input levels <-25 dBm Additional 0.002 Ulrms/dB at 622 Mb/sO with input levels <-20 dBm</p> <p>Frequency response error referring to error at 1 kHz: $\pm 5\%$ (2 to 20 Hz), $\pm 2\%$ (20 Hz to 300 kHz), $\pm 3\%$ (300 kHz to 1 MHz), $\pm 5\%$ (1 to 3 MHz), $\pm 10\%$ (3 to 5 MHz)</p>	Bit rate (Mb/s)	A1 (Ulpp)	F1 (Hz)	F1' (Hz)	F2*(kHz)	F3*(kHz)	F4*(MHz)	F5*(MHz)	2.048	0.5	2	20	0.45	-	25	0.1	8.448	0.5	2	20	0.2	-	100	0.4	34.368	0.5	2	20	0.5	-	500	0.8	139.264	0.5	2	20	0.25	-	1000	3.5	155.520	0.5	2	20	0.7	500	500	1.3	622.080	0.5	2	20	20	500	2000	5
Bit rate (Mb/s)	A1 (Ulpp)	F1 (Hz)	F1' (Hz)	F2*(kHz)	F3*(kHz)	F4*(MHz)	F5*(MHz)																																																		
2.048	0.5	2	20	0.45	-	25	0.1																																																		
8.448	0.5	2	20	0.2	-	100	0.4																																																		
34.368	0.5	2	20	0.5	-	500	0.8																																																		
139.264	0.5	2	20	0.25	-	1000	3.5																																																		
155.520	0.5	2	20	0.7	500	500	1.3																																																		
622.080	0.5	2	20	20	500	2000	5																																																		

Continued on next page

Filters						
	Bit rate (Mb/s)	HP1 (Hz)	HP2 (kHz)	HP2' (kHz)	HP (kHz)	LP (MHz)
Jitter measurement	2.048	20	18	0.7	12	0.1
	8.448	20	3	80	12	0.4
	34.368	100	10	-	12	0.8
	139.264	200	10	-	12	3.5
	155.520	500	65	-	12	1.3
	622.080	1000	250	-	12	5
Auxiliary interface	Jitter demodulation output, jitter reference clock input (ECL /AC) 50 Ω					
Hit measurement	Display: Hit count, hit second, %hit-free second					
Jitter transfer	Conforms to ITU-T G.823, G.825 Display: Numerical or graphical					

*1 Typical value (typical values are given for reference only to assist in the use of this instrument, and are not guaranteed specifications.)

• Jitter (Rx)/2M Wander (Option 08)

Wander measurement	2.048 Mb/s Reference input: Clock or HDB3 (unbalanced) Measurement range: p-p: 0.0 to 2E8 ns, +p/-p: 0.0 to 1E8 ns, TIE: 0.0 to ±1E8 ns
Jitter (Rx)	Same as Option 07

• Built-in CMI (156M) (Option 10)

The specifications are the same as the MP0105A CMI Unit.

• MP0104A Optical 156M (1.31) Unit

Transmit	155.520 Mb/s (NRZ) Wavelength: 1310 nm Power: -15 to -8 dBm IEC825-1: CLASS 1 LASER PRODUCT Connector: FC-PC (SM-F)
Receive	155.520 Mb/s (NRZ) Sensitivity: -34 to -8 dBm (with test pattern: PRBS 2 ²³ -1 at BER of 10 ⁻¹⁰) Connector: FC-PC (GI-F)

• MP0109A Optical 156M/622M (1.31) Unit

Transmit	155.520, 622.080 Mb/s (NRZ) Wavelength: 1310 nm Power: -15 to -8 dBm IEC825-1: CLASS 1 LASER PRODUCT, 21 CFR 1040.10: CLASS 1 LASER PRODUCT Connector: FC-PC (SM-F)
Receive	155.520, 622.080 Mb/s (NRZ) Sensitivity: 156M: -33 to -8 dBm (with test pattern: PRBS 2 ²³ -1 at BER of 10 ⁻¹⁰ , +10° to +40°C) 622M: -28 to -8 dBm (with test pattern: PRBS 2 ²³ -1 at BER of 10 ⁻¹⁰ , +10° to +40°C) Connector: FC-PC (SM-F)

• MP0105A CMI Unit

Transmit	155.520 Mb/s Level: 1±0.1 V Connector: BNC, 75 Ω
Receive	155.520 Mb/s Level: 1±0.1 V (with 0 to 12 dB automatic √I equalization and 20 dB additional gain) Connector: BNC, 75 Ω

• MP0110A Optical 156M/622M (1.55) Unit

Transmit	155.520, 622.080 Mb/s (NRZ) Wavelength: 1550 nm Power: -5 to -1 dBm IEC825-1: CLASS 1 LASER PRODUCT, 21 CFR 1040.10: CLASS 1 LASER PRODUCT Connector: FC-PC (SM-F)
Receive	155.520, 622.080 Mb/s (NRZ) Sensitivity: 156M: -33 to -8 dBm (with test pattern: PRBS 2 ²³ -1 at BER of 10 ⁻¹⁰ , +10° to +40°C) 622M: -28 to -8 dBm (with test pattern: PRBS 2 ²³ -1 at BER of 10 ⁻¹⁰ , +10° to +40°C) Connector: FC-PC (SM-F)

• MP0108A NRZ Unit

Transmit	155.520, 622.080 Mb/s Level: ECL Connector: Clock: SMA (50 Ω), Data: SMA (50 Ω)
Receive	155.520, 622.080 Mb/s Level: ECL (-2 V) Connector: SMA (Clock, 50 Ω), SMA (Data, 50 Ω)

Ordering information

Please specify model/order number, name, and quantity when ordering.

Model/Order No.	Name
MP1550A MP1550B	Main Frame PDH/SDH Analyzer (color display) PDH/SDH Analyzer (monochrome display)
J0670A J0017 Z0169 F0012 F0014 B0329G W0933AE W0934AE W1000AE	Standard accessories AC power cord (for 200 Vac mains): 1 pc AC power cord, 2.5 m (for 100 Vac mains): 1 pc Thermal paper for printer (5 rolls/pack): 1 pack Fuse, 3.15A (for 200 Vac mains): 2 pcs Fuse, 6.3A (for 100 Vac mains): 2 pcs Protective cover: 1 pc MP1550A/B operation manual: 1 copy MP1550A/B remote control operation manual: 1 copy MP1550A/B option 06/07/08 operation manual: 1 copy
MP0104A	Units Optical 156M (1.31) Unit (cannot be done jitter measurement with this unit even when Option 07 or 08 is installed)
MP0105A MP0108A MP0109A MP0110A	CMI Unit NRZ Unit Optical 156M/622M (1.31) Unit Optical 156M/622M (1.55) Unit
Option 01 Option 03 Option 04 Option 06 Option 07 Option 08 Option 10 MP0109A/0110A-38 MP0109A/0110A-39 MP0109A/0110A-40 MP0109A/0110A-43	Options MUX/DEMUX (add PDH MUX/DEMUX functions) RS-232C GPIB Jitter (Tx)/frequency offset Jitter (Rx, Option 07 cannot be upgraded to Option 08) Jitter (Rx)/2M wander Built-in CMI (156M) ST connector (replaceable) DIN connector (replaceable) SC connector (replaceable) HMS-10/A connector (replaceable)
MP1656A	Application equipment Portable STM-16 Analyzer
MZ8012A J0162A J0162B J0775D J0776D J0635B J0322B J0008 B0368A B0369A B0370A W0933BE J0056B	Optional accessories Connector Cleaning Set (for MP0109A/0110A) Balanced cord, M-3192-→M-3192, 1 m Balanced cord, M-3192-→M-3192, 2 m Coaxial cord, BNC-P620-3C-2WS-BNC-P620, 2 m (75 Ω) Coaxial cord, BNC-P-3W-3D-2W-BNC-P-3W, 2 m (50 Ω) Optical fiber cord, 2 m (for SM, both ends with FC-SPC connector) Coaxial cord, 11SMA-SUCOFLEX104-11SMA, 1 m GPIB cable, 2 m Shoulder bag Carrying case Soft case MP1550A/B service manual Optical fiber cord, 2 m (for SM, both ends with FC connector)