



**Model 200A400,
200 Watts CW
10kHz–400MHz**

The Model 200A400 is a self-contained, air-cooled, broadband, completely solid state amplifier designed for applications where instantaneous bandwidth and high gain are required. Push-pull LDMOS circuitry is utilized in all high power stages in the interest of lowering distortion and improving stability. The Model 200A400, when used with an RF sweep generator, will provide a minimum of 200 watts of swept power.

The Model 200A400 is equipped with a Digital Control Panel (DCP) which provides both local and remote control of the amplifier. The DCP uses a 3.75 inch diagonal graphic display, menu assigned softkeys, a single rotary knob, and four dedicated switches to offer extensive control and status reporting capability. The display provides operational presentation of Forward Power and Reflected Power plus control status and reports of internal amplifier status. Special features include a gain control, pulse input capability, forward RF sample port, and a reflective RF sample port for precise power measurements.


All amplifier control functions and status indications are available remotely in GPIB/IEEE-488, RS-232 and USB format. The buss interface connectors are located on the back panel and positive control of local or remote operation is assured by a keylock on the front panel of the amplifier.

High efficiency universal input, power factor corrected switching power supplies provides DC to all internal sub-assemblies.

Housed in a stylish, contemporary enclosure, the Model 200A400 provides readily available RF power for typical applications such as RF susceptibility testing, antenna and component testing, watt meter calibration, particle accelerators, plasma generation, communications and use as a driver for higher power amplifiers.

The export classification of this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

200A400 Typical Power Output

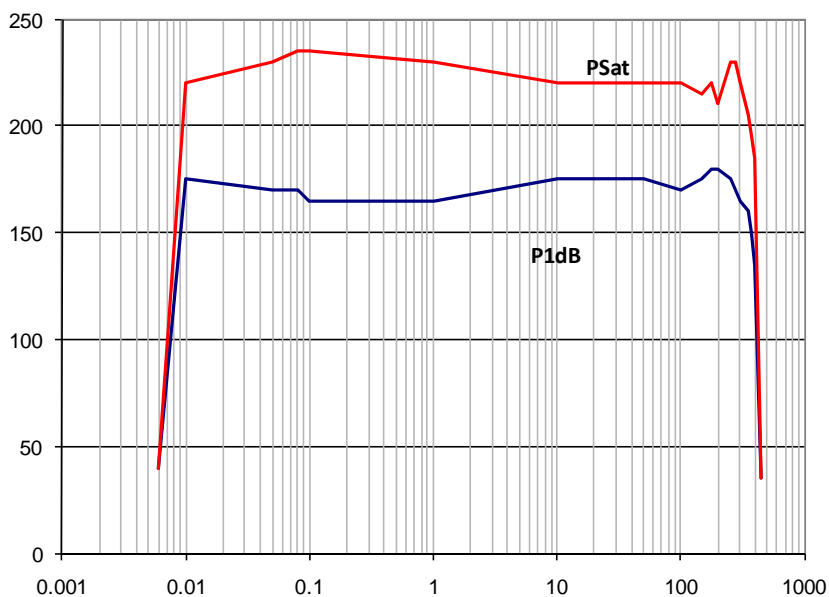

SPECIFICATIONS, MODEL 200A400

RATED OUTPUT POWER	200 watts
INPUT FOR RATED OUTPUT	1.0 milliwatt maximum
POWER OUTPUT @ 3 dB compression	175 watts
POWER OUTPUT @ 1 dB compression	150 watts, 10kHz-250MHz 150-125 watts, 250MHz-400MHz (derated slope of .167W/MHz)
FLATNESS.....	± 3.5 dB maximum
FREQUENCY RESPONSE	10 kHz–400 MHz instantaneously
GAIN (at maximum setting)	53 dB minimum
GAIN ADJUSTMENT (continuous range).....	20 dB minimum
INPUT IMPEDANCE.....	50 ohms, VSWR 1.5:1 maximum
OUTPUT IMPEDANCE	50 ohms, nominal
MISMATCH TOLERANCE	100% rated power without foldback up to 6.0:1 mismatch, above which may limit to 100W reflected power. Will operate without damage or oscillation with any magnitude and phase of source and load impedance.
MODULATION CAPABILITY.....	Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal
PULSE MODE GATING CHARACTERISTICS	
Signal (into 50 ohms)	+3.0 to 6.0 VDC
HARMONIC DISTORTION.....	Minus 20 dBc maximum at 100 watts
THIRD ORDER INTERCEPT POINT	65 dBm typical
RF POWER DISPLAY	0–350 watts full scale
PRIMARY POWER	180–264 VAC 47–63 Hz, 1250 watts maximum @ 0.99 P.F. typical
CONNECTORS	
RF input	See Model Configurations
RF output	See Model Configurations
Forward Sample.....	BNC female on front panel (coupling factor 60 dB typical; data supplied)
Reverse Sample.....	BNC female on front panel (coupling factor 60 dB typical)
Pulse Modulation Input.....	BNC female on rear panel
Safety Interlock.....	15 pin female Type D on rear panel
REMOTE CONTROL	
IEEE-488.....	24-pin female on rear panel
RS-232	9 pin female Type D on rear panel
USB.....	Type B female
COOLING.....	Forced air (self contained fans)
WEIGHT, maximum	45.8 kg (101 lbs)
SIZE (W x H x D).....	50.3 x 34 x 56.9 cm (19.8 x 13.4 x 22.0 in)
EXPORT CLASSIFICATION	EAR99

MODEL CONFIGURATIONS

MODEL NUMBER	RF INPUT	RF OUTPUT
200A400	Type N female, front	Type N female, front
200A400M1	Type N female, rear	Type N female, rear