

PIM 155

100kHz & 1MHz Oscillating Magnetic Field Module

■ IEC 61000-4-10 describe an oscillating magnetic field generator. The oscillating magnetic field is used to test the immunity of electronic equipment to be installed in high voltage sub-stations.

Safety is paramount when AC and impulse voltages are being used. The PIM 155 High Voltage connections are all designed so no accidental contact can occur.

PIM 155 with the PSURGE 8000 Surge Platform can perform all the programming functions required to perform IEC and ANSI testing without the need of a control computer.

A high accuracy current probe is delivered with the PIM155 to verify the induction coil currents.

The integration in the WinFEAT&R control and reporting software package enhances an efficient set-up and operation of this test system. Most importantly, the test load can be transferred to a computer freeing valuable resources.

FEATURES

- 100kHz & 1MHz frequencies
- Magnetic field strength up to 100A/m
- Repetition rate of 400Hz @ 1MHz
- Variable burst duration

BENEFITS

International application – Specifically designed to meet and exceed the requirements of IEC, EN, and ANSI tests for power line applications.



Safe and Easy - The interlocked HV section and the specially designed output sockets, allow your operators to test safely and easily.

Sturdy and Reliable - Careful component selection ensures that the PIM 155 will continue to operate under the most strenuous testing conditions.

Report Generation - The unit can automatically generate test reports without a computer. Add WinFEAT&R control and reporting software to collect and collate data in any format you like.

APPLICATIONS

- IEC 61000-4-10
- EN 61000-4-10

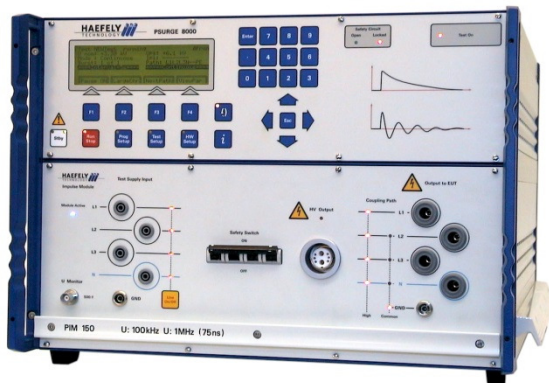

TECHNICAL SPECIFICATIONS

Burst Frequency	100kHz & 1MHz	Impulse Polarity	Positive, Negative & Alternating
Impulse Repetition	40 Hz & 400Hz	Damping Rate	50% Vpk between 5th and 10th peak
Current Range	6.5 – 120A	Coil Factor	0.83
Magnetic Field Strength	5.4A/m...100A/m		

Weights and Dimensions

45 x 20 x 57 cm (W x H x D)	44 lbs (29 kg net weight)
-----------------------------	---------------------------


PIM 155 ART. NO. 2491941

- Qty. 1 PIM 155 Impulse Module
- Qty. 1 HV DC Bus cable 1m
- Qty. 1 HAEFELY HIPOTRONICS Bus cable 0.5m
- Qty. 1 Earth bonding cable 1m
- Qty. 1 Earth bonding cable 0.25m
- Qty. 1 MSURGE Coil 1m x 1m
- Qty. 1 Users Manual

OPTIONS AND ACCESSORIES

- WinFEAT&R** Control and reporting software. Runs under windows 98, NT, ME, 2000, XP
- Rack Mounting** Modules can be rack mounted for greater mechanical stability and mobility.

WinFEAT&R Control Window

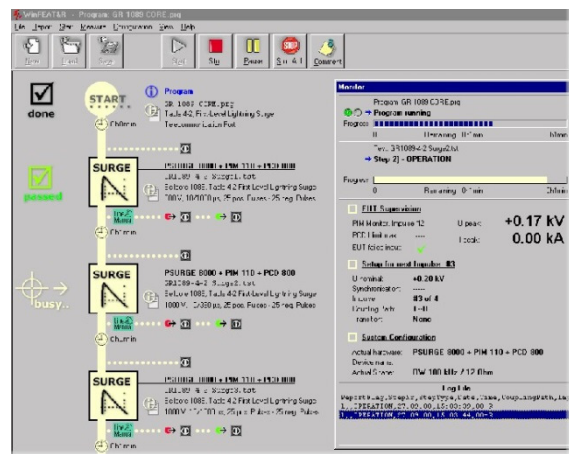

OFFICES:

Europe

Haefely Test AG
Birsstrasse 300
4052 Basel
Switzerland

+ 41 61 373 4111
+ 41 61 373 4912
sales@haefely.com

China

Haefely Test AG Representative Beijing Office
8-1-602, Fortune Street
No. 67, Chaoyang Road, Chaoyang District
Beijing, China 100025

+ 86 10 8578 8099
+ 86 10 8578 9908
sales@haefely.com.cn

North America

Hipotronics, Inc.
1650 Route 22 N
Brewster, NY 10509
United States

+ 1 845 279 3644
+ 1 845 279 2467
sales@hipotronics.com