

R&S® BBA130 Broadband Amplifier Specifications



3 year warranty

CONTENTS

| | |
|---|-----------|
| Definitions | 4 |
| Frequency band from 80 MHz to 1 GHz..... | 5 |
| Power class 100 W | 5 |
| Power class 180 W | 7 |
| Power class 240 W | 9 |
| Power class 350 W | 11 |
| Power class 750 W | 13 |
| Power class 1500 W | 15 |
| Power class 1800 W | 17 |
| Power class 2100 W | 19 |
| Power class 2700 W | 21 |
| Power class 4200 W | 23 |
| Frequency band from 690 MHz to 3.2 GHz..... | 25 |
| Power class 45 W | 25 |
| Power class 90 W | 27 |
| Power class 160 W | 29 |
| Power class 300 W | 31 |
| Power class 600 W | 33 |
| Power class 1200 W | 35 |
| Frequency band from 2.5 GHz to 6.0 GHz..... | 37 |
| Power class 22 W | 37 |
| Power class 45 W | 39 |
| Power class 90 W | 41 |
| Power class 150 W | 43 |
| Power class 280 W | 45 |
| Power class 550 W | 47 |
| General data | 49 |
| Modulation specifications..... | 49 |
| Cooling specifications | 49 |
| Control specifications..... | 49 |
| Environmental specifications | 50 |
| Protection | 50 |
| General RF specifications..... | 51 |
| RF switching specifications – input and measurement | 51 |
| RF switching specifications – output | 52 |
| Fast amplifier mute specifications | 53 |

| | |
|--|-----------|
| Ordering information | 54 |
| R&S®BBA130 single-band power amplifiers..... | 54 |
| R&S®BBA130 twin-band power amplifiers | 54 |
| R&S®BBA130 dual-band power amplifiers | 55 |
| Options..... | 55 |
| Service | 56 |
| Accessories..... | 56 |

RoHS Europe, Directive 2011/65/EU: Equipment category 9, fulfilled without any exceptions.

WEEE Europe, Directive 2002/96/EC:

No disposing with unsorted municipal waste; no return with collection of waste electrical and electronic equipment from private households. Separate collection necessary. Ask Rohde & Schwarz representatives about recovery.

Definitions

General

Product data applies under the following conditions:

15 minutes warm-up operation at ambient temperature

All specified parameters are valid for an ambient temperature of + 25 °C, input impedance of 50 Ω and output impedance of 50 Ω


Specified environmental conditions met

Recommended calibration interval adhered to

All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

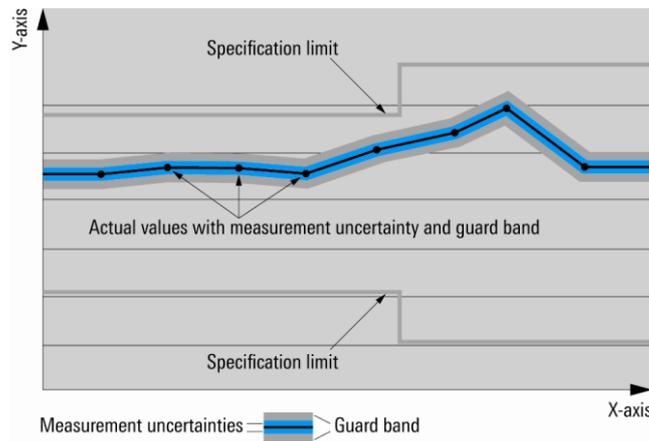

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.


Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Frequency band from 80 MHz to 1 GHz

Power class 100 W

Frequency response at high power (high power mode)

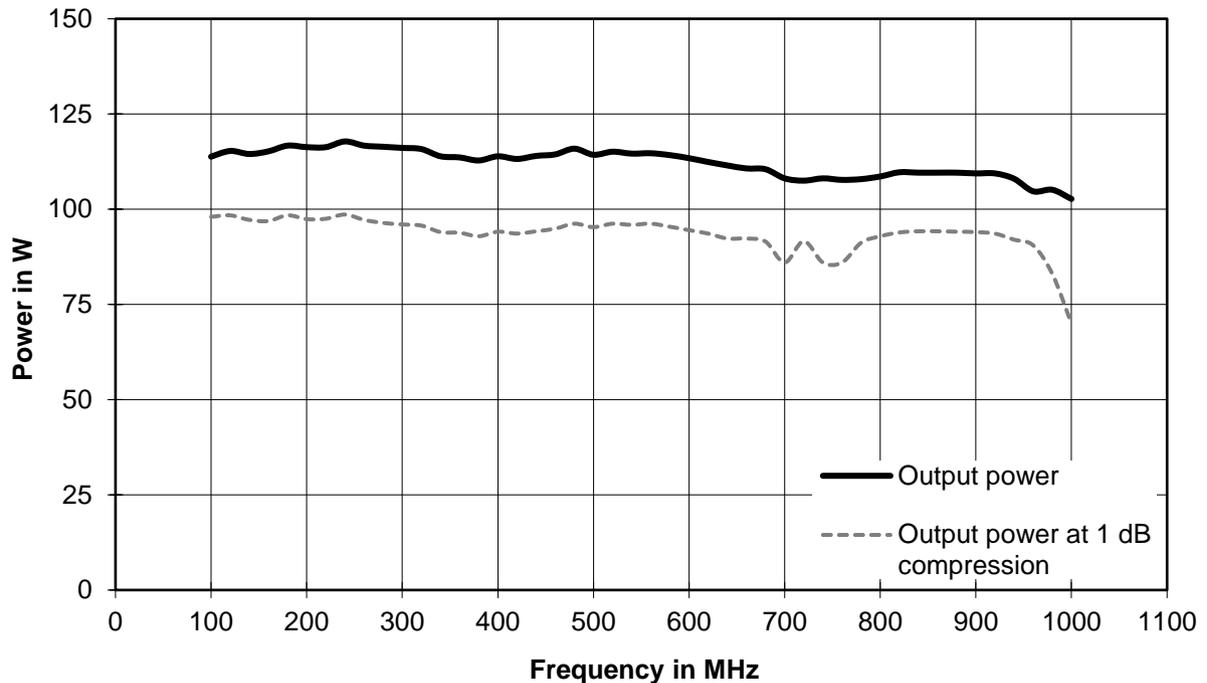

RF specifications

| Main parameters | | |
|----------------------------------|--|---------------------------------|
| Frequency range | | 80 MHz to 1 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 100 W (50.0 dBm) |
| Output power | output mode set to <i>High Power</i> | min. 100 W (50.0 dBm) |
| Output power at 1 dB compression | | min. 70 W (48.5 dBm) |
| Nominal power gain | at 400 MHz | nom. 53.1 dB |
| Gain flatness | | ± 3 dB |
| Harmonics | at 70 W, class A | < -20 dBc |
| Spurious | at 70 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -65 dBc |
| Noise figure | at maximum gain of nom. 70 dB | nom. < 10 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 57 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 16 kg (35 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|--|--|
| Nominal operating voltage range | | 100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 8.6 A |
| | at 230 V | 4.1 A |
| Rated power | RF _{cw} = 100 W (RMS), VSWR = 1 | 930 VA |

Power class 180 W

Frequency response at high power (high power mode)

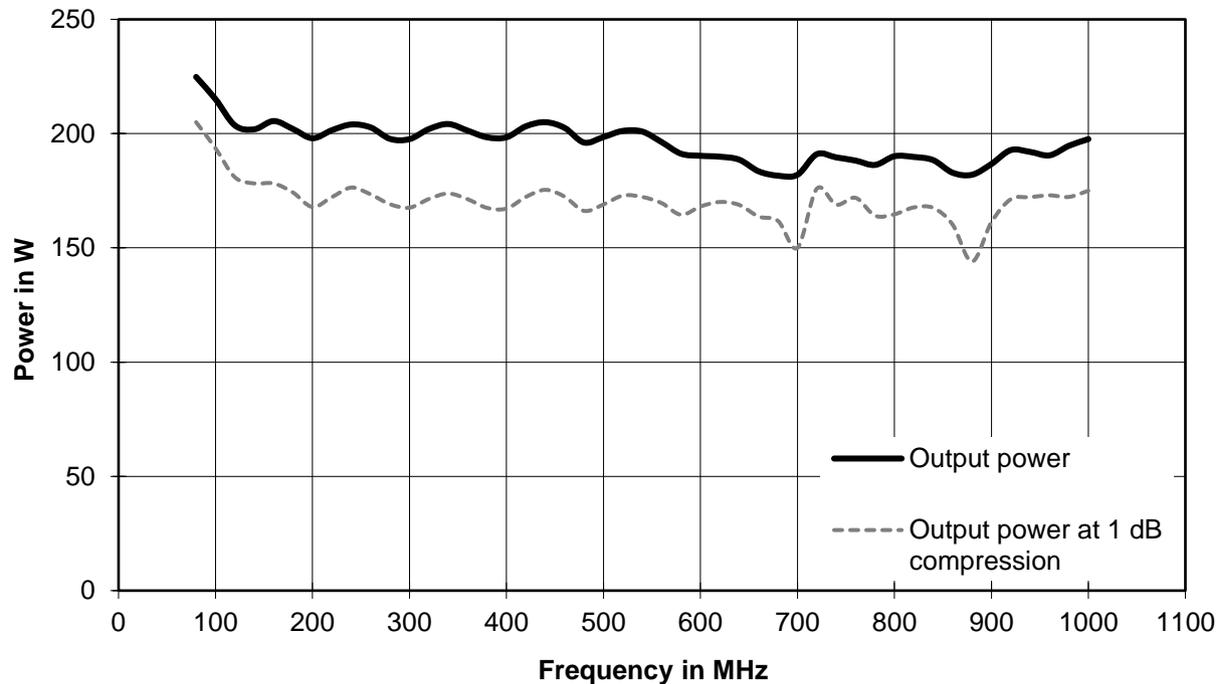

RF specifications

| Main parameters | | |
|----------------------------------|---|---------------------------------|
| Frequency range | | 80 MHz to 1 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 180 W (52.6 dBm) |
| Output power | output mode set to <i>High Power</i> | min. 180 W (52.6 dBm) |
| Output power at 1 dB compression | < 400 MHz | min. 140 W (51.5 dBm) |
| | \geq 400 MHz | min. 125 W (50.9 dBm) |
| Nominal power gain | at 400 MHz | nom. 56.0 dB |
| Gain flatness | | ± 3 dB |
| Harmonics | at 125 W, class A, entire band except 320 MHz to 550 MHz | < -20 dBc |
| | at 125 W, class A, 320 MHz to 550 MHz | < -17 dBc |
| Spurious | at 125 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -65 dBc |
| Noise figure | at maximum gain of nom. 70 dB | nom. < 10 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 57 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 16 kg (35 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|--|--|
| Nominal operating voltage range | | 100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 8.6 A |
| | at 230 V | 4.1 A |
| Rated power | RF _{cw} = 180 W (RMS), VSWR = 1 | 930 VA |

Power class 240 W

Frequency response at high power (high power mode)

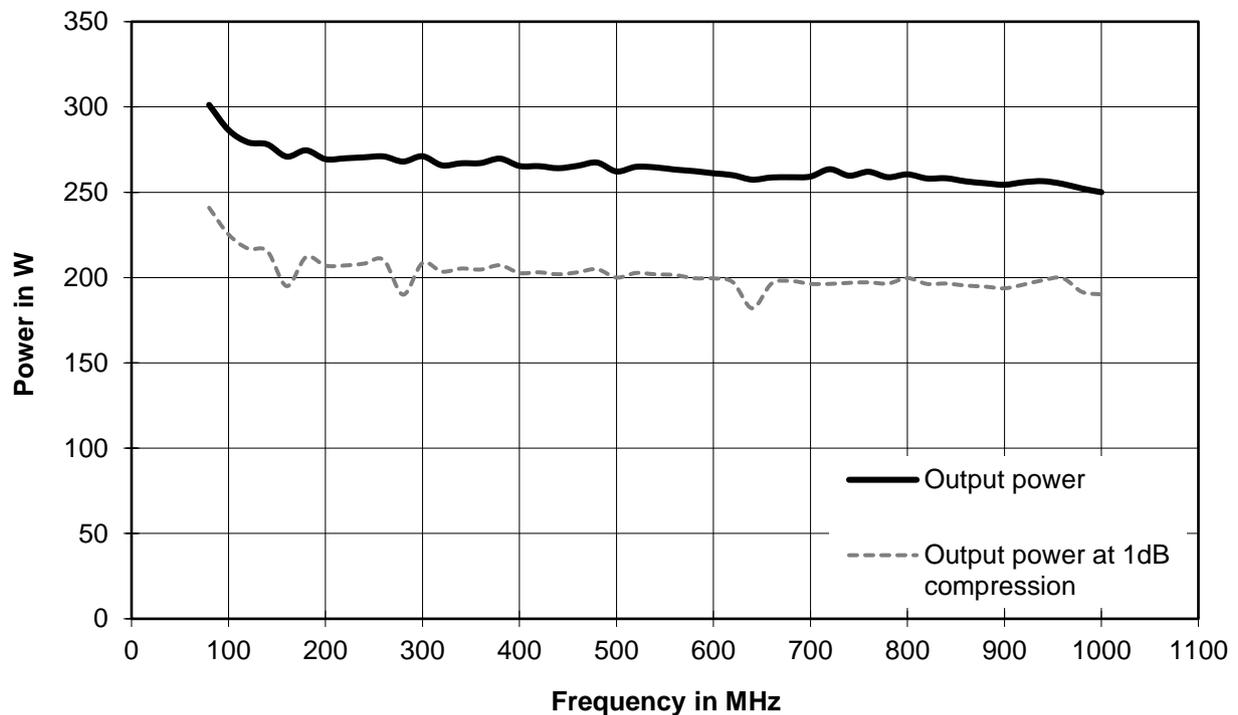

RF specifications

| Main parameters | | |
|----------------------------------|---|---------------------------------|
| Frequency range | | 80 MHz to 1 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 240 W (53.8 dBm) |
| Output power | output mode set to <i>High Power</i> | min. 240 W (53.8 dBm) |
| Output power at 1 dB compression | < 400 MHz | min. 175 W (52.4 dBm) |
| | > 400 MHz | min. 160 W (52.0 dBm) |
| Nominal power gain | at 400 MHz | nom. 57.2 dB |
| Gain flatness | | ± 3 dB |
| Harmonics | at 160 W, class A, entire band except 320 MHz to 550 MHz | < -20 dBc |
| | at 160 W, class A, 320 MHz to 550 MHz | < -17 dBc |
| Spurious | at 160 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -65 dBc |
| Noise figure | at maximum gain of nom. 65 dB | nom. < 10 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 57 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 21 kg (46 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|--|--|
| Nominal operating voltage range | | 110 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 17.3 A |
| | at 230 V | 8.3 A |
| Rated power | RF _{ow} = 240 W (RMS), VSWR = 1 | 1.9 kVA |

Power class 350 W

Frequency response at high power (high power mode)

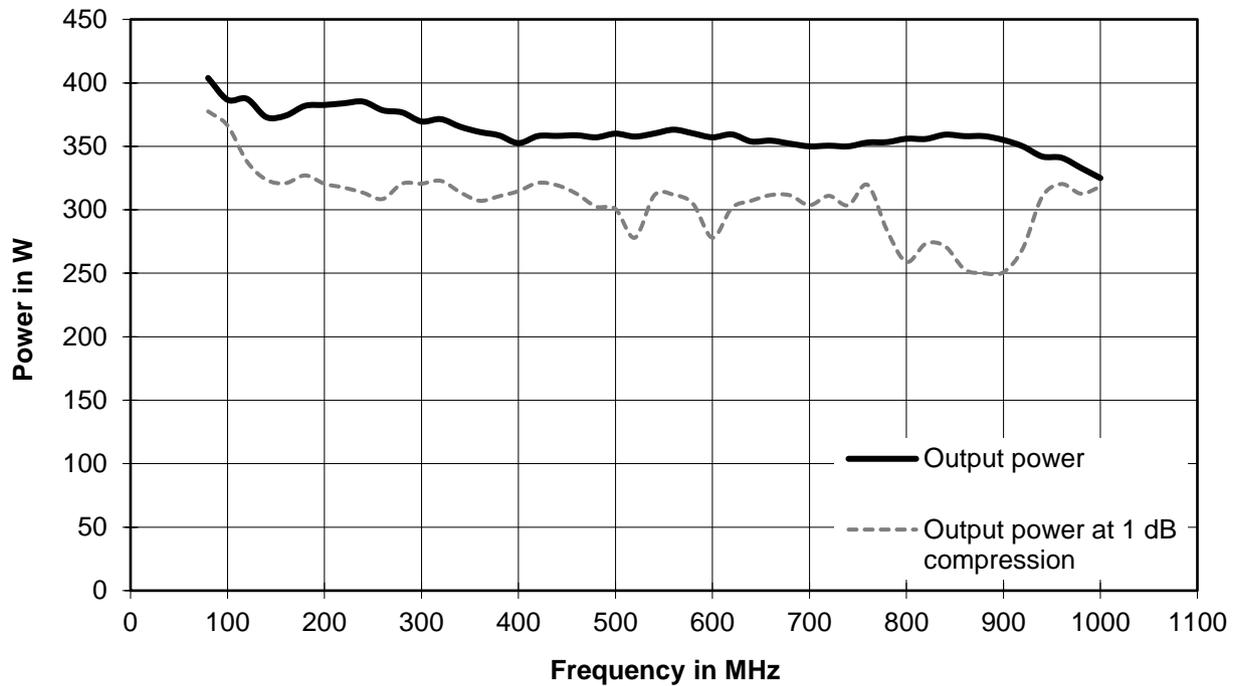

RF specifications

| Main parameters | | |
|----------------------------------|---|---------------------------------|
| Frequency range | | 80 MHz to 1 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 350 W (55.4 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 400 MHz | min. 340 W (55.3 dBm) |
| | \geq 400 MHz | min. 300 W (54.8 dBm) |
| Output power at 1 dB compression | < 400 MHz | min. 275 W (54.4 dBm) |
| | \geq 400 MHz | min. 225 W (53.5 dBm) |
| Nominal power gain | at 400 MHz | nom. 59.1 dB |
| Gain flatness | | ± 3 dB |
| Harmonics | at 250 W, class A, entire band except 320 MHz to 550 MHz | < -20 dBc |
| | at 250 W, class A, 320 MHz to 550 MHz | < -17 dBc |
| Spurious | at 250 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -65 dBc |
| Noise figure | at maximum gain of nom. 65 dB | nom. < 10 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 58 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 21 kg (46 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|--|--|
| Nominal operating voltage range | | 110 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 17.3 A |
| | at 230 V | 8.3 A |
| Rated power | RF _{cw} = 350 W (RMS), VSWR = 1 | 1.9 kVA |

Power class 750 W

Frequency response at high power (high power mode)

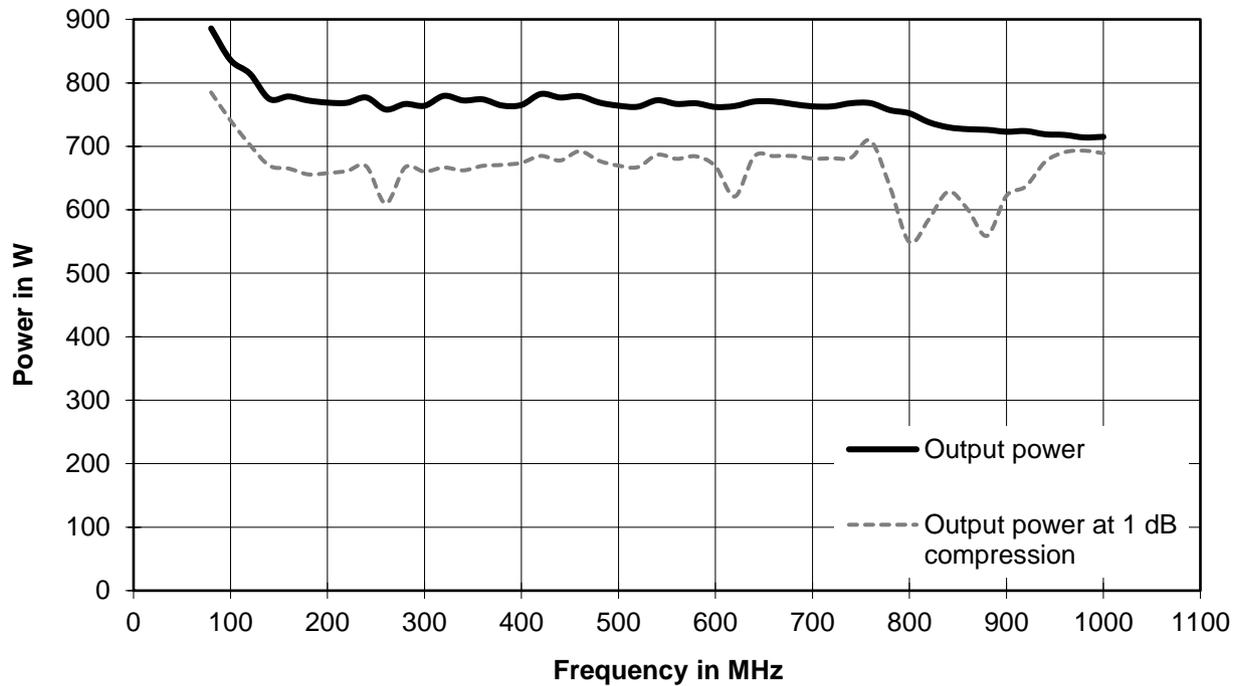

RF specifications

| Main parameters | | |
|----------------------------------|---|---------------------------------|
| Frequency range | | 80 MHz to 1 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 750 W (58.7 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 400 MHz | min. 750 W (58.7 dBm) |
| | ≥ 400 MHz < 740 MHz | min. 650 W (58.1 dBm) |
| Output power at 1 dB compression | ≥ 740 MHz | min. 600 W (57.8 dBm) |
| | < 400 MHz | min. 550 W (57.4 dBm) |
| Nominal power gain | ≥ 400 MHz | min. 480 W (56.8 dBm) |
| | at 400 MHz | nom. 62.1 dB |
| Gain flatness | | ±3 dB |
| Harmonics | at 500 W, class A, entire band except 320 MHz to 550 MHz | < -20 dBc |
| | at 500 W, class A, 320 MHz to 550 MHz | < -17 dBc |
| Spurious | at 500 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 75 dB | nom. < 10 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 58 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 33 kg (73 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|--|---|
| Nominal operating voltage range | | 200 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| | optional | 380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % |
| | | 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 230 V | 12.6 A |
| Rated power | RF _{cw} = 750 W (RMS), VSWR = 1 | 2.9 kVA |

Power class 1500 W

Frequency response at high power (high power mode)

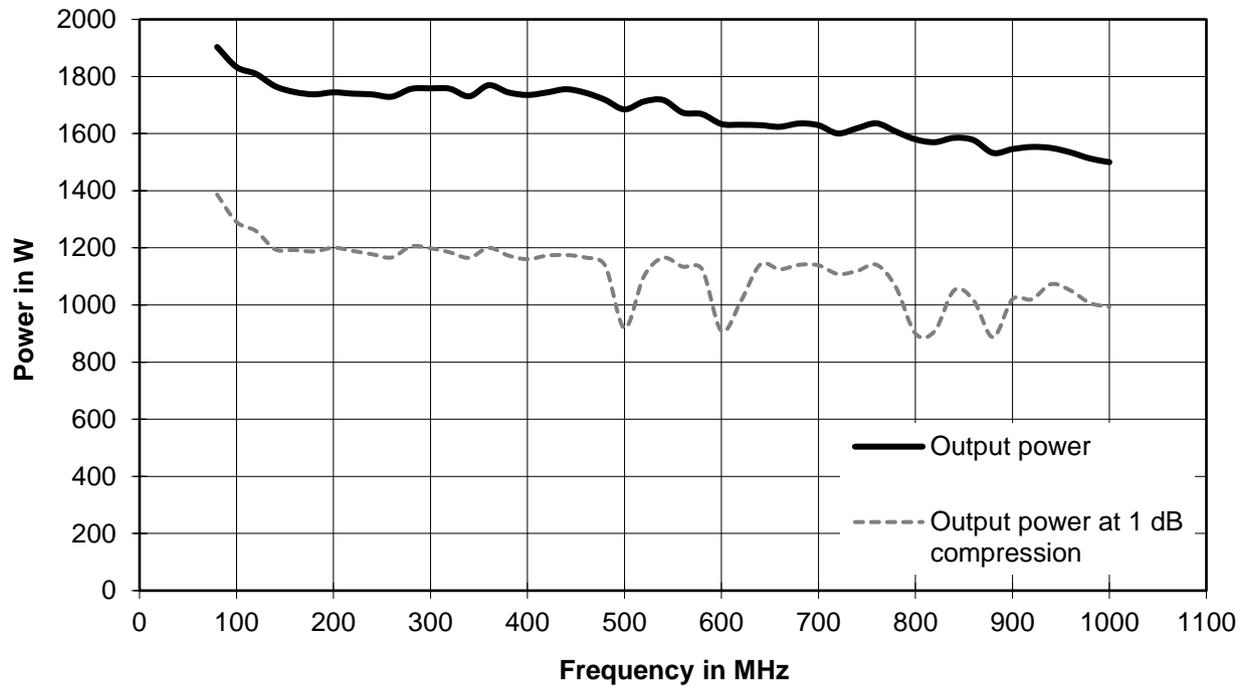

RF specifications

| Main parameters | | |
|----------------------------------|--|---------------------------------|
| Frequency range | | 80 MHz to 1 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 1500 W (61.7 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 400 MHz | min. 1400 W (61.5 dBm) |
| | ≥ 400 MHz < 740 MHz | min. 1200 W (60.8 dBm) |
| Output power at 1 dB compression | ≥ 740 MHz | min. 1100 W (60.4 dBm) |
| | < 400 MHz | min. 1000 W (60.0 dBm) |
| | ≥ 400 MHz | min. 850 W (59.3 dBm) |
| Nominal power gain | at 400 MHz | nom. 65.1 dB |
| Gain flatness | | ±3.5 dB |
| Harmonics | at 1000 W, class A, entire band except 320 MHz to 550 MHz | < -20 dBc |
| | at 1000 W, class A, 320 MHz to 550 MHz | < -17 dBc |
| Spurious | at 1000 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 72 dB | nom. < 10 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 66 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|-----------------------------|--|
| Dimensions | rack setup | 19" rack, 12 HU, depth: 800 mm (31.5 in) |
| Weight | amplifier system incl. rack | approx. 120 kg (265 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|---------------------------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | rear panel | $\frac{7}{16}$ DIN female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|---|---|
| Nominal operating voltage range | | 380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % |
| | optional | 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 230 V per phase | 13.0 A/13.0 A/0.1 A |
| Rated power | RF _{cw} = 1500 W (RMS), VSWR = 1 | 6.0 kVA |

Power class 1800 W

Frequency response at high power (high power mode)

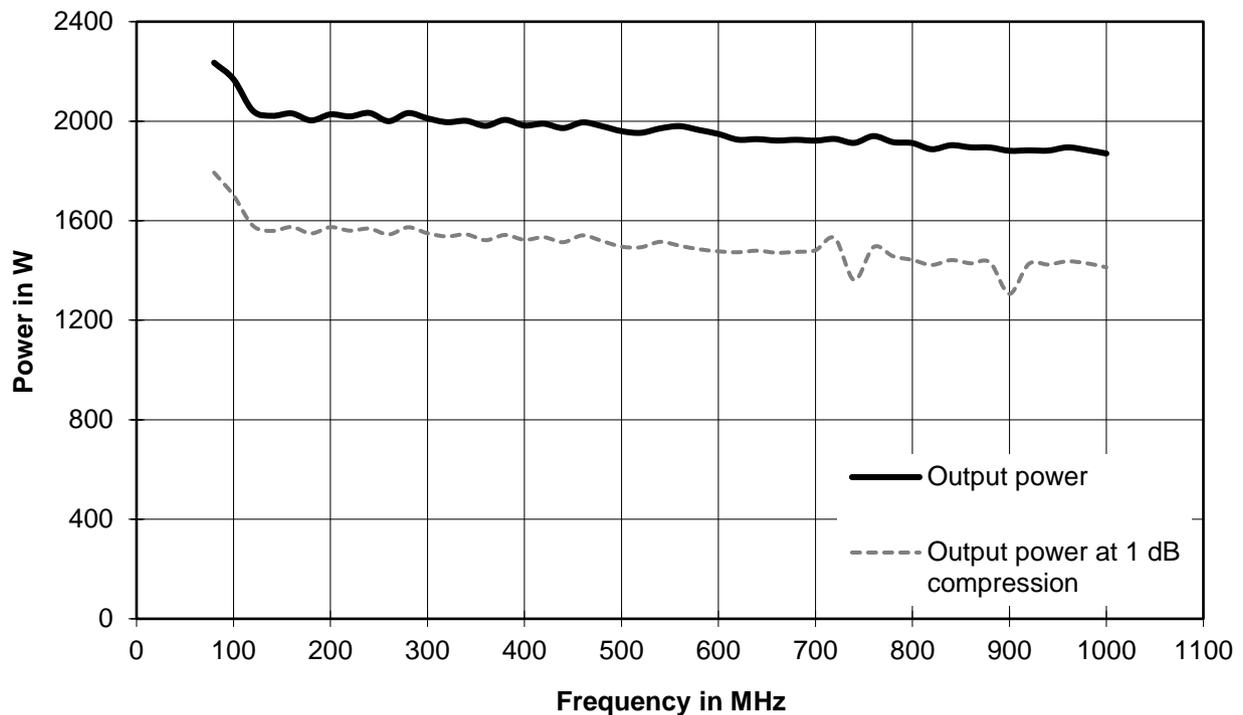

RF specifications

| Main parameters | | |
|----------------------------------|--|---------------------------------|
| Frequency range | | 80 MHz to 1 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 1800 W (62.5 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 400 MHz | min. 1800 W (62.6 dBm) |
| | \geq 400 MHz < 740 MHz | min. 1700 W (62.3 dBm) |
| | \geq 740 MHz | min. 1500 W (61.8 dBm) |
| Output power at 1 dB compression | | min. 1250 W (60.9 dBm) |
| Nominal power gain | at 400 MHz | nom. 65.9 dB |
| Gain flatness | | ± 4 dB |
| Harmonics | at 1250 W, class A, entire band except 320 MHz to 550 MHz | < -20 dBc |
| | at 1250 W, class A, 320 MHz to 550 MHz | < -17 dBc |
| Spurious | at 1250 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 72 dB | nom. < 10 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 66 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|-----------------------------|---|
| Dimensions | rack setup | 19" rack, 20 HU, depth: 1000 mm (39.4 in) |
| Weight | amplifier system incl. rack | approx. 180 kg (397 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|------------------------------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | rear panel | 1 $\frac{5}{8}$ " EIA female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|---|---|
| Nominal operating voltage range | | 380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % |
| | optional | 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 230 V per phase | 12.7 A |
| Rated power | RF _{cw} = 1800 W (RMS), VSWR = 1 | 8.7 kVA |

Power class 2100 W

Frequency response at high power (high power mode)

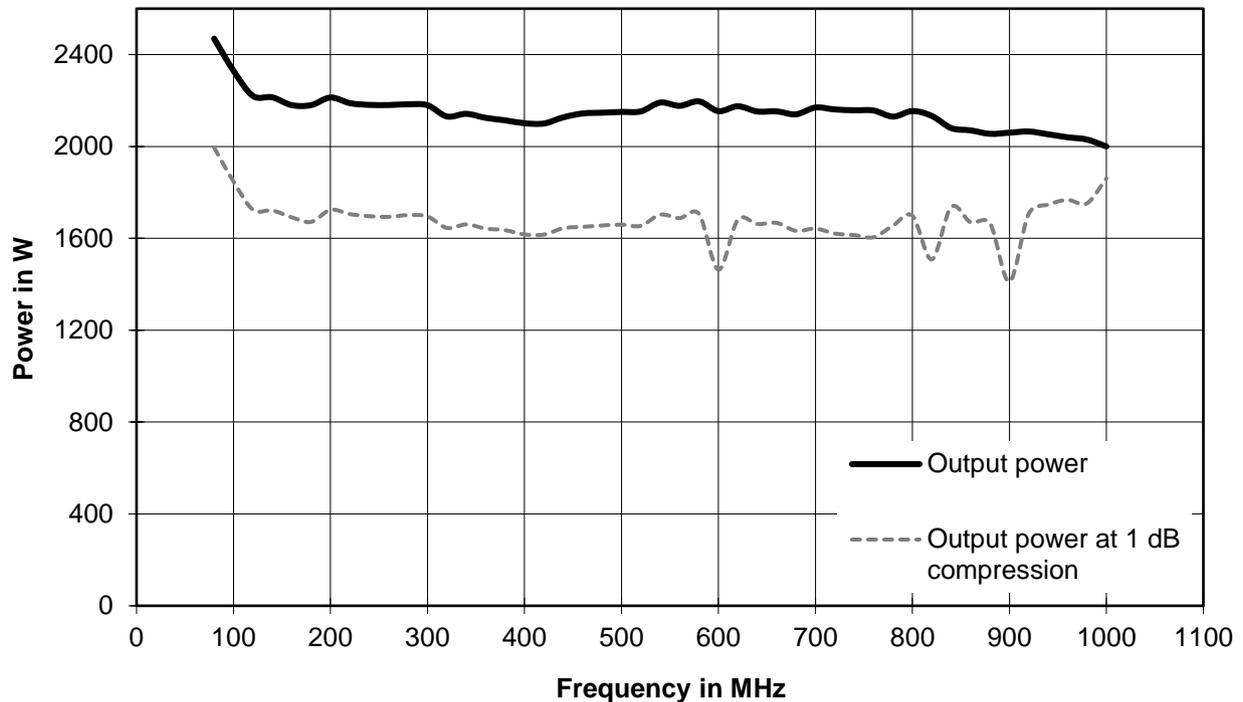

RF specifications

| Main parameters | | |
|----------------------------------|--|---------------------------------|
| Frequency range | | 80 MHz to 1 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 2100 W (63.2 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 400 MHz | min. 2100 W (63.5 dBm) |
| | ≥ 400 MHz < 740 MHz | min. 1800 W (62.6 dBm) |
| Output power at 1 dB compression | ≥ 740 MHz | min. 1600 W (62.0 dBm) |
| | < 400 MHz | min. 1500 W (61.8 dBm) |
| Nominal power gain | ≥ 400 MHz | min. 1300 W (61.2 dBm) |
| | at 400 MHz | nom. 66.9 dB |
| Gain flatness | | ±4 dB |
| Harmonics | at 1500 W, class A, entire band except 320 MHz to 550 MHz | < -20 dBc |
| | at 1500 W, class A, 320 MHz to 550 MHz | < -17 dBc |
| Spurious | at 1500 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 72 dB | nom. < 10 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 66 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|-----------------------------|---|
| Dimensions | rack setup | 19" rack, 20 HU, depth: 1000 mm (39.4 in) |
| Weight | amplifier system incl. rack | approx. 180 kg (397 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|------------------------------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | rear panel | 1 $\frac{5}{8}$ " EIA female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|---|---|
| Nominal operating voltage range | | 380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % |
| | optional | 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 230 V per phase | 12.7 A |
| Rated power | RF _{cw} = 2100 W (RMS), VSWR = 1 | 8.7 kVA |

Power class 2700 W

Frequency response at high power (high power mode)

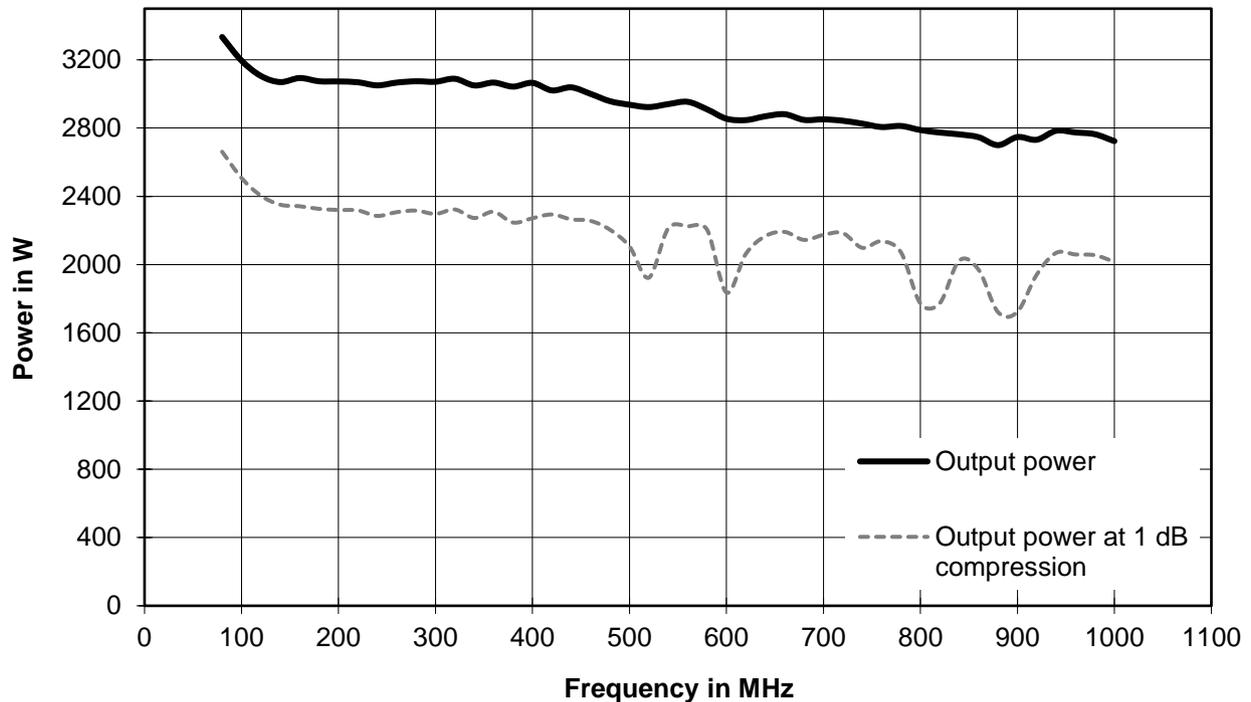

RF specifications

| Main parameters | | |
|----------------------------------|--|---------------------------------|
| Frequency range | | 80 MHz to 1 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 2700 W (64.3 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 400 MHz | min. 2700 W (64.3 dBm) |
| | \geq 400 MHz < 740 MHz | min. 2200 W (63.4 dBm) |
| Output power at 1 dB compression | \geq 740 MHz | min. 2000 W (63.0 dBm) |
| | < 400 MHz | min. 2000 W (63.0 dBm) |
| Nominal power gain | \geq 400 MHz | min. 1600 W (62.0 dBm) |
| | at 400 MHz | nom. 67.7 dB |
| Gain flatness | | ± 4 dB |
| Harmonics | at 2000 W, class A, entire band except 320 MHz to 550 MHz | < -20 dBc |
| | at 2000 W, class A, 320 MHz to 550 MHz | < -17 dBc |
| Spurious | at 2000 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 72 dB | nom. < 10 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 74 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|-----------------------------|---|
| Dimensions | rack setup | 19" rack, 20 HU, depth: 1000 mm (39.4 in) |
| Weight | amplifier system incl. rack | approx. 240 kg (551 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|------------------------------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | rear panel | 1 $\frac{5}{8}$ " EIA female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|---|---|
| Nominal operating voltage range | | 380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % |
| | optional | 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 230 V per phase | 25.2 A/12.6 A/12.6 A |
| Rated power | RF _{cw} = 2700 W (RMS), VSWR = 1 | 11.6 kVA |

Power class 4200 W

Frequency response at high power (high power mode)

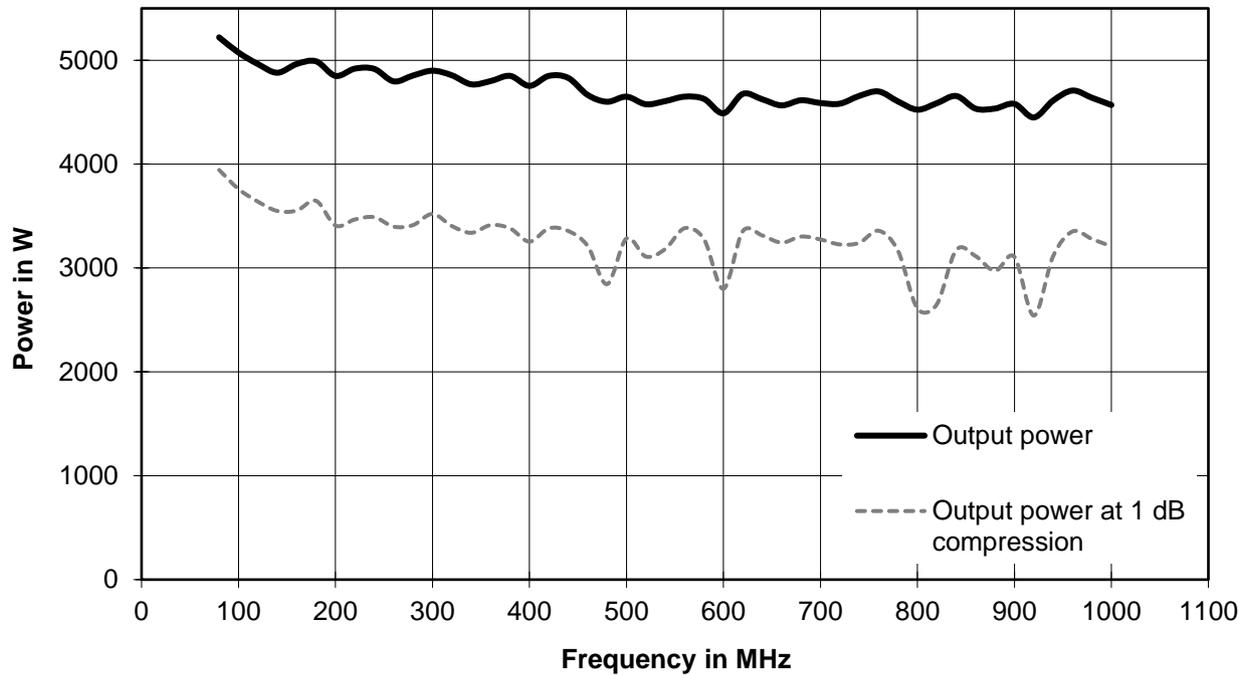

RF specifications

| Main parameters | | |
|----------------------------------|--|---------------------------------|
| Frequency range | | 80 MHz to 1 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 4200 W (66.2 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 400 MHz | min. 4200 W (66.2 dBm) |
| | \geq 400 MHz < 740 MHz | min. 3500 W (65.4 dBm) |
| Output power at 1 dB compression | \geq 740 MHz | min. 3200 W (65.1 dBm) |
| | < 400 MHz | min. 3000 W (64.8 dBm) |
| Nominal power gain | \geq 400 MHz | min. 2400 W (63.8 dBm) |
| | at 400 MHz | nom. 68.2 dB |
| Gain flatness | | ± 4 dB |
| Harmonics | at 3000 W, class A, entire band except 320 MHz to 550 MHz | < -20 dBc |
| | at 3000 W, class A, 320 MHz to 550 MHz | < -17 dBc |
| Spurious | at 3000 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 70 dB | nom. < 10 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 74 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|-----------------------------|---|
| Dimensions | rack setup | 19" rack, 35 HU, depth: 1000 mm (39.4 in) |
| Weight | amplifier system incl. rack | approx. 310 kg (551 lb) |

| RF and sample connectors | | |
|---------------------------------|----------------------------------|------------------------------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | rear panel | 1 $\frac{5}{8}$ " EIA female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |


Electrical specifications

| AC supply voltage | | |
|---------------------------------|---|---|
| Nominal operating voltage range | | 380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % |
| | optional | 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 230 V, per phase | 23.8 A/23.8 A/23.8 A |
| Rated power | RF _{cw} = 4200 W (RMS), VSWR = 1 | 17.0 kVA |

Frequency band from 690 MHz to 3.2 GHz

Power class 45 W

Frequency response at high power (high power mode)

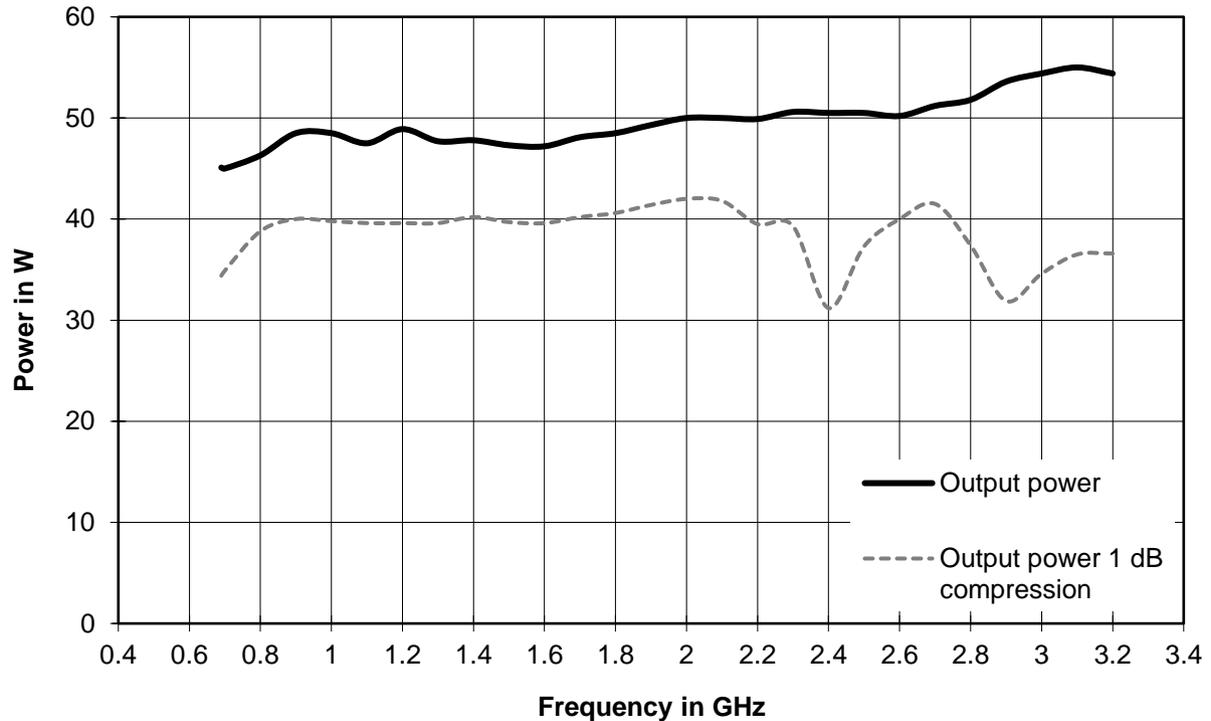

RF specifications

| Main parameters | | |
|----------------------------------|--|-------------------------------------|
| Frequency range | | 0.69 GHz to 3.2 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 45 W (46.5 dBm) |
| Output power | output mode set to <i>High Power</i> | min. 45 W (46.5 dBm) |
| Output power at 1 dB compression | | min. 30 W (44.8 dBm) |
| Nominal power gain | at 3000 MHz | nom. 49.9 dB |
| Gain flatness | | ± 2.0 dB |
| Harmonics | at 30 W, class A, < 1.1 GHz | < -18 dBc |
| | at 30 W, class A, ≥ 1.1 GHz | < -20 dBc |
| Spurious | at 30 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 56 dB | nom. < 17.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 46 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 11 kg (24 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|---|--|
| Nominal operating voltage range | | 100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 3.5 A |
| | at 230 V | 1.7 A |
| Rated power | RF _{cw} = 45 W (RMS), VSWR = 1 | 380 VA |

Power class 90 W

Frequency response at high power (high power mode)

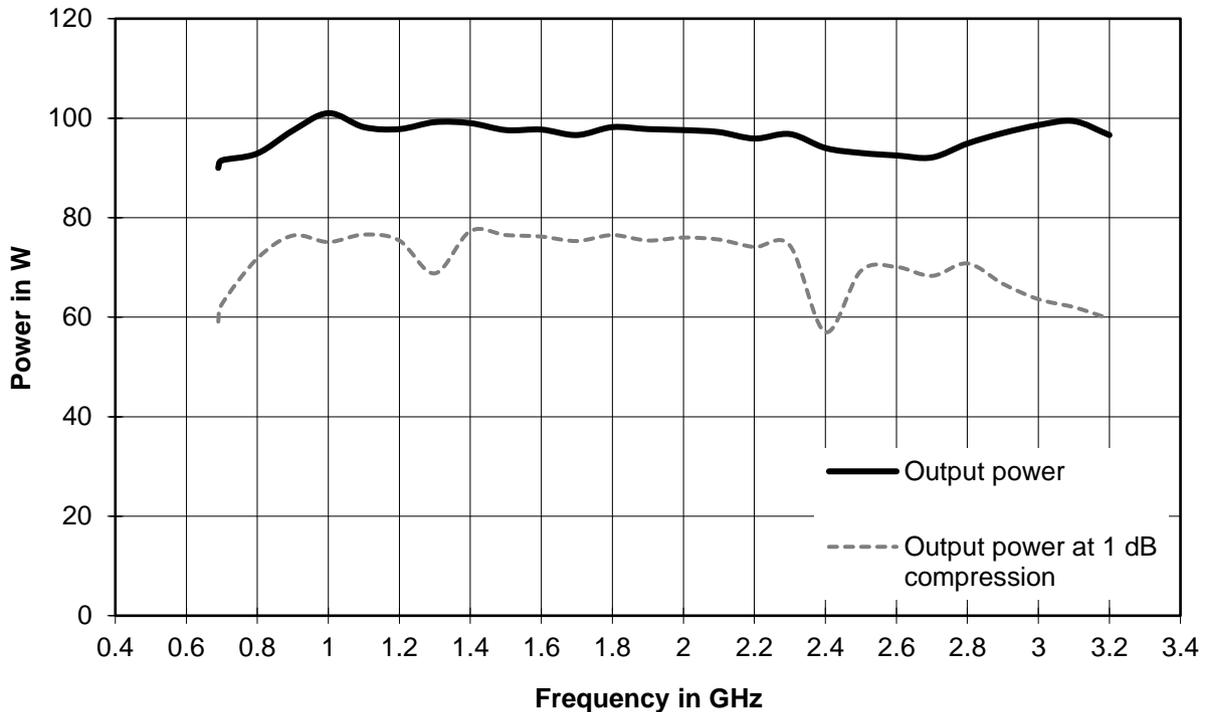

RF specifications

| Main parameters | | |
|----------------------------------|--|-------------------------------------|
| Frequency range | | 0.69 GHz to 3.2 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 90 W (49.5 dBm) |
| Output power | output mode set to <i>High Power</i> | min. 90 W (49.5 dBm) |
| Output power at 1 dB compression | < 0.8 GHz | min. 53 W (47.2 dBm) |
| | ≥ 0.8 GHz < 2.2 GHz | min. 60 W (47.8 dBm) |
| | ≥ 2.2 GHz | min. 55 W (47.4 dBm) |
| Nominal power gain | at 3000 MHz | nom. 52.9 dB |
| Gain flatness | | ± 2 dB |
| Harmonics | at 60 W, class A, < 1.8 GHz | < -17 dBc |
| | at 60 W, class A, ≥ 1.8 GHz | < -20 dBc |
| Spurious | at 60 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 56 dB | nom. < 12.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 46 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 13 kg (29 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|---|--|
| Nominal operating voltage range | | 100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 5.8 A |
| | at 230 V | 2.8 A |
| Rated power | RF _{cw} = 90 W (RMS), VSWR = 1 | 635 VA |

Power class 160 W

Frequency response at high power (high power mode)

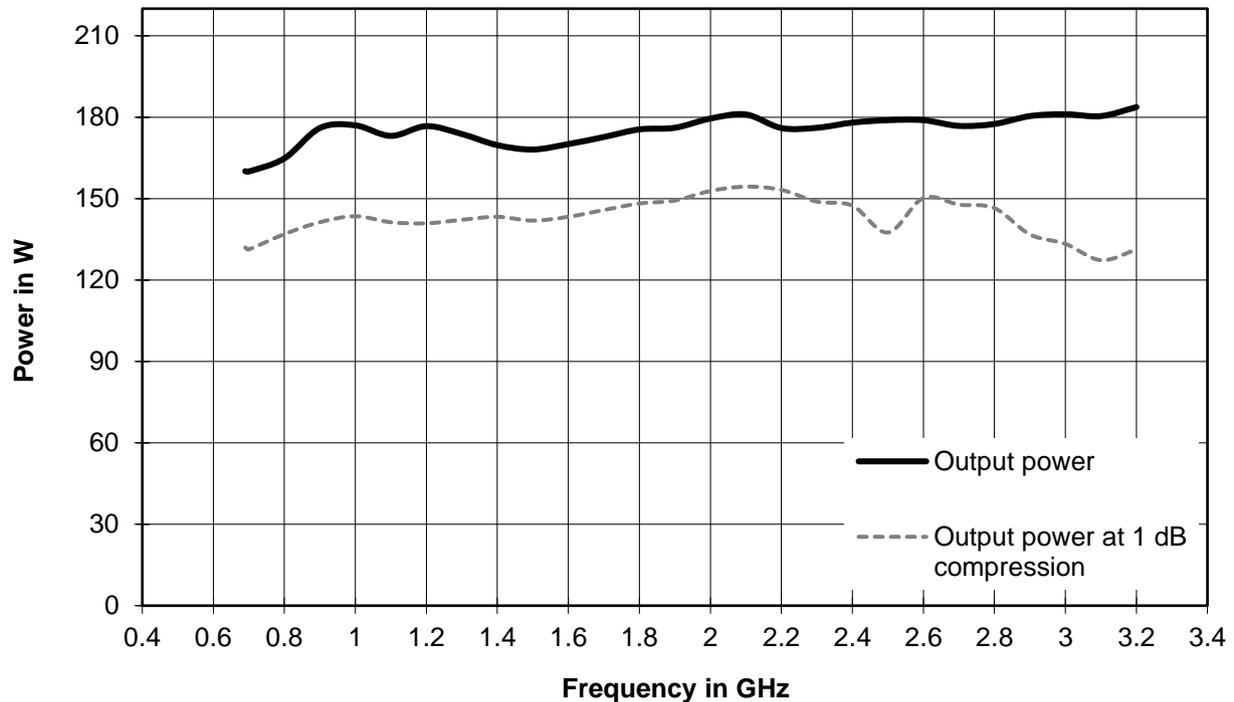

RF specifications

| Main parameters | | |
|----------------------------------|---|-------------------------------------|
| Frequency range | | 0.69 GHz to 3.2 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 160 W (52.0 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 1.1 GHz | min. 150 W (51.8 dBm) |
| | \geq 1.1 GHz < 2.0 GHz | min. 160 W (52.0 dBm) |
| | \geq 2.0 GHz | min. 150 W (51.8 dBm) |
| Output power at 1 dB compression | | min. 110 W (50.4 dBm) |
| Nominal power gain | at 3000 MHz | nom. 55.4 dB |
| Gain flatness | | ± 2.7 dB |
| Harmonics | at 110 W, class A, < 1.8 GHz | < -17 dBc |
| | at 110 W, class A, \geq 1.8 GHz | < -20 dBc |
| Spurious | at 110 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 67 dB | nom. < 12.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 46 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 17 kg (37 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|--|--|
| Nominal operating voltage range | | 100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 11.6 A |
| | at 230 V | 5.6 A |
| Rated power | RF _{cw} = 160 W (RMS), VSWR = 1 | 1.27 kVA |

Power class 300 W

Frequency response at high power (high power mode)

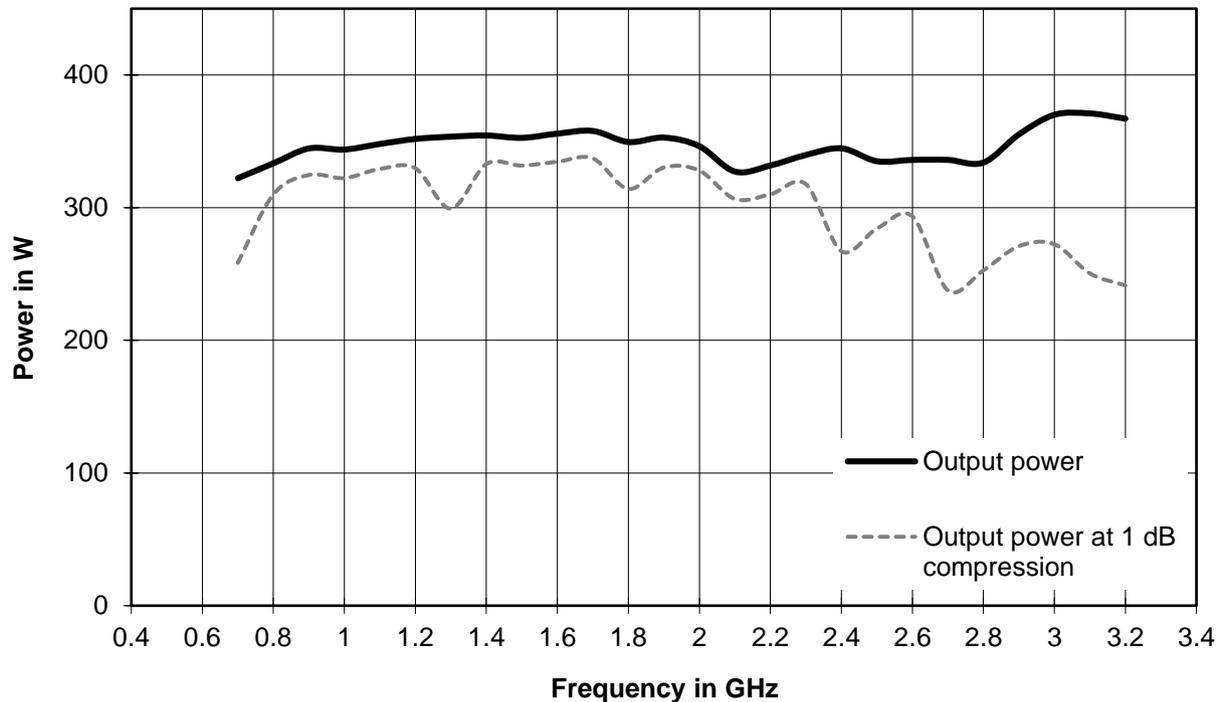

RF specifications

| Main parameters | | |
|----------------------------------|---|-------------------------------------|
| Frequency range | | 0.69 GHz to 3.2 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 300 W (54.7 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 1.1 GHz | min. 250 W (54.0 dBm) |
| | ≥ 1.1 GHz < 2.0 GHz | min. 300 W (54.7 dBm) |
| | ≥ 2.0 GHz < 2.8 GHz | min. 250 W (54.0 dBm) |
| | ≥ 2.8 GHz | min. 300 W (54.7 dBm) |
| Output power at 1 dB compression | | min. 200 W (53.0 dBm) |
| Nominal power gain | at 3000 MHz | nom. 58.1 dB |
| Gain flatness | | ± 2.7 dB |
| Harmonics | at 200 W, class A, < 1.8 GHz | < -16 dBc |
| | at 200 W, class A, ≥ 1.8 GHz | < -20 dBc |
| Spurious | at 200 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 67 dB | nom. < 12.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 46 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | base unit | approx. 24 kg (53 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|--|---|
| Nominal operating voltage range | | 200 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| | optional | 380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % |
| | | 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 20.0 A |
| | at 230 V | 9.6 A |
| Rated power | RF _{cw} = 300 W (RMS), VSWR = 1 | 2.2 kVA |

Power class 600 W

Frequency response at high power (high power mode)

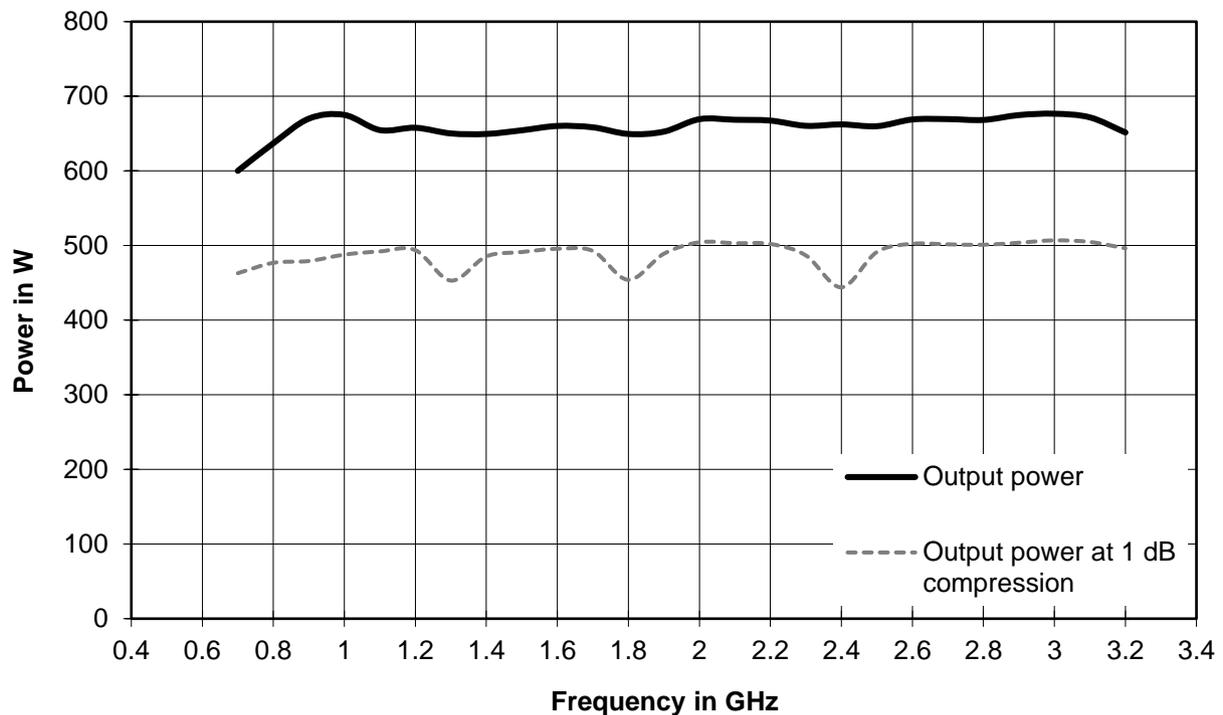

RF specifications

| Main parameters | | |
|----------------------------------|---|-------------------------------------|
| Frequency range | | 0.69 GHz to 3.2 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 600 W (57.7 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 1.1 GHz | min. 500 W (57.0 dBm) |
| | ≥ 1.1 GHz < 2.0 GHz | min. 600 W (57.7 dBm) |
| | ≥ 2.0 GHz | min. 500 W (57.0 dBm) |
| Output power at 1 dB compression | | min. 400 W (56.0 dBm) |
| Nominal power gain | at 3000 MHz | nom. 61.1 dB |
| Gain flatness | | ±2.7 dB |
| Harmonics | at 400 W, class A, < 1.8 GHz | < -17 dBc |
| | at 400 W, class A, ≥ 1.8 GHz | < -20 dBc |
| Spurious | at 400 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 78 dB | nom. < 12.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 54 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|------------|---|
| Dimensions | rack setup | 19" rack, 12 HU, depth 800 mm (31.5 in) |
| Weight | | approx. 95 kg (209 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|---------------------------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | $\frac{7}{16}$ DIN female |
| | or rear panel | $\frac{7}{16}$ DIN female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|--|---|
| Nominal operating voltage range | | 200 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| | optional | 380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % |
| | | 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 230 V per phase | 9.8 A/9.8 A/0.1 A |
| Rated power | RF _{cw} = 600 W (RMS), VSWR = 1 | 4.5 kVA |

Power class 1200 W

Frequency response at high power (high power mode)

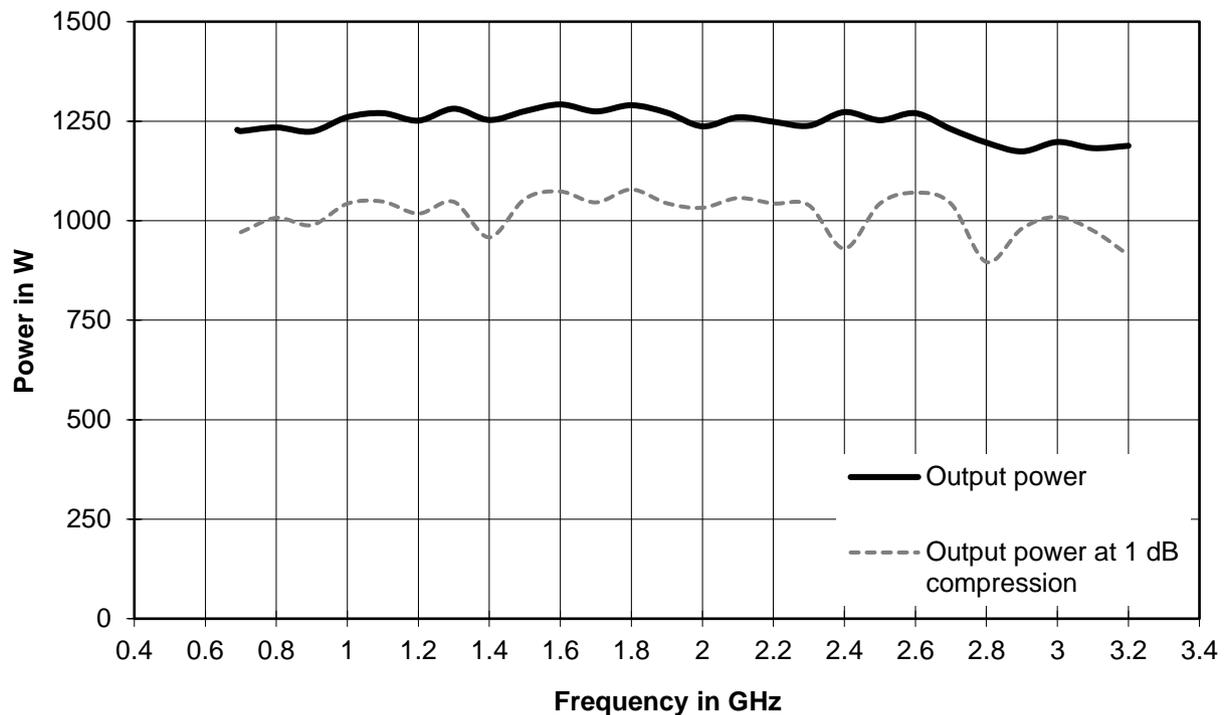

RF specifications

| Main parameters | | |
|----------------------------------|---|-------------------------------------|
| Frequency range | | 0.69 GHz to 3.2 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 1200 W (60.7 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 1.1 GHz | 1000 W (60.0 dBm) |
| | \geq 1.1 GHz < 2.0 GHz | 1200 W (60.7 dBm) |
| | \geq 2.0 GHz | 1000 W (60.0 dBm) |
| Output power at 1 dB compression | 0.69 GHz to 3.0 GHz | min. 830 W (59.2 dBm) |
| | 3.0 GHz to 3.2 GHz | min. 700 W (58.5 dBm) |
| Nominal power gain | at 3000 MHz | nom. 63.4 dB |
| Gain flatness | | \pm 3.8 dB |
| Harmonics | at 800 W, class A, < 1.8 GHz | < -17 dBc |
| | at 800 W, class A, \geq 1.8 GHz | < -20 dBc |
| Spurious | at 800 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 78 dB | nom. < 17.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 59 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|------------|---|
| Dimensions | rack setup | 19" rack, 20 HU, depth 800 mm (31.5 in) |
| Weight | | approx. 230 kg (507 lb) |

| RF and sample connectors | | |
|---------------------------------|----------------------------------|------------------------------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | rear panel | 1 $\frac{5}{8}$ " EIA female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |


Electrical specifications

| AC supply voltage | | |
|---------------------------------|---|---|
| Nominal operating voltage range | | 380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % |
| | optional | 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 230 V per phase | 19.4 A/9.7 A/9.7 A |
| Rated power | RF _{cw} = 1200 W (RMS), VSWR = 1 | 8.9 kVA |

Frequency band from 2.5 GHz to 6.0 GHz

Power class 22 W

Frequency response at high power (high power mode)

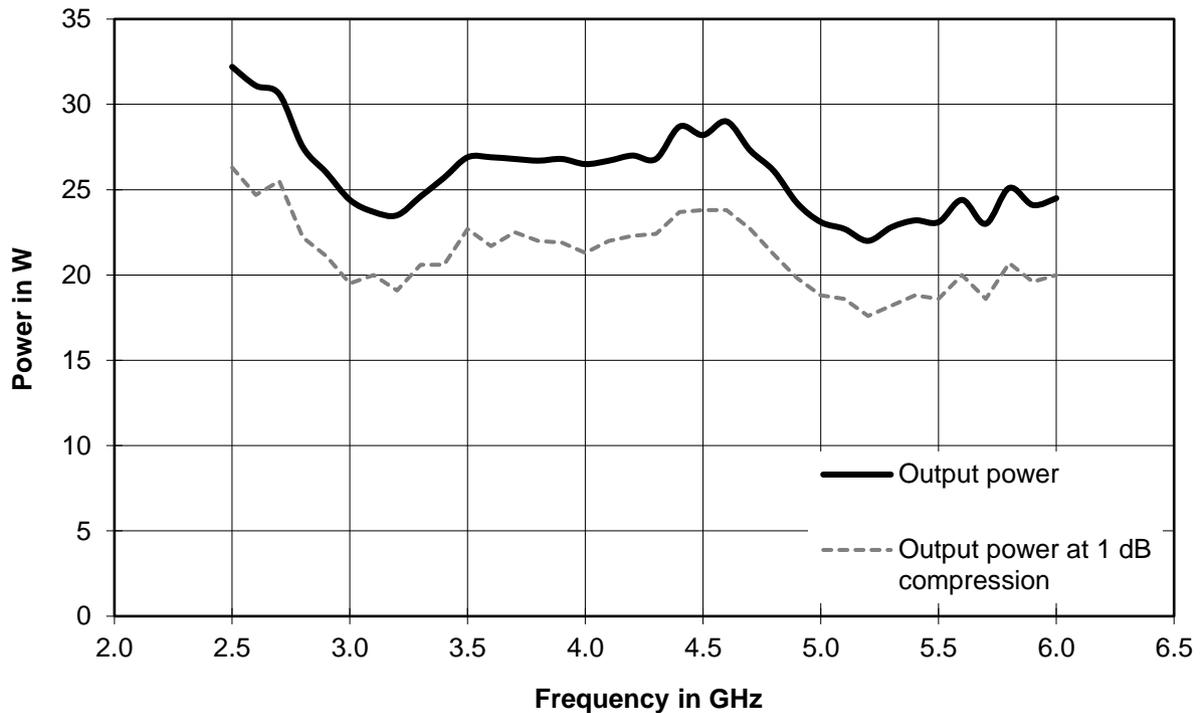

RF specifications

| Main parameters | | |
|----------------------------------|--|------------------------------------|
| Frequency range | | 2.5 GHz to 6.0 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 22 W (43.4 dBm) |
| Output power | output mode set to <i>High Power</i> | min. 22 W (43.4 dBm) |
| Output power at 1 dB compression | | min. 15 W (41.8 dBm) |
| Nominal power gain | at 3000 MHz | nom. 46.8 dB |
| Gain flatness | | ± 2.0 dB |
| Harmonics | at 15 W, class A | < -23 dBc |
| Spurious | at 15 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 55 dB | nom. < 11.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2.5:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 51 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 11 kg (24 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|---|--|
| Nominal operating voltage range | | 100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 5.1 A |
| | at 230 V | 2.5 A |
| Rated power | RF _{cw} = 22 W (RMS), VSWR = 1 | 555 VA |

Power class 45 W

Frequency response at high power (high power mode)

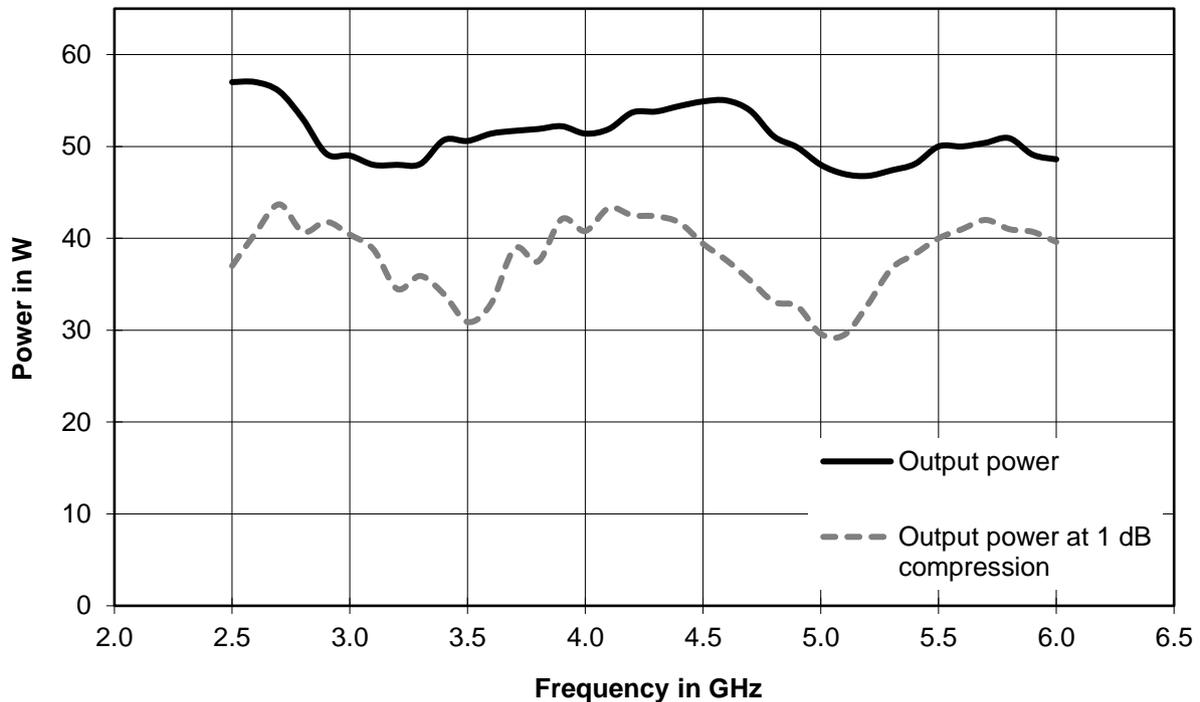

RF specifications

| Main parameters | | |
|----------------------------------|--|------------------------------------|
| Frequency range | | 2.5 GHz to 6.0 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 45 W (46.5 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 4.5 GHz | min. 45 W (46.5 dBm) |
| Output power at 1 dB compression | < 5.5 GHz | min. 30 W (44.8 dBm) |
| | \geq 5.5 GHz | min. 25 W (44.0 dBm) |
| Nominal power gain | at 3000 MHz | nom. 49.9 dB |
| Gain flatness | | ± 2.0 dB |
| Harmonics | at 30 W, class A | < -20 dBc |
| Spurious | at 30 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 55 dB | nom. < 11.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2.5:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 51 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 11 kg (24 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|---|--|
| Nominal operating voltage range | | 100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 5.1 A |
| | at 230 V | 2.5 A |
| Rated power | RF _{cw} = 45 W (RMS), VSWR = 1 | 555 VA |

Power class 90 W

Frequency response at high power (high power mode)

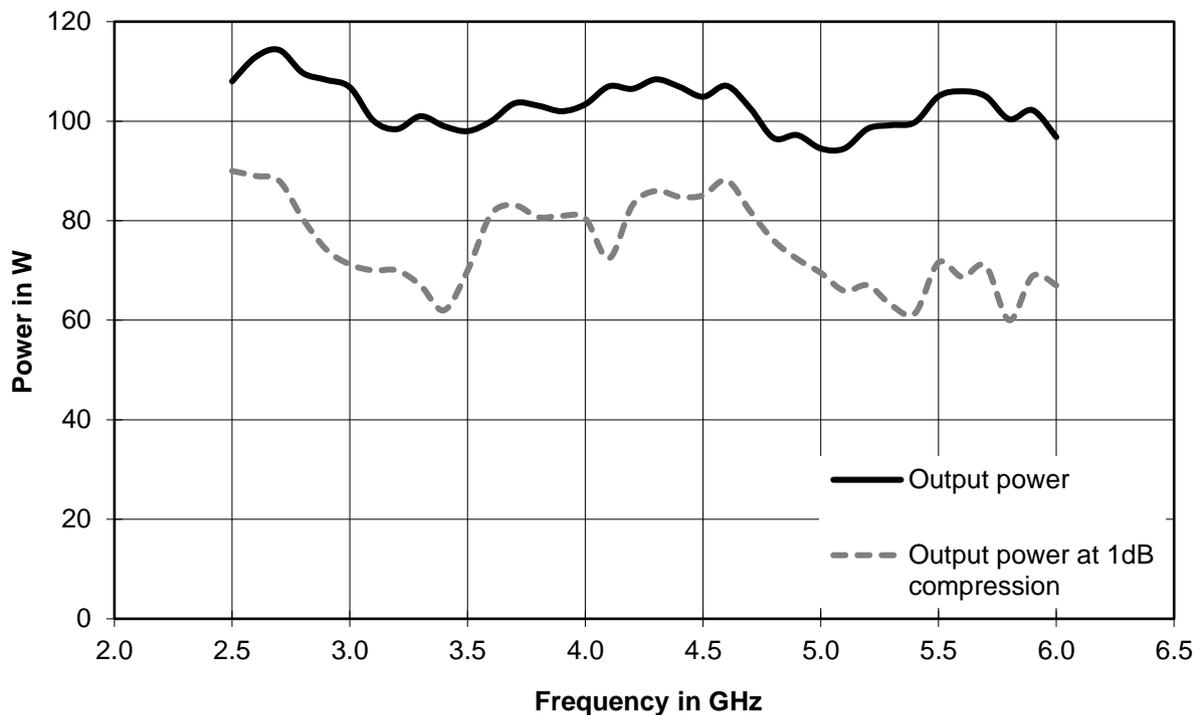

RF specifications

| Main parameters | | |
|----------------------------------|--|------------------------------------|
| Frequency range | | 2.5 GHz to 6.0 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 90 W (49.5 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 4.5 GHz | min. 80 W (49.0 dBm) |
| | \geq 4.5 GHz | min. 75 W (48.8 dBm) |
| Output power at 1 dB compression | < 3.2 GHz | min. 60 W (47.8 dBm) |
| | \geq 3.2 GHz | min. 55 W (47.4 dBm) |
| Nominal power gain | at 3000 MHz | nom. 52.9 dB |
| Gain flatness | | ± 3.0 dB |
| Harmonics | at 60 W, class A | < -20 dBc |
| Spurious | at 60 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 68 dB | nom. < 11.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2.5:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 51 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 15 kg (33 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|---|--|
| Nominal operating voltage range | | 100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 10.0 A |
| | at 230 V | 4.8 A |
| Rated power | RF _{cw} = 90 W (RMS), VSWR = 1 | 1.1 kVA |

Power class 150 W

Frequency response at high power (high power mode)

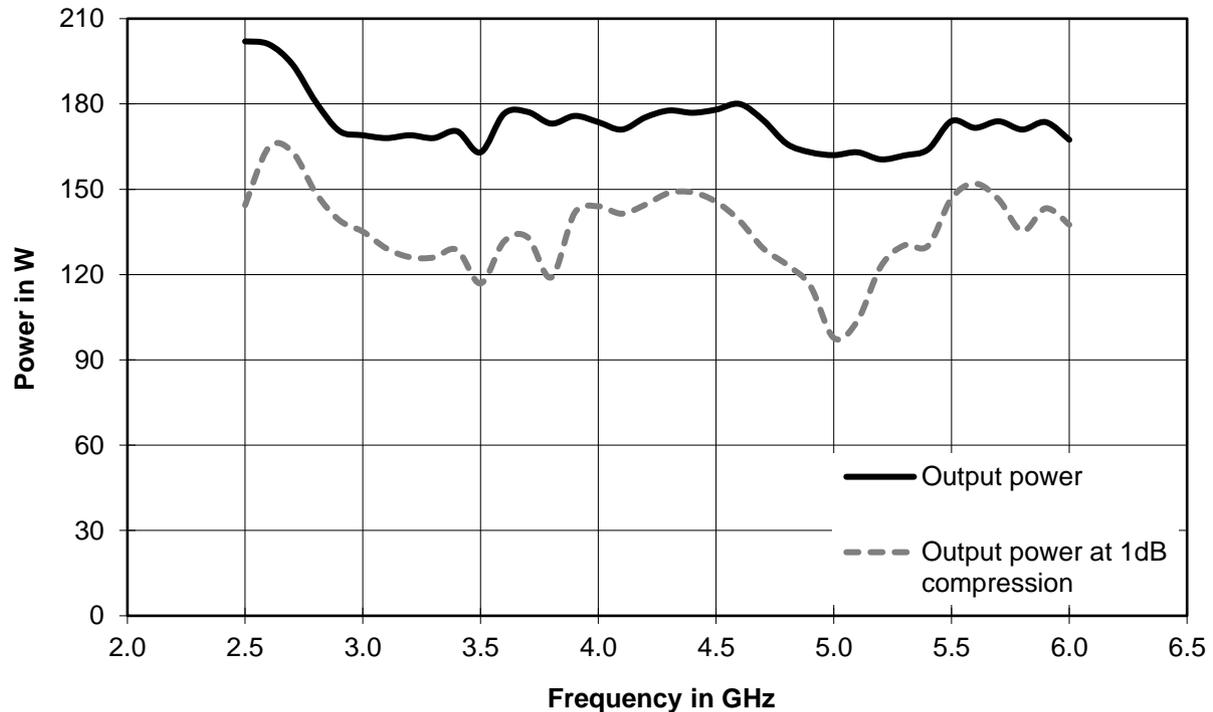

RF specifications

| Main parameters | | |
|----------------------------------|---|------------------------------------|
| Frequency range | | 2.5 GHz to 6.0 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 150 W (51.7 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 4.5 GHz | min. 150 W (51.7 dBm) |
| Output power at 1 dB compression | \geq 4.5 GHz | min. 125 W (51.0 dBm) |
| | < 4.5 GHz | min. 100 W (50.0 dBm) |
| | \geq 4.5 GHz | min. 90 W (49.6 dBm) |
| | Nominal power gain | at 3000 MHz |
| Gain flatness | | \pm 3.0 dB |
| Harmonics | at 100 W, class A | < -20 dBc |
| Spurious | at 100 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 68 dB | nom. < 11.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2.5:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 51 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 17 kg (37 lb) |


| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|--|--|
| Nominal operating voltage range | | 100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 14.6 A |
| | at 230 V | 7.0 A |
| Rated power | RF _{cw} = 150 W (RMS), VSWR = 1 | 1.6 kVA |

Power class 280 W

Frequency response at high power (high power mode)

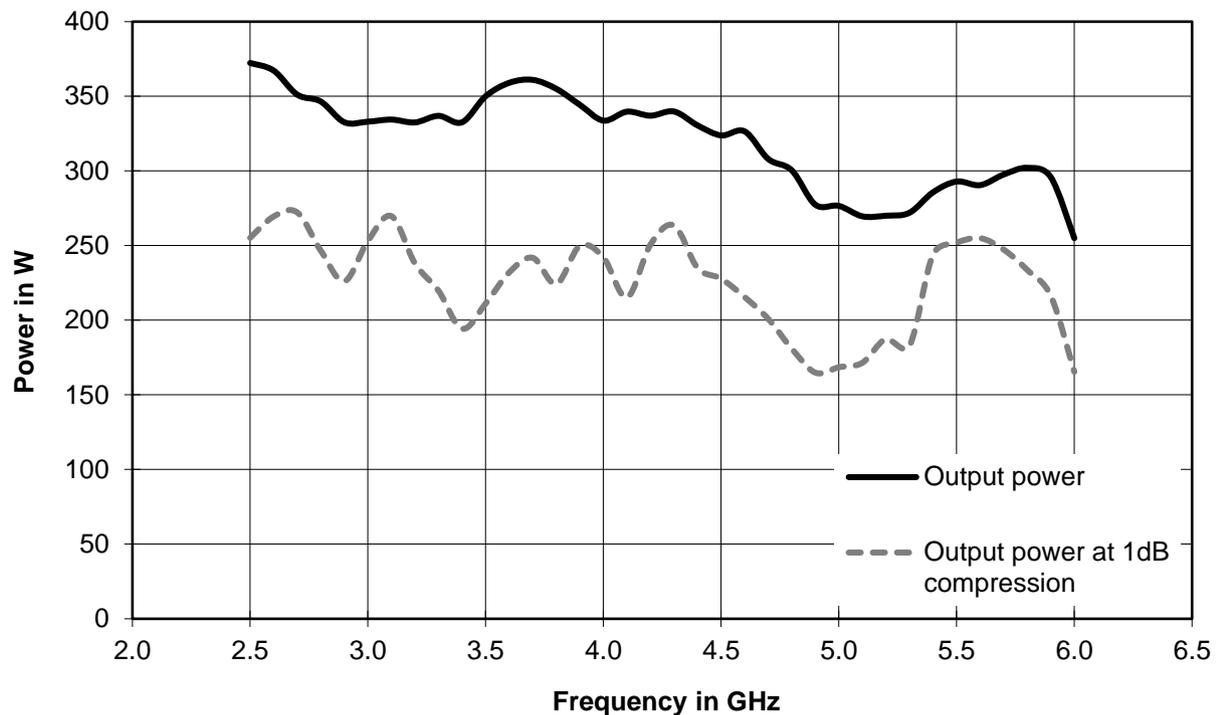

RF specifications

| Main parameters | | |
|----------------------------------|---|------------------------------------|
| Frequency range | | 2.5 GHz to 6.0 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 280 W (54.7 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 4.5 GHz | min. 280 W (54.5 dBm) |
| | \geq 4.5 GHz | min. 230 W (53.6 dBm) |
| Output power at 1 dB compression | < 4.5 GHz | min. 200 W (53.0 dBm) |
| | \geq 4.5 GHz | min. 180 W (52.6 dBm) |
| Nominal power gain | at 3000 MHz | nom. 58.1 dB |
| Gain flatness | | ± 3.0 dB |
| Harmonics | at 200 W, class A | < -20 dBc |
| Spurious | at 200 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 68 dB | nom. < 11.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2.5:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 51 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications


| System size | | |
|--------------------|--|---|
| Dimensions | W x H x D, incl. fans, handles and stand | 430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in) |
| | for rackmounting | 1/1 19", 4 HU |
| Weight | | approx. 24 kg (53 lb) |

| RF and sample connectors | | |
|---------------------------------|----------------------------------|----------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | N female |
| | or rear panel | N female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|--|--|
| Nominal operating voltage range | | 200 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| | optional | 380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 110 V | 26.4 A |
| | at 230 V | 12.7 A |
| Rated power | RF _{cw} = 280 W (RMS), VSWR = 1 | 2.9 kVA |

Power class 550 W

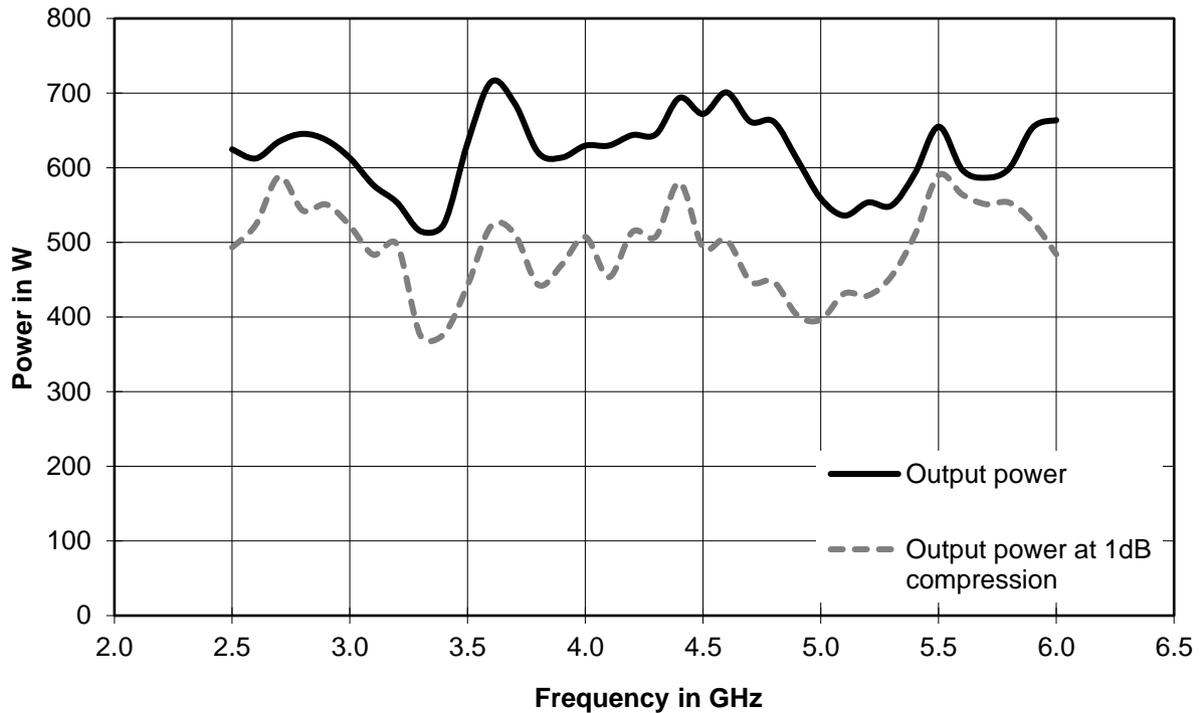

RF specifications

| Main parameters | | |
|----------------------------------|---|------------------------------------|
| Frequency range | | 2.5 GHz to 6.0 GHz instantaneously |
| Nominal output load | | 50 Ω |
| Nominal output power | | 550 W (57.4 dBm) |
| Output power | output mode set to <i>High Power</i> | |
| | < 2.8 GHz | min. 550 W (57.7 dBm) |
| | ≥ 2.8 GHz < 3.5 GHz | min. 480 W (56.8 dBm) |
| | ≥ 3.5 GHz < 4.8 GHz | min. 550 W (57.7 dBm) |
| Output power at 1 dB compression | ≥ 4.8 GHz | min. 480 W (56.8 dBm) |
| | < 3.1 GHz | min. 400 W (56.0 dBm) |
| Nominal power gain | ≥ 3.1 GHz | min. 350 W (55.5 dBm) |
| | at 3000 MHz | nom. 60.8 dB |
| Gain flatness | | ± 4.0 dB |
| Harmonics | at 400 W, class A | < -20 dBc |
| Spurious | at 400 W, class A, carrier offset > 100 kHz | nom. -80 dBc, max. -70 dBc |
| Noise figure | at maximum gain of nom. 78 dB | nom. < 11.0 dB |

| Adjustable parameters | | |
|---------------------------|--|--|
| Gain adjustment | | > 15 dB |
| Bias adjustment | | continuous adjustment between class A and class AB |
| Load tolerance adjustment | | continuous adjustment between VSWR 2:1 and 6:1 |

| Input | | |
|--------------------------------------|----------------|-------------|
| Nominal input impedance | | 50 Ω |
| Input level for nominal output power | | -3.4 dBm |
| Input VSWR | at 50 Ω | max. 2.5:1 |
| Maximum input level | RF | +15 dBm |
| | DC | 0 V |

| Output | | |
|----------------------------------|------------------------------|---|
| Nominal output impedance | | 50 Ω |
| Nominal forward output power | at VSWR < set load tolerance | continuous, without foldback |
| | at VSWR > set load tolerance | continuous, with gradual foldback depending on load impedance |
| Output mismatch protection, VSWR | | 100 %, without damage |

| RF sample and detected sample signals | | |
|--|---|---|
| RF sample signal coupling factor | RF forward and reflected sample ports, optional | approx. 46 dB, see test report for details |
| Detected sample signal level | detected forward and reflected sample ports, optional | up to 3.0 V DC, see test report for details |

Mechanical specifications

| System size | | |
|--------------------|------------|---|
| Dimensions | rack setup | 19" rack, 12 HU, depth 800 mm (31.5 in) |
| Weight | | approx. 95 kg (209 lb) |

| RF and sample connectors | | |
|---------------------------------|----------------------------------|-----------------|
| RF input port | either front panel | N female |
| | or rear panel | N female |
| RF output port | either front panel | 7/16 DIN female |
| | or rear panel | 7/16 DIN female |
| RF sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |
| Detected sample port | forward output power, optional | N female |
| | reflected output power, optional | N female |

Electrical specifications

| AC supply voltage | | |
|---------------------------------|--|--|
| Nominal operating voltage range | | 200 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 % |
| | optional | 380 to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 % |
| Rated current (high power mode) | at 230 V per phase | 10.2 A/10.2 A/0.1 A |
| Rated power | RF _{cw} = 550 W (RMS), VSWR = 1 | 4.7 kVA |

General data

Modulation specifications

| | | |
|-----------------------|--|------------------------|
| Modulation capability | | AM, FM, ϕ M or PM |
|-----------------------|--|------------------------|

Cooling specifications

| | | |
|-------------|--|---|
| Air cooling | | forced air, built-in fans, air entry at front, air exit at rear |
|-------------|--|---|

Control specifications

| | | |
|-----------------------|--|--|
| Remote control | | |
| Ethernet | | RJ-45, 10/100 Mbit/s, auto-negotiation, half/full duplex |

| | | |
|------------------------|-----------------------|---|
| Local HMI | | |
| Local display | | 200 × 48 pixel, monochrome |
| Manual controls | resting pushbutton | mains switch |
| | operation pushbuttons | <ul style="list-style-type: none"> • system standby/on • RF standby/operate • local/remote |
| | menu pushbuttons | <ul style="list-style-type: none"> • arrow up, down, left, right • ok • back |
| LED status information | | <ul style="list-style-type: none"> • system standby/on • RF standby/operate • mute ready • interlock • error • local/remote |

| | | |
|----------------|--------------|--|
| Web GUI | | |
| Remote web GUI | via Ethernet | RJ-45, 10/100 Mbit/s, auto-negotiation, half/full duplex |

Environmental specifications

| | | |
|---|--|--|
| Temperature loading | operating temperature range | 0 °C to +40 °C |
| | storage temperature range | -20 °C to +70 °C |
| Damp heat | | max. +40 °C at 95 % rel. humidity, without condensation |
| Altitude | operating altitude | up to 2000 m |
| | storage altitude | up to 4600 m |
| Mechanical resistance test values of desktop models | vibration, sinusoidal | 5 Hz to 55 Hz, displacement 0.15 mm, > 55 Hz to 150 Hz, acceleration 0.5 g, in line with EN 60068-2-6 |
| | vibration, random | effective acceleration ≤ 1.2 g, 10 Hz to 300 Hz, acceleration density 0.003 g ² /Hz, in line with EN 60068-2-64 |
| | shock | 18 sawtooth shocks, each 40 g in 11 ms, in line with EN 60068-2-27, MIL-STD-810E method no. 516.4, procedure I |
| Calibration interval | | no calibration needed |
| Electromagnetic compatibility | immunity | in line with EN 61326-1, public and industrial area |
| | electromagnetic fields | ≤ 10 V/m, in line with IEC 61000-4-3 |
| | surge test: line to ground | ≤ 2 kV, in line with IEC 61000-4-5 |
| | surge test: interlock to ground | ≤ 2 kV, in line with IEC 61000-4-5 |
| | surge test: Ethernet to ground | ≤ 2 kV, in line with IEC 61000-4-5 |
| | surge test: RF output to ground | ≤ 2 kV, in line with IEC 61000-4-5 |
| | surge test: line to line | ≤ 1 kV, in line with IEC 61000-4-5 |
| Electromagnetic emissions | bursts | ≤ 2 kV, in line with IEC 61000-4-4 |
| | overall | in line with EN 55011 (CISPR 11), industrial area, ISM group 1 or 2 and FCC 047 CFR part 18, non-consumer equipment |
| | conducted emissions | in line with EN 55011, class A |
| | radiated emissions from 30 MHz to 18 GHz | equipment for use in shielded areas only, normative limits of EN 55011 group 1/2 class A or FCC 047 CFR part 18 exceeded up to 40 dB and by R&S®BBA130-D400, R&S®BBA130-E200 and R&S®BBA130-BCxx up to 50 dB |
| Electromagnetic field strength | all-around the enclosure | in line with the limits of rec 1999/519/EC, 26. BImSchV, BGV B11 exposure limit 2 (protection of health and safety of workers, consumers and the general public) |
| Electrical safety | | in line with EN 61010-1:2010, IEC 61010-1:2011 + Corr. 2011 (3rd ed.), CAN/CSA-C22.2 no. 61010-1-12, UL 61010-1 3rd edition, May 11, 2012 |

Protection

| | | |
|---------------------------------------|----------|--|
| RF | | |
| Load VSWR | | unlimited |
| Interlock | | 1 device interlock, 1 configurable interlock |
| Input protection against bias voltage | optional | DC block level ≤ 50 V DC |

| | | |
|---------------------------------|--|---|
| Power supply | | |
| Transient voltage compatibility | | category II, in line with IEC 60364-4-443 |
| Short-circuit breaking capacity | | automatic all-pole 20 A circuit breaker |

| | | |
|----------------------|--|------------------------------|
| Miscellaneous | | |
| Thermal overload | | shutdown at thermal overload |

General RF specifications

The specified nominal output power is valid for all amplifiers in a 4 HU chassis with RF output at rear and for single band rack models at the RF connection panel.

For single and dual band amplifiers in a 4 HU chassis with RF output at front cable insertion loss reduces the output power:

| | | |
|---|----------------|-----------|
| Cable insertion loss for single-band and dual-band power amplifiers in 4 HU chassis with RF output at front | 0 Hz to 1 GHz | ≤ 0.20 dB |
| | 1 GHz to 2 GHz | ≤ 0.30 dB |
| | 2 GHz to 3 GHz | ≤ 0.40 dB |
| | 3 GHz to 6 GHz | ≤ 0.50 dB |
| | 6 GHz to 8 GHz | ≤ 0.60 dB |

In case of rack integration, the loss due to cables and RF switches needs to be taken into account. The insertion loss of RF switches is specified under "Switching specifications" in this data sheet.

RF switching specifications – input and measurement

| | | |
|---|--------------------|-------------------------------|
| RF input switch, R&S®BBA-B110 option | | |
| Switch type | | 1:2 or 2:1, mechanical |
| RF input port | | N female |
| Frequency range | | 0 Hz to 8 GHz |
| Switching time | | < 10 ms |
| Life | | 10 000 000 cycles |
| Insertion loss | 0 Hz to 3 GHz | ≤ 0.20 dB, without cable loss |
| | 3 GHz to 8 GHz | ≤ 0.30 dB, without cable loss |
| | 8 GHz to 12.4 GHz | ≤ 0.40 dB, without cable loss |
| | 12.4 GHz to 18 GHz | ≤ 0.50 dB, without cable loss |
| | 18 GHz to 26.5 GHz | ≤ 0.70 dB, without cable loss |

| | | |
|---|--------------------|-------------------------------|
| RF input switch, R&S®BBA-B116 option | | |
| Switch type | | 1:6, mechanical |
| RF input port | | N female |
| Frequency range | | 0 Hz to 8 GHz |
| Switching time | | < 15 ms |
| Life | | 5 000 000 cycles |
| Insertion loss | 0 Hz to 3 GHz | ≤ 0.20 dB, without cable loss |
| | 3 GHz to 8 GHz | ≤ 0.30 dB, without cable loss |
| | 8 GHz to 12.4 GHz | ≤ 0.40 dB, without cable loss |
| | 12.4 GHz to 18 GHz | ≤ 0.50 dB, without cable loss |

| | | |
|--|------------------------|-------------------------------|
| RF sample port switch, dual port, R&S®BBA-B142 option | | |
| Switch type | | 2 × 2:1, mechanical |
| RF or detected sample port | forward output power | N female |
| | reflected output power | N female |
| Frequency range | | 0 Hz to 8 GHz |
| Switching time | | < 10 ms |
| Life | | 10 000 000 cycles |
| RF sample signal level | | max. 10 dBm |
| Insertion loss | 0 Hz to 3 GHz | ≤ 0.20 dB, without cable loss |
| | 3 GHz to 8 GHz | ≤ 0.30 dB, without cable loss |
| | 8 GHz to 12.4 GHz | ≤ 0.40 dB, without cable loss |
| | 12.4 GHz to 18 GHz | ≤ 0.50 dB, without cable loss |
| | 18 GHz to 26.5 GHz | ≤ 0.70 dB, without cable loss |

| RF sample port switch, dual port, R&S®BBA-B146 option | | |
|--|------------------------|-------------------------------|
| Switch type | | 2 × 6:1, mechanical |
| RF or detected sample port | forward output power | N female |
| | reflected output power | N female |
| Frequency range | | 0 Hz to 8 GHz |
| Switching time | | < 10 ms |
| Life | | 5 000 000 cycles |
| RF sample signal level | | max. 10 dBm |
| Insertion loss | 0 Hz to 3 GHz | ≤ 0.20 dB, without cable loss |
| | 3 GHz to 8 GHz | ≤ 0.30 dB, without cable loss |
| | 8 GHz to 12.4 GHz | ≤ 0.40 dB, without cable loss |
| | 12.4 GHz to 18 GHz | ≤ 0.50 dB, without cable loss |

RF switching specifications – output

| RF output switch, R&S®BBA-B120 option | | |
|--|-------------------|---|
| Switch type | | 2:1 or 1:2, mechanical |
| RF output port | | N female |
| Frequency range | | 0 Hz to 8 GHz |
| Switching time | | < 15 ms |
| Life | | 1 000 000 cycles |
| Average forward RF power | 0 Hz to 1 GHz | max. $700 \text{ W} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 1 GHz to 2 GHz | max. $500 \text{ W} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 2 GHz to 3 GHz | max. $400 \text{ W} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 3 GHz to 8 GHz | max. $250 \text{ W} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 8 GHz to 12.4 GHz | max. $200 \text{ W} \cdot 1/\sqrt{\text{VSWR}}$ |
| Insertion loss | 0 Hz to 1 GHz | ≤ 0.15 dB, without cable loss |
| | 1 GHz to 2 GHz | ≤ 0.20 dB, without cable loss |
| | 2 GHz to 3 GHz | ≤ 0.25 dB, without cable loss |
| | 3 GHz to 8 GHz | ≤ 0.35 dB, without cable loss |
| | 8 GHz to 12.4 GHz | ≤ 0.50 dB, without cable loss |

| RF output switch, R&S®BBA-B121 option | | |
|--|----------------|--|
| Switch type | | 2:2, mechanical |
| RF output port | | 7/16 female |
| Frequency range | | 0 Hz to 6 GHz |
| Switching time | | < 100 ms |
| Life | | ≥ 500 000 |
| Average forward RF power | 0 Hz to 1 GHz | max. $2.0 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 1 GHz to 2 GHz | max. $1.4 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 2 GHz to 3 GHz | max. $1.1 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 3 GHz to 4 GHz | max. $1.0 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 4 GHz to 5 GHz | max. $0.9 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 5 GHz to 6 GHz | max. $0.8 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| Insertion loss | 0 Hz to 2 GHz | ≤ 0.05 dB, without cable loss |
| | 2 GHz to 5 GHz | ≤ 0.10 dB, without cable loss |
| | 5 GHz to 6 GHz | ≤ 0.15 dB, without cable loss |

| RF output switch, R&S®BBA-B122 option | | |
|--|----------------------|--|
| Switch type | | 2:2, mechanical |
| RF output port | | $\frac{7}{8}$ " EIA |
| Frequency range | | 0 Hz to 3.5 GHz |
| Switching time | | < 120 ms |
| Life | | ≥ 250 000 |
| Average forward RF power | 0 Hz to 0.1 GHz | max. $8 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 0.1 GHz to 0.23 GHz | max. $5 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 0.23 GHz to 0.86 GHz | max. $2.5 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 0.86 GHz to 2 GHz | max. $1.8 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 2 GHz to 3 GHz | max. $1.4 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| | 3 GHz to 3.5 GHz | max. $1.3 \text{ kW} \cdot 1/\sqrt{\text{VSWR}}$ |
| Insertion loss | 0 Hz to 1 GHz | ≤ 0.03 dB, without cable loss |
| | 1 GHz to 2 GHz | ≤ 0.05 dB, without cable loss |
| | 2 GHz to 3.5 GHz | ≤ 0.20 dB, without cable loss |

| RF output switch, R&S®BBA-B123 option | | |
|--|----------------------|-------------------------------|
| Switch type | | 2:2, mechanical |
| RF output port | | 1 5/8" EIA |
| Frequency range | | 0 Hz to 2 GHz |
| Switching time | | < 120 ms |
| Life | | ≥ 250 000 |
| Average forward RF power | 0 Hz to 0.1 GHz | max. 19 kW • 1/√(VSWR) |
| | 0.1 GHz to 0.23 GHz | max. 12.7 kW • 1/√(VSWR) |
| | 0.23 GHz to 0.86 GHz | max. 6.6 kW • 1/√(VSWR) |
| | 0.86 GHz to 1.6 GHz | max. 4.8 kW • 1/√(VSWR) |
| | 1.6 GHz to 2 GHz | max. 4.3 kW • 1/√(VSWR) |
| Insertion loss | 0 Hz to 0.86 GHz | ≤ 0.05 dB, without cable loss |
| | 0.86 GHz to 2 GHz | ≤ 0.10 dB, without cable loss |

| RF output switch, R&S®BBA-B126 option | | |
|--|----------------|-------------------------------|
| Switch type | | 6:1, mechanical |
| RF output port | | N female |
| Frequency range | | 0 Hz to 8 GHz |
| Switching time | | < 15 ms |
| Life | | ≥ 2 000 000 cycles |
| Average forward RF power | 0 Hz to 1 GHz | max. 700 W • 1/√(VSWR) |
| | 1 GHz to 2 GHz | max. 500 W • 1/√(VSWR) |
| | 2 GHz to 3 GHz | max. 400 W • 1/√(VSWR) |
| | 3 GHz to 8 GHz | max. 250 W • 1/√(VSWR) |
| | | |
| Insertion loss | 0 Hz to 1 GHz | ≤ 0.15 dB, without cable loss |
| | 1 GHz to 2 GHz | ≤ 0.20 dB, without cable loss |
| | 2 GHz to 3 GHz | ≤ 0.25 dB, without cable loss |
| | 3 GHz to 8 GHz | ≤ 0.35 dB, without cable loss |

Fast amplifier mute specifications

| Fast amplifier mute, R&S®BBA-B130 option | | |
|---|---|--------------|
| External mute signal | | TTL |
| Mute on delay (amplifier switches to mute mode, RF turns off) | | nom. < 8 μs |
| Mute off delay (amplifier leaves mute mode, RF turns on) | models with frequency band from 9 kHz to 250 MHz, from 0.8 GHz to 3.0 GHz, from 2.5 GHz to 6.0 GHz | nom. < 4 μs |
| | models with frequency band from 80 MHz to 1.0 GHz | nom. < 15 μs |

Ordering information

R&S®BBA130 single-band power amplifiers

Frequency band from 80 MHz to 1.0 GHz

| Designation | Type | Configuration No. |
|---------------------------------------|------------|-------------------|
| 100 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC100 |
| 180 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC180 |
| 240 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC240 |
| 380 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC380 |
| 750 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC750 |
| 1500 W, air-cooled, 12 HU rack model | R&S®BBA130 | BBA130-BC1500 |
| 1800 W, air-cooled, 20 HU rack model | R&S®BBA130 | BBA130-BC1800 |
| 2100 W, air-cooled, 20 HU rack model | R&S®BBA130 | BBA130-BC2100 |
| 2700 W, air-cooled, 20 HU rack model | R&S®BBA130 | BBA130-BC2700 |
| 4200 W, air-cooled, 35 HU rack model | R&S®BBA130 | BBA130-BC4200 |

Frequency band from 690 MHz to 3.2 GHz

| Designation | Type | Configuration No. |
|---------------------------------------|------------|-------------------|
| 45 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D45 |
| 90 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D90 |
| 160 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D160 |
| 300 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D300 |
| 600 W, air-cooled, 12 HU rack model | R&S®BBA130 | BBA130-D600 |
| 1200 W, air-cooled, 20 HU rack model | R&S®BBA130 | BBA130-D1200 |

Frequency band from 2.5 GHz to 6.0 GHz

| Designation | Type | Configuration No. |
|---------------------------------------|------------|-------------------|
| 22 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-E22 |
| 45 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-E45 |
| 90 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-E90 |
| 150 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-E150 |
| 280 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-E280 |
| 550 W, air-cooled, 12 HU rack model | R&S®BBA130 | BBA130-E550 |

Accessories supplied: power cord, user manual on CD.

R&S®BBA130 twin-band power amplifiers

Frequency bands 2 × from 80 MHz to 1 GHz

| Designation | Type | Configuration No. |
|---|------------|-------------------|
| 100 W/100 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC100BC100 |
| 180 W/180 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC180BC180 |
| 240 W/240 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC240BC240 |
| 350 W/350 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC350BC350 |

Frequency bands 2 × from 690 MHz to 3.2 GHz

| Designation | Type | Configuration No. |
|---|------------|-------------------|
| 45 W/45 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D45D45 |
| 90 W/90 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D90D90 |
| 160 W/160 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D160D160 |

Frequency bands 2 × from 2.5 GHz to 6 GHz

| Designation | Type | Configuration No. |
|---|------------|-------------------|
| 22 W/22 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-E22E22 |
| 45 W/45 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-E45E45 |
| 90 W/90 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-E90E90 |
| 150 W/150 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-E150E150 |

Accessories supplied: power cord, user manual on CD.

R&S®BBA130 dual-band power amplifiers

Frequency bands from 80 MHz to 1 GHz and 690 MHz to 3.2 GHz

| Designation | Type | Configuration No. |
|---|------------|-------------------|
| 180 W/45 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC180D45 |
| 180 W/90 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC180D90 |
| 180 W/160 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC180D160 |
| 240 W/45 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC240D45 |
| 240 W/90 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC240D90 |
| 240 W/160 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC240D160 |
| 350 W/45 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC350D45 |
| 350 W/90 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC350D90 |
| 350 W/160 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-BC350D160 |

Frequency bands from 690 MHz to 3.2 GHz and 2.5 GHz to 6.0 GHz

| Designation | Type | Configuration No. |
|---|------------|-------------------|
| 45 W/22 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D45E22 |
| 45 W/45 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D45E45 |
| 90 W/22 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D90E22 |
| 90 W/45 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D90E45 |
| 90 W/90 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D90E90 |
| 160 W/45 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D160E45 |
| 160 W/90 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D160E90 |
| 160 W/150 W, air-cooled, 4 HU desktop model | R&S®BBA130 | BBA130-D160E150 |

Accessories supplied: power cord, user manual on CD.

Options

| Designation | Type | Order No. |
|--|--------------|---------------------------|
| GPIO Remote Control (external add-on) | R&S®BBA-B101 | 5355.8250.02 |
| GPIO Remote Control, for racks up to 30 HU | R&S®BBA-B101 | 5355.8250.03 |
| GPIO Remote Control, for racks higher than 30 HU | R&S®BBA-B101 | 5355.8250.04 |
| Optical Ethernet Remote Control | R&S®BBA-B105 | 5355.8266.03 |
| RF Input Switch (1:2 or 2:1, N) | R&S®BBA-B110 | 5355.8866.02 ¹ |
| RF Input Switch (1:6, N) | R&S®BBA-B116 | 5355.8950.02 |
| RF Output Switch (2:1 or 1:2, N) | R&S®BBA-B120 | 5355.8795.02 ¹ |
| RF Output Switch (2:2, $\frac{7}{16}$) | R&S®BBA-B121 | 5355.8895.02 ¹ |
| RF Output Switch (2:2, $\frac{7}{8}$ " EIA) | R&S®BBA-B122 | 5355.8989.02 |
| RF Output Switch (2:2, 1 $\frac{5}{8}$ " EIA) | R&S®BBA-B123 | 5355.8943.02 |
| RF Output Switch (6:1, N) | R&S®BBA-B126 | 5355.8995.02 |
| Fast Amplifier Mute | R&S®BBA-B130 | 5355.8114.02 |
| DC Block Input Protection (N) | R&S®BBA-B132 | 5353.9236.03 |
| RF Forward/RF Reflected Sample Ports (N front) | R&S®BBA-B140 | 5355.8837.02 |
| RF Forward/RF Reflected Sample Ports (N rear) | R&S®BBA-B140 | 5355.8837.03 |
| Detected Forward/Detected Reflected Sample Ports (N front) | R&S®BBA-B141 | 5355.8850.02 |
| Detected Forward/Detected Reflected Sample Ports (N rear) | R&S®BBA-B141 | 5355.8850.03 |
| Sample Port Switch (2 × 2:1, N) | R&S®BBA-B142 | 5355.8872.02 ¹ |
| Sample Port Switch (2 × 6:1, N) | R&S®BBA-B146 | 5355.8972.02 |
| Transparent I/O | R&S®BBA-B160 | 5355.8889.02 |

¹ Variant of order number depends on system configuration.

Service

| Designation | Type | Order No. |
|--|--------------|------------|
| Upgrade Frequency Band/RF Output Power | R&S®BBA-UPGR | on request |

| Service options | | |
|--|----------------|--------------------|
| Service Level Agreement BASIC 1, 2 or 3 years | R&S®SB1/2/3AMP | 5354.6560.02/03/04 |
| Service Level Agreement ADVANCED 1, 2 or 3 years depending on regional availability | R&S®SA1/2/3AMP | 5354.6560.07/08/09 |
| Service Level Agreement PREMIUM 1, 2 or 3 years depending on regional availability | R&S®SP1/2/3AMP | 5354.6560.12/13/14 |
| Regular product maintenance 1 to 6 years | R&S®SV1AMP | 5354.6560.22-28 |

Accessories

| Designation | Type | Order No. |
|--|---------------|--------------|
| Rackmounting Brackets (pair) | R&S®ZR1-RA02 | 5355.8208.00 |
| Mounting Rails, for R&S®BBA130 with transport lock (pair) | R&S®ZR1-SLR03 | 5355.8220.02 |
| Mounting Rails, for R&S®BBA130 without transport lock (pair) | R&S®ZR1-SLR03 | 5355.8220.03 |
| Mounting Rails, for other equipment (pair) | R&S®ZR1-SLR02 | 5353.9565.02 |
| AC Power Cord (German plug), PE cable | R&S®ZR1-PSEA | 5355.8514.02 |
| AC Power Cord (without plug), PE cable | R&S®ZR1-PSEA | 5355.8514.03 |
| AC Power Cord (NEMA L5-15P US plug), PE cable | R&S®ZR1-PSEA | 5355.8514.04 |
| AC Power Cord (NEMA L5-30P US plug), PE cable | R&S®ZR1-PSEA | 5355.8514.05 |
| AC Power Cord (JIS C8303 Japanese plug), PE cable | R&S®ZR1-PSEA | 5355.8514.06 |
| AC Power Cord (PRC3/16 Chinese plug), PE cable | R&S®ZR1-PSEA | 5355.8514.07 |
| Operating Manual, German, printed version | R&S®BBA-MA | 5355.8120.03 |
| Operating Manual, English, printed version | R&S®BBA-MA | 5355.8120.02 |
| Rack Wheels (4 wheels) | R&S®ZR1-RW | 5353.9707.03 |

Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

Rohde & Schwarz training

www.training.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- | North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- | China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 5214.8331.22 | Version 04.00 | November 2018 (as)

R&S®BBA130 Broadband Amplifier

Data without tolerance limits is not binding | Subject to change

© 2016 - 2018 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



5214833122