



CBA 230M-035 **150 kHz TO 230 MHz 35 WATT** **CLASS A BROADBAND AMPLIFIER**




- **Class A linear and low distortion design**
- **Ideal for IEC61000-4-6 testing**
- **Mismatch tolerant and unconditionally stable**
- **Rugged design for EMC testing**
- **Three year parts and labour warranty**

Designed specifically for Conducted EMC testing, this mismatch tolerant Class A amplifier is ideally suited to provide power into injection clamps and CDN for IEC61000-4-6 conducted susceptibility testing up to and beyond the normal 10 V emf test level.

The Class A design ensures a high reliability, low distortion linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. Front panel indicators are provided to indicate over-temperature.

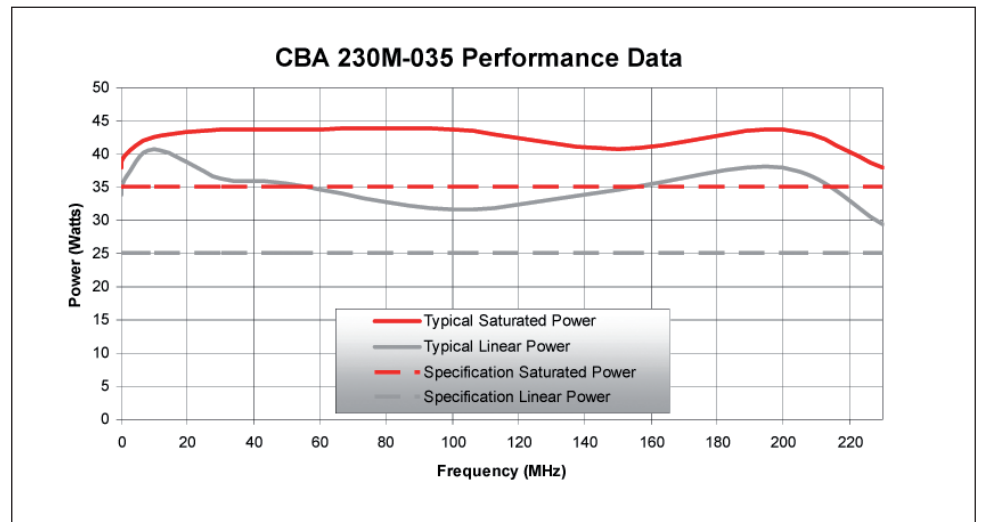

CBA 230M-035

150 kHz TO 230 MHz 35 WATT CLASS A BROADBAND AMPLIFIER

Technical specifications

Frequency range (instantaneous)	0.15 to 230 MHz
Rated output power	35 W minimum (37 W typical)
Output power at 1 dB gain compression	25 W minimum (30 W typical)
Gain	46 dB
Third order intercept point (see note 1)	55 dBm
Gain variation with frequency	±2 dB
Harmonics at 25 W output power	Better than -20 dBc
Output impedance	50 Ohms
Stability	Unconditional
Output VSWR tolerance (see note 2)	Infinite any phase
Input VSWR	2:1
Safety interlock	BNC female, s/c to mute
RF connector style	Type N female
USB interface	Optional
Supply voltage (single phase)	85 to 264 Vac
Supply frequency range	47 to 63 Hz
Supply power	<140 VA
Mains connector	IEC320
Conducted and radiated emissions	EN61326 Class A
Conducted and radiated immunity	EN61326: 1997 Table 1
Mains harmonic currents	EN61000-3-2
Voltage fluctuations and flicker	EN61000-3-3
Safety	EN61010-1
Case dimensions	19 inch, 3U case, 440 mm deep
Mass	12 kg
Operating temperature range	0 to 40°C
Options (select at time of ordering)	
341-712	Bench model with front panel mounted input/output connectors
341-812	Rack mountable with front panel mounted input/output connectors
341-912	Rack mountable with rear panel mounted input/output connectors

Teseq AG
 Nordstrasse 11F 4542 Luterbach Switzerland
 T +41 32 681 40 40 F +41 32 681 40 48
 sales@teseq.com www.teseq.com

© February 2012 Teseq®
 Specifications subject to change without notice.
 Teseq® is an ISO-registered company. Its products
 are designed and manufactured under the strict
 quality and environmental requirements of the ISO
 9001. This document has been carefully checked.
 However, Teseq® does not assume any liability for
 errors or inaccuracies.

691-164A February 2012

Notes:

1. The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
2. Output VSWR tolerance is specified for excitation within the permitted levels and frequency range.

TESEQ

Advanced Test Solutions for EMC