




# CBA 6G-050

## 1.8 GHz TO 6 GHz 50 WATT GaN BROADBAND AMPLIFIER

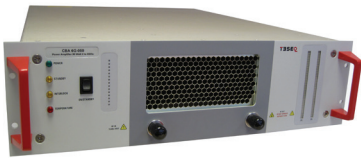


- High reliability gallium nitride technology
- Mismatch tolerant and unconditionally stable
- Wide instantaneous bandwidth
- Three year parts and labour warranty

Designed specifically for Radiated EMC testing, this mismatch tolerant amplifier delivers power continuously into the poor and variable match typically associated with testing above 1 GHz. Although antenna are usually well matched at these high frequencies, the presence of the EUT in the path of the antenna causes high levels of reflected power which the high breakdown voltage of GaN (Gallium Nitride) can handle with ease.

Although antenna gain is relatively constant, increasing cable losses at the higher frequencies demand increasing power with increasing frequency. Teseq amplifiers are therefore designed to maintain their high linear output power right up to and beyond the defined frequency range.

The GaN balanced pair design at the core of the amplifier ensures a high reliability, low distortion linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. A safety interlock connector is provided, which the user can short circuit to ground, to put the amplifier into standby mode. Front panel indicators are provided to indicate over-temperature and rf interlock condition.

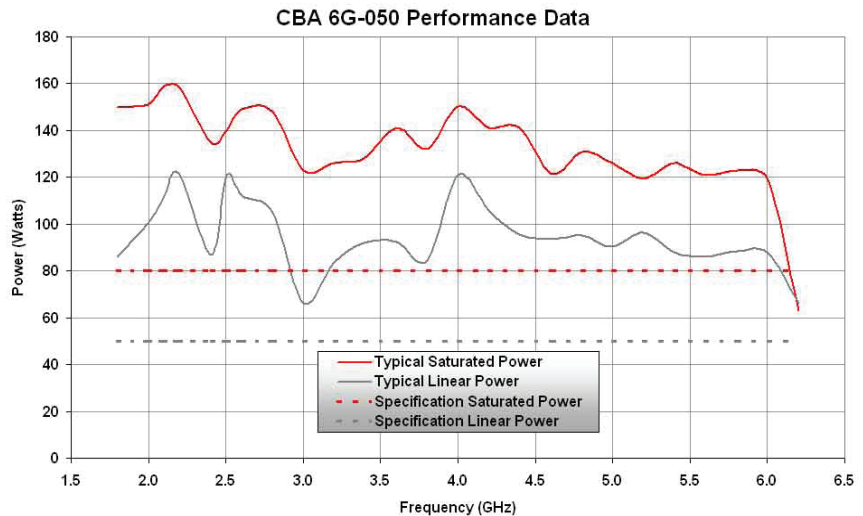

Advanced Test Solutions for EMC

# **CBA 6G-050**

## **1.8 GHz TO 6 GHz 50 WATT GaN BROADBAND AMPLIFIER**

### Technical specifications

Frequency range (instantaneous)	1800 to 6000 MHz
Rated output power	80 W minimum 90 W typical
Output power at 1 dB gain compression	50 W minimum 60 W typical
Gain	47 dB
Third order intercept point (see note 1)	54 dBm
Gain variation with frequency	±3 dB
Harmonics at 50 W output (2 GHz to 6 GHz)	Better than -20 dBc
Output impedance	50 Ohms
Stability	Unconditional
Output VSWR tolerance (see note 2)	Infinity:1
Input VSWR	2:1
RF connector style	Type N female
Safety interlock	D type, o/c to mute
USB interface	Optional
Supply voltage (single phase)	90 to 264 Vac
Supply frequency range	47 to 63 Hz
Supply power	<800 VA
Mains connector	TYCO 5 pin HG-Q
Conducted and radiated emissions	EN61326 Class A
Conducted and radiated immunity	EN61326: 1997 Table 1
Mains harmonic currents	EN61000-3-2
Voltage fluctuations and flicker	EN61000-3-3
Safety	EN61010-1
Case dimensions	19 inch, 3U case, 550 mm deep
Mass	25 kg
Operating temperature range	0 to 40°C
Options (select at time of ordering)	
342-804	Rack mountable with rear panel mounted input/output connectors
342-904	Rack mountable with front panel mounted input/output connectors

**Teseq AG**  
 Nordstrasse 11F 4542 Luterbach Switzerland  
 T +41 32 681 40 40 F +41 32 681 40 48  
 sales@teseq.com [www.teseq.com](http://www.teseq.com)

© February 2011 Teseq®  
 Specifications subject to change without notice.  
 Teseq® is an ISO-registered company. Its products  
 are designed and manufactured under the strict  
 quality and environmental requirements of the ISO  
 9001. This document has been carefully checked.  
 However, Teseq® does not assume any liability for  
 errors or inaccuracies.

691-183A February 2011

#### Notes:

1. The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
2. Output VSWR tolerance is specified for excitation within the permitted levels and frequency range.

**T E S E Q**

Advanced Test Solutions for EMC