

Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com www.AHSystems.com

SAS-585 Standard Gain Horn Antenna 8.2 GHz – 12.4 GHz

This Standard gain horn antenna has medium gain, low VSWR, and a constant antenna factor; excellent for both immunity and emissions testing.



* pictured mounted on an AEH-510 Tripod head

Frequency Range:8.2 GHz - 12.4 GHzAntenna Factor:34.6 dB/mGain:15.6 dBiMaximum Continuous
Power:250 WattsMax Radiated Field:500 V/mBeamwidth E-plane: 30° Beamwidth H-plane: 30° Impedance: 50Ω VSWR:1.3:1 (1.5:1 max)Connector:WR-90 to N-Type female adapter


Features

- Frequency Range of 8.2 GHz to 12.4 GHz
- Linearly Polarized High Gain, Low VSWR
- Individually Calibrated
- Three year Warranty

The Standard Gain Horn Antennas are designed specifically for utilization in emissions and immunity testing over the frequency range of 1 to 40 GHz. Each antenna is linearly polarized and has medium gain, low VSWR, and a constant antenna factor. The Standard Gain Horn performance is very precise and predictable through design parameters. Comparisons of measured versus computed antenna factors and gain have been shown to be +/- .5 dB. Therefore, the antenna is considered to be a standard reference, similar to that of a resonant dipole below 1 GHz. The coax-to-waveguide adapter is the only power-limiting component on the antenna and can be removed if high fields are desired. Each Standard Gain Horn comes with a tripod mount that adapts to any tripod with ½-20 male threads. Horizontal and vertical polarization is obtained by rotating the antenna on the tripod.

Recommended Accessories

- ATU-510 (Antenna Tripod Unit, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- SAC-18G-3 (3 Meter Low Loss Cable)

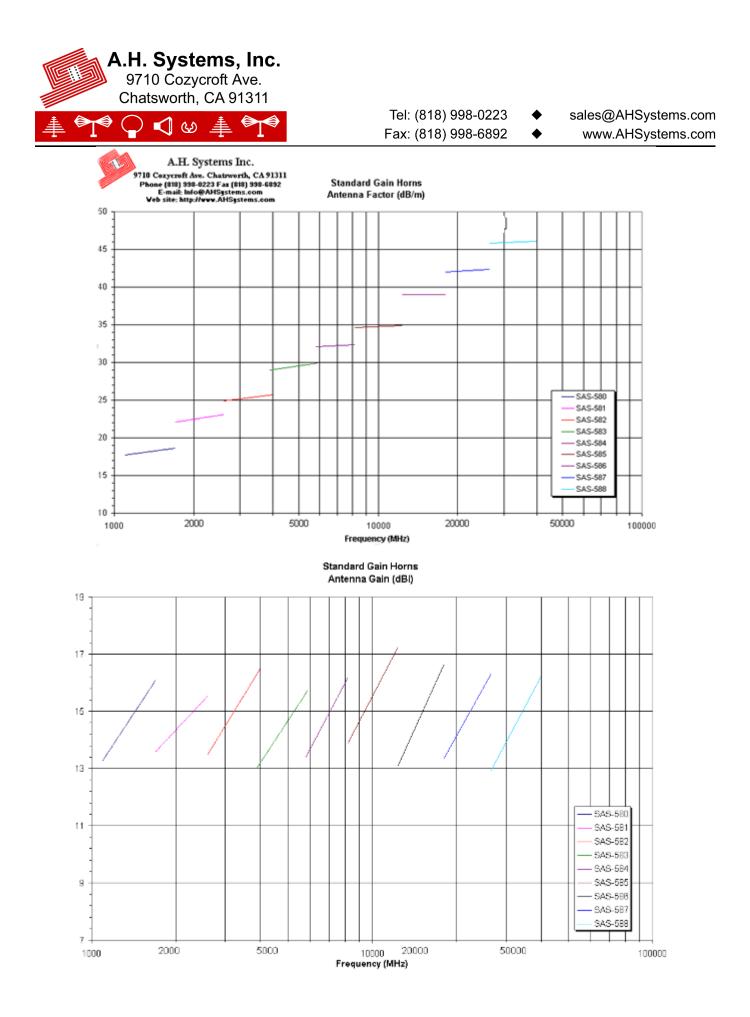

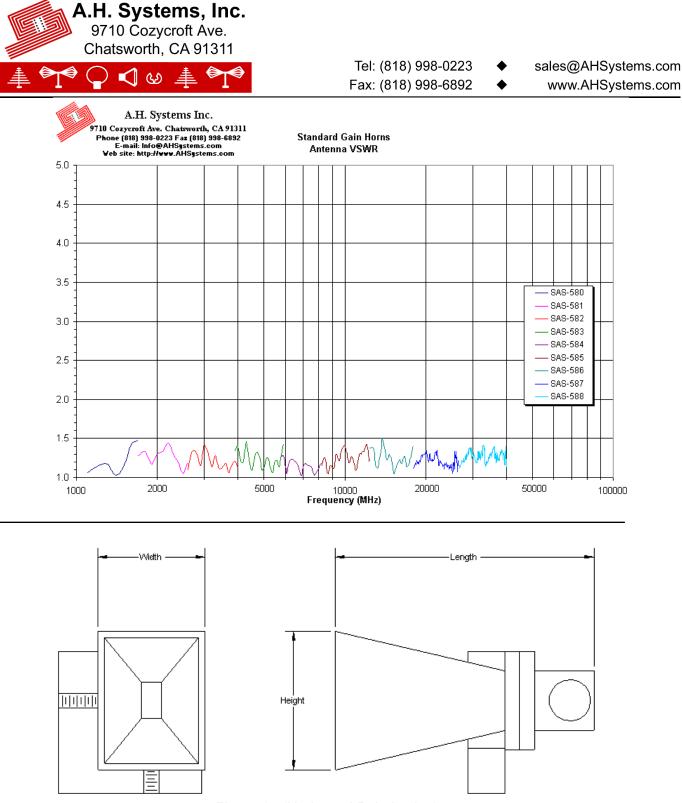


Figure 1 - (Horizontal Polarization)

Physical Dimensions:

Length:7.2 in. (18.3 cm) Width:2.1 in. (5.33 cm) Height:2.8 in. (7.11 cm) Weight:0.6 lb.'s (0.27 kg)