



CIP 9138 CURRENT INJECTION PROBE 4 kHz - 200 MHz




The CIP 9138 probe has been designed for MIL-STD-461G CS114 with the extended range from 4 kHz to 1 MHz for EUTs intended to be installed on ships or submarines. The CIP 9138 core material is highly efficient and thermally rugged, thus allowing very high injection levels to be achieved with low RF input power. It can withstand far higher powers than conventional ferrite (up to 1000 W), without changes in the characteristics in relation to the temperature.

The probe material meets the requirements of MIL-STD-461 CS114, ISO 11452-4 and other standards. The probe performance can be measured using calibration jig PCJ 9202.


Typical insertion loss

- Frequency range from 4 kHz to 200 (400) MHz
- High power handling (up to 1 kW)
- Ideal for automotive BCI testing e.g. MIL-STD-461 CS114, ISO 11452-4 and other standards

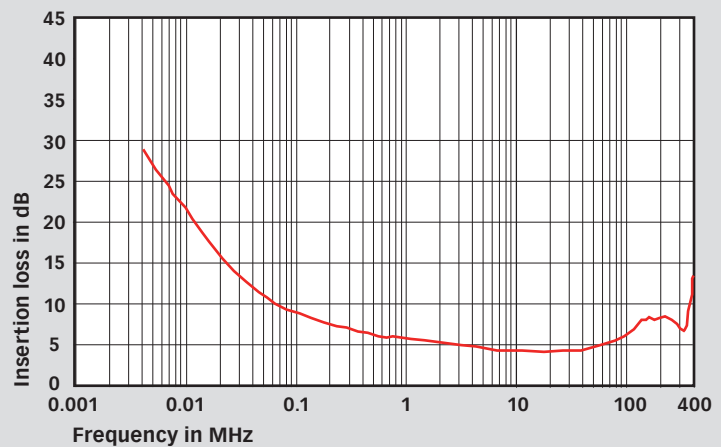


CIP 9138 CURRENT INJECTION PROBE 4 kHz - 200 MHz


Typical required forward power to inject — 77 dB μ A and — MIL-STD-461 CS114 curve #5

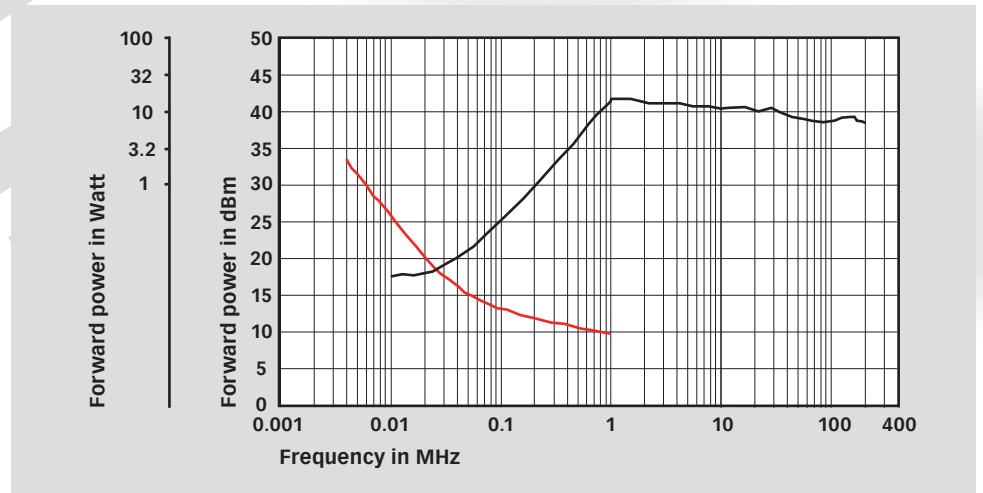

Example setup for test level setting

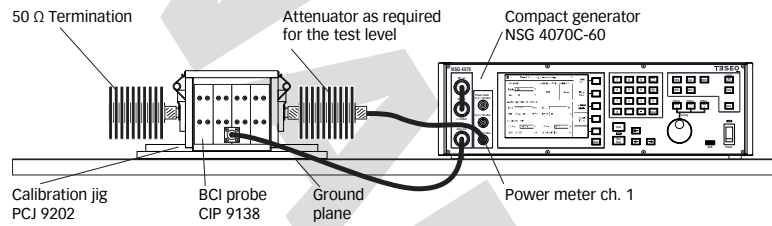

Example setup for testing

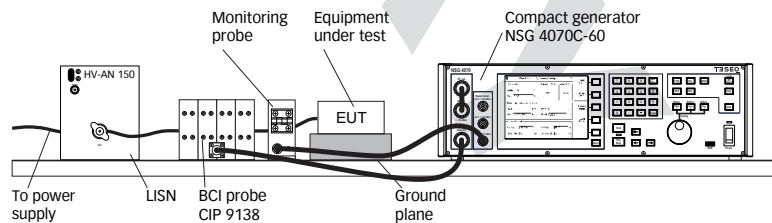

CIP 9138 CURRENT INJECTION PROBE 4 kHz - 200 MHz

Technical specifications

Frequency range:	4 kHz - 200 (400) MHz
Window diameter:	43 mm
Outside diameter:	113 mm
Width:	110 mm
Weight:	approx. 3.7 kg
Input connector:	Type N
Max. input power:	1000 W
Max. time for continuous operation:	related to the core temperature
Rating at 10 kHz/ 1000 W:	approx. 10 min*
Rating at 100 kHz/ 500 W:	approx. 7 min*
Rating at 150 kHz/ 500 W:	approx. 5 min*
Rating at 1 MHz to 400 MHz/ 400 W:	approx. 3 min*
Max core temperature:	90 °C
Turns ratio:	1:1

*) Time based on a core temperature rise from 23°C to max. 90°C

Model no. and options

Part number	Description
255714	CIP 9138 Current injection probe (BCI) 4 kHz-200 MHz
97-342-300	CIP-TC Traceable calibration (ISO17025), order only with CIP xxxx
252053	PCJ 9202 Calibration jig for CIP 9138, meets MIL-STD-461

AMETEK CTS Europe GmbH
Landsberger Str. 255 · 12623 Berlin · Germany
T +49 30 56 59 88 35 F +49 30 56 59 88 34
info.rf.cts@ametek.com www.ametek-cts.com

© March 2018 Teseq®
Specifications subject to change without notice.
Teseq® is an ISO-registered company. Its products are designed and manufactured under the strict quality and environmental requirements of the ISO 9001. This document has been carefully checked. However, Teseq® does not assume any liability for errors or inaccuracies.

82-255714 E02 March 2018