

R&S® BBA150 Broadband Amplifier Specifications



CONTENTS

Definitions	4
Frequency band from 9 kHz to 250 MHz	5
Power class 125 W.....	5
Power class 160 W.....	7
Power class 200 W.....	9
Power class 400 W.....	11
Power class 700 W.....	13
Power class 1300 W.....	15
Power class 2500 W.....	17
Frequency band from 4 kHz to 400 MHz	19
Power class 75 W.....	19
Power class 125 W.....	21
Power class 160 W.....	23
Power class 200 W.....	25
Power class 350 W.....	27
Power class 600 W.....	29
Frequency band from 80 MHz to 1 GHz	31
Power class 70 W.....	31
Power class 125 W.....	33
Power class 160 W.....	35
Power class 250 W.....	37
Power class 500 W.....	39
Power class 1000 W.....	41
Power class 1250 W.....	43
Power class 1500 W.....	45
Power class 2000 W.....	47
Power class 3000 W.....	49
Frequency band from 0.69 GHz to 3.2 GHz.....	51
Power class 30 W.....	51
Power class 60 W.....	53
Power class 110 W.....	55
Power class 200 W.....	57
Power class 400 W.....	59
Power class 800 W.....	61

Frequency band from 2.5 GHz to 6.0 GHz	63
Power class 15 W.....	63
Power class 30 W.....	65
Power class 60 W.....	67
Power class 100 W.....	69
Power class 200 W.....	71
Power class 400 W.....	73
General data	75
Modulation specifications.....	75
Cooling specifications.....	75
Control specifications	75
Environmental specifications	75
Protection.....	76
General RF specifications.....	76
RF switching specifications – input and measurement.....	77
RF switching specifications – output.....	78
Fast amplifier mute specifications.....	79
Ordering information	80
R&S®BBA150 single-band power amplifiers	80
R&S®BBA150 twin-band power amplifiers	81
R&S®BBA150 dual-band power amplifiers.....	82
Options.....	83
Service.....	83
Accessories.....	83

RoHS Europe, Directive 2011/65/EU: Equipment category 9, fulfilled without any exceptions.

WEEE Europe, Directive 2002/96/EC:

No disposing with unsorted municipal waste; no return with collection of waste electrical and electronic equipment from private households. Separate collection necessary. Ask Rohde & Schwarz representatives about recovery.

Definitions


General

Product data applies under the following conditions:

- 15 minutes warm-up operation
- All specified parameters are valid for an ambient temperature of +25 °C, input impedance of 50 Ω and output impedance of 50 Ω
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

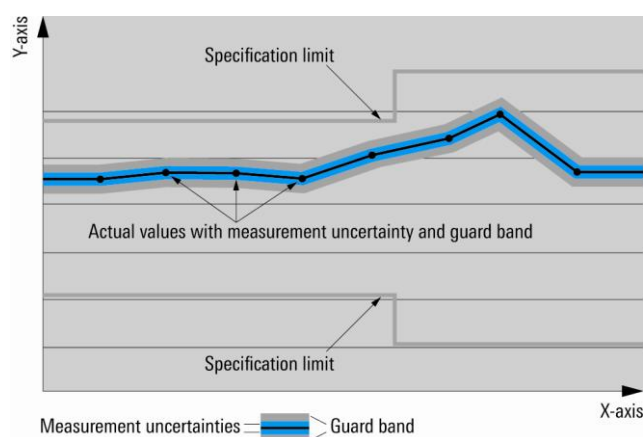

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.


Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Frequency band from 9 kHz to 250 MHz

Power class 125 W

Frequency response at 1 dB compression

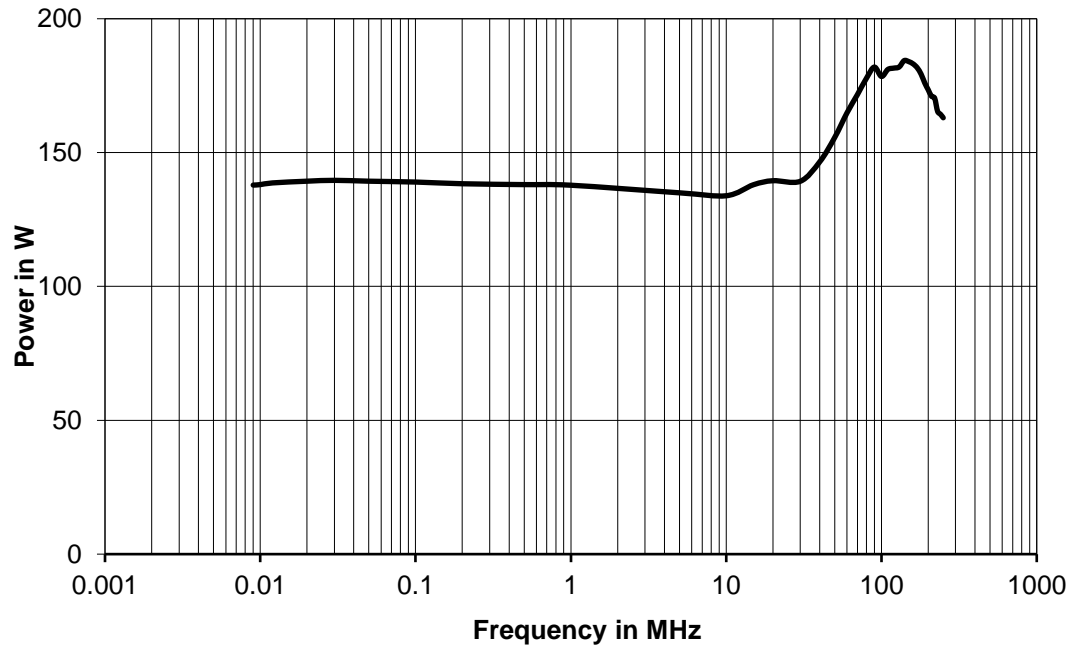

RF specifications

Main parameters		
Frequency range		9 kHz to 250 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		125 W (51.0 dBm)
Output power	9 kHz to 50 MHz	min. 125 W (51.0 dBm)
	50 MHz to 225 MHz	min. 140 W (51.5 dBm)
	225 MHz to 250 MHz	min. 125 W (51.0 dBm)
Output power at 1 dB compression		min. 125 W (51.0 dBm)
Nominal power gain	at 1 MHz	nom. 54.4 dB
Gain flatness		± 2.5 dB
Gain adjustment range		> 15 dB
Harmonics	at 125 W	< -20 dBc
Third-order intercept point (TOI)	200 kHz to 1 MHz (100 kHz apart)	nom. 61 dBm
	1 MHz to 120 MHz (1 MHz apart)	nom. 61 dBm
	120 MHz to 250 MHz (1 MHz apart)	nom. 60 dBm
Spurious	carrier offset > 100 kHz, from 1 MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	5 MHz to 50 MHz	nom. < 16.0 dB
	50 MHz to 250 MHz	nom. < 9.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 50 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rack mounting	19" ¹ / ₁ , 4 HU
Weight		approx. 16 kg (35 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	9.1 A
	at 230 V	4.4 A
Rated power	RF _{cw} = 125 W (RMS), VSWR = 1	1.0 kVA

Power class 160 W

Frequency response at 1 dB compression

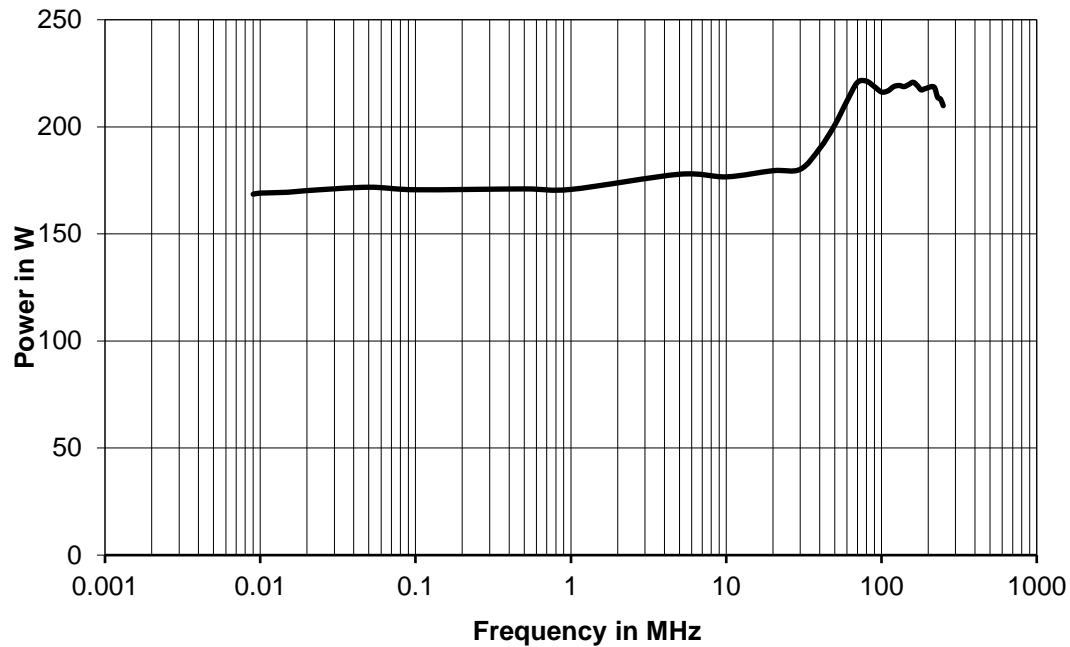

RF specifications

Main parameters		
Frequency range		9 kHz to 250 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		160 W (52.0 dBm)
Output power	9 kHz to 50 MHz	min. 160 W (52.0 dBm)
	50 MHz to 225 MHz	min. 180 W (52.6 dBm)
	225 MHz to 250 MHz	min. 160 W (52.0 dBm)
Output power at 1 dB compression		min. 160 W (52.0 dBm)
Nominal power gain	at 1 MHz	nom. 55.4 dB
Gain flatness		± 2.5 dB
Gain adjustment range		> 15 dB
Harmonics	at 160 W	< -20 dBc
Third-order intercept point (TOI)	200 kHz to 1 MHz (100 kHz apart)	nom. 61 dBm
	1 MHz to 120 MHz (1 MHz apart)	nom. 61 dBm
	120 MHz to 250 MHz (1 MHz apart)	nom. 60 dBm
Spurious	carrier offset > 100 kHz, from 1 MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	5 MHz to 50 MHz	nom. < 16.0 dB
	50 MHz to 250 MHz	nom. < 9.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 50 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 16 kg (35 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	9.1 A
	at 230 V	4.4 A
Rated power	RF _{cw} = 160 W (RMS), VSWR = 1	1.0 kVA

Power class 200 W

Frequency response at 1 dB compression

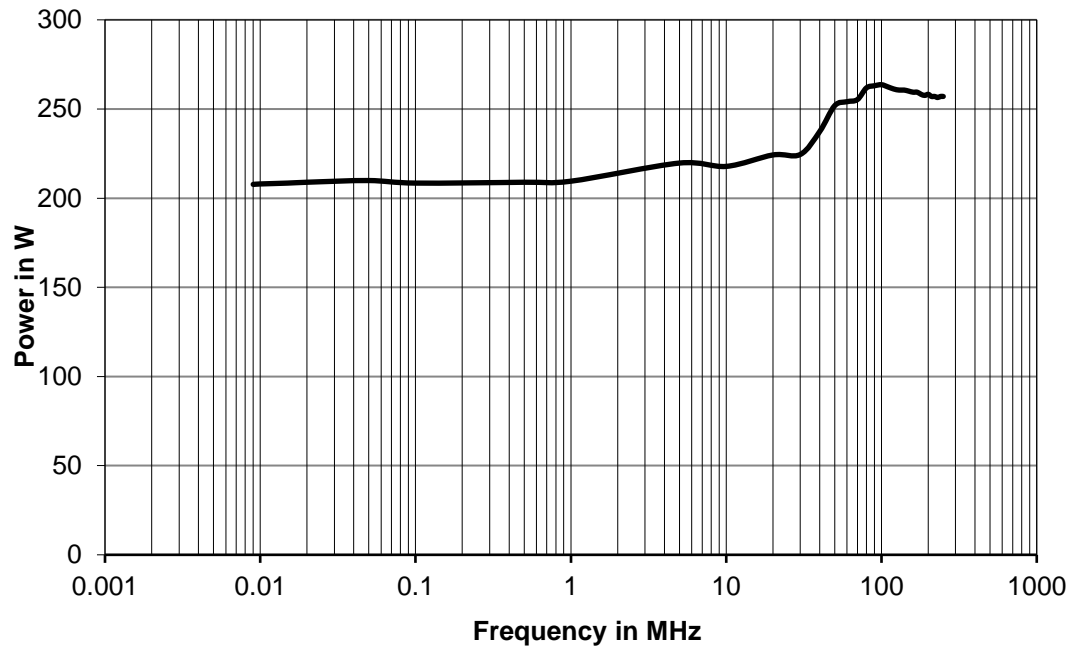

RF specifications

Main parameters		
Frequency range		9 kHz to 250 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		200 W (53.0 dBm)
Output power	9 kHz to 50 MHz	min. 200 W (53.0 dBm)
	50 MHz to 225 MHz	min. 230 W (53.6 dBm)
	225 MHz to 250 MHz	min. 200 W (53.0 dBm)
Output power at 1 dB compression		min. 200 W (53.0 dBm)
Nominal power gain	at 1 MHz	nom. 56.4 dB
Gain flatness		± 2.5 dB
Gain adjustment range		> 15 dB
Harmonics	at 200 W	< -20 dBc
Third-order intercept point (TOI)	200 kHz to 1 MHz (100 kHz apart)	nom. 61 dBm
	1 MHz to 120 MHz (1 MHz apart)	nom. 61 dBm
	120 MHz to 250 MHz (1 MHz apart)	nom. 60 dBm
Spurious	carrier offset > 100 kHz, from 1 MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	5 MHz to 50 MHz	nom. < 16.0 dB
	50 MHz to 250 MHz	nom. < 9.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 50 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 16 kg (35 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	9.1 A
	at 230 V	4.4 A
Rated power	RF _{cw} = 200 W (RMS), VSWR = 1	1.0 kVA

Power class 400 W

Frequency response at 1 dB compression

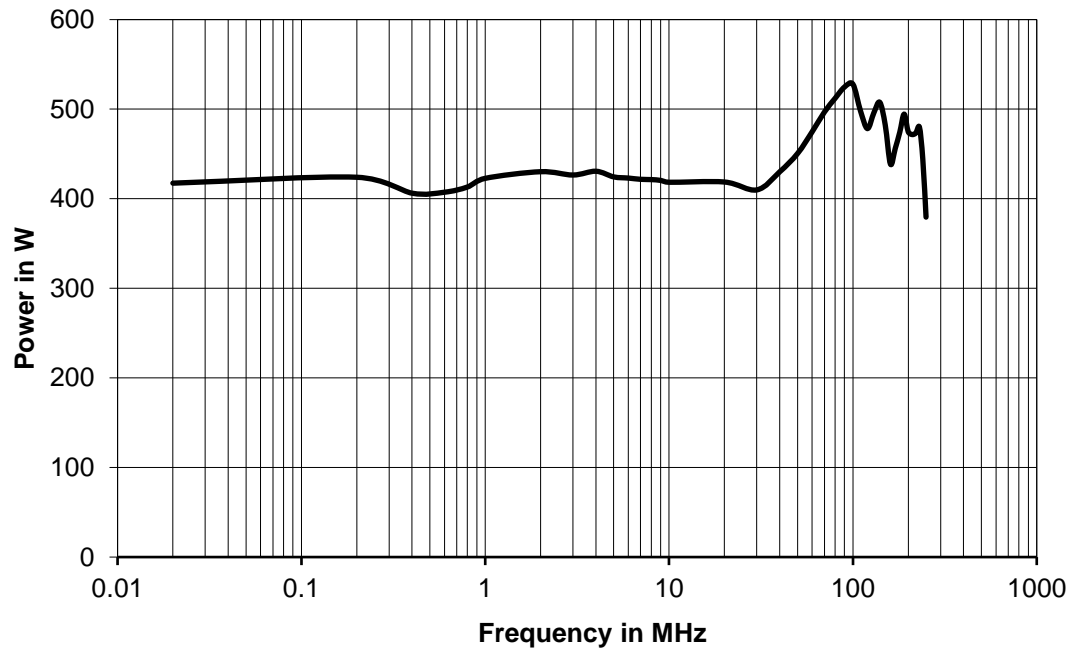

RF specifications

Main parameters		
Frequency range		9 kHz to 250 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		400 W (56.0 dBm)
Output power	9 kHz to 50 MHz	min. 385 W (55.9 dBm)
	50 MHz to 225 MHz	min. 400 W (56.0 dBm)
	225 MHz to 250 MHz	min. 385 W (55.9 dBm)
Power output at 1 dB compression	9 kHz to 225 MHz	min. 380 W (55.8 dBm)
	225 MHz to 250 MHz	min. 340 W (55.3 dBm)
Nominal power gain	at 1 MHz	nom. 59 dB
Gain flatness		± 2.5 dB
Gain adjustment range		> 15 dB
Harmonics	at 380 W	< -20 dBc
Third-order intercept point (TOI)	200 kHz to 1 MHz (100 kHz apart)	nom. 64 dBm
	1 MHz to 120 MHz (1 MHz apart)	nom. 64 dBm
	120 MHz to 250 MHz (1 MHz apart)	nom. 62 dBm
Spurious	carrier offset > 100 kHz, from 1 MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	5 MHz to 50 MHz	nom. < 16.0 dB
	50 MHz to 250 MHz	nom. < 9.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 50 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 24 kg (53 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		120 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
	at 230 V	8.7 A
Rated power	RF _{cw} = 400 W (RMS), VSWR = 1	2.0 kVA

Power class 700 W

Frequency response at 1 dB compression

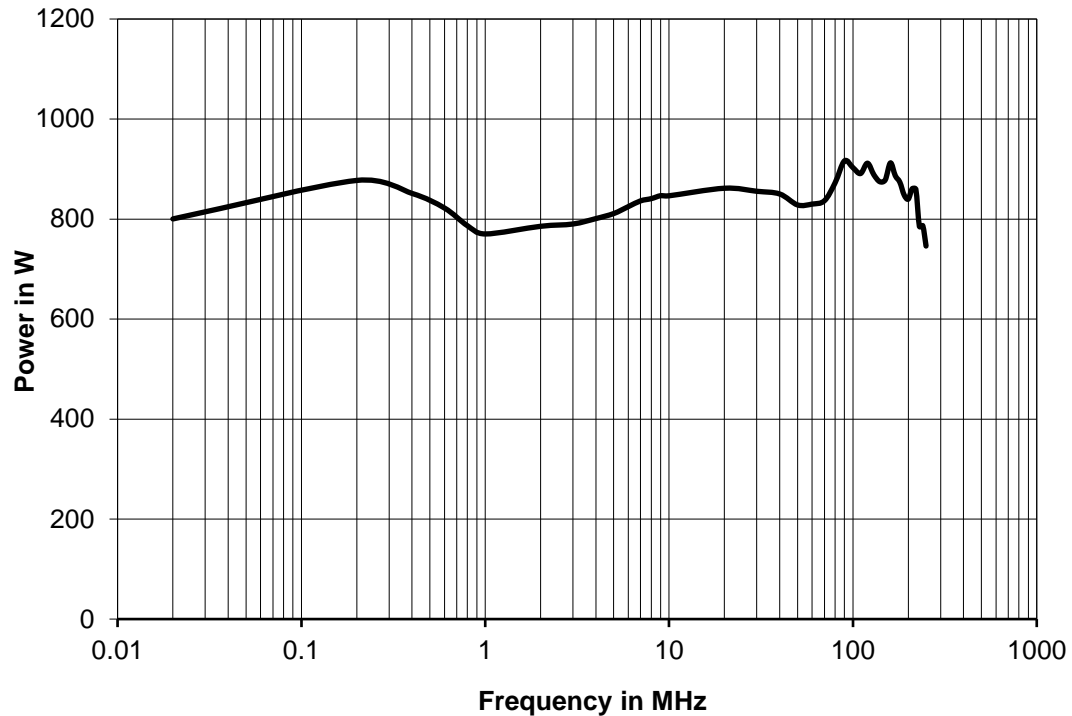

RF specifications

Main parameters		
Frequency range		9 kHz to 250 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		700 W (58.4 dBm)
Output power	9 kHz to 20 MHz	min. 710 W (58.5 dBm)
	20 MHz to 220 MHz	min. 800 W (59.0 dBm)
	220 MHz to 250 MHz	min. 710 W (58.5 dBm)
Power output at 1 dB compression	9 kHz to 220 MHz	min. 710 W (58.5 dBm)
	220 MHz to 250 MHz	min. 700 W (58.4 dBm)
Nominal power gain	at 1 MHz	nom. 62 dB
Gain flatness		± 2.5 dB
Gain adjustment range		> 15 dB
Harmonics	at 700 W	< -20 dBc
Third-order intercept point (TOI)	200 kHz to 1 MHz (100 kHz apart)	nom. 67 dBm
	1 MHz to 120 MHz (1 MHz apart)	nom. 67 dBm
	120 MHz to 250 MHz (1 MHz apart)	nom. 65 dBm
Spurious	carrier offset > 100 kHz, from 1 MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	5 MHz to 50 MHz	nom. < 16.0 dB
	50 MHz to 250 MHz	nom. < 9.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 64 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D	19" rack, 12 HU, depth: 800 mm (31.5 in)
Weight		approx. 120 kg (265 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	$7/_{16}$ female
	or rear panel	$7/_{16}$ female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		200 V to 240 V AC \pm 10 %, single phase 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V	15.7 A
Rated power	RF _{cw} = 700 W (RMS), VSWR = 1	3.6 kVA

Power class 1300 W

Frequency response at 1 dB compression

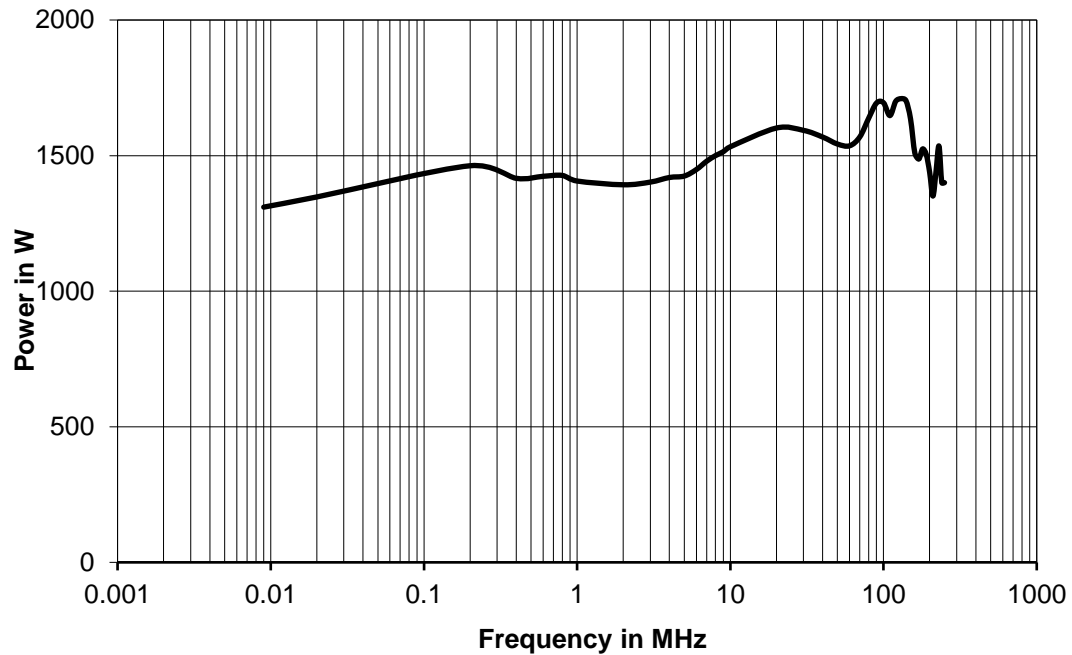

RF specifications

Main parameters		
Frequency range		9 kHz to 250 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		1300 W (61.1 dBm)
Output power	9 kHz to 20 MHz	min. 1300 W (61.1 dBm)
	20 MHz to 220 MHz	min. 1400 W (61.5 dBm)
	220 MHz to 250 MHz	min. 1300 W (61.1 dBm)
Output power at 1 dB compression	9 kHz to 220 MHz	min. 1300 W (61.1 dBm)
	220 MHz to 250 MHz	min. 1200 W (60.8 dBm)
Nominal power gain	at 1 MHz	nom. 64.5 dB
Gain flatness		±2.5 dB
Gain adjustment range		> 15 dB
Harmonics	at 1300 W	< -20 dBc
Third-order intercept point (TOI)	200 kHz to 1 MHz (100 kHz apart)	nom. 70 dBm
	1 MHz to 120 MHz (1 MHz apart)	nom. 70 dBm
	120 MHz to 250 MHz (1 MHz apart)	nom. 67 dBm
Spurious	carrier offset > 100 kHz, from 1 MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	5 MHz to 50 MHz	nom. < 16.0 dB
	50 MHz to 250 MHz	nom. < 9.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 65 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	rack setup	19" rack, 20 HU, depth: 1000 mm (39.4 in)
Weight	amplifier system incl. rack	approx. 200 kg (441 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	rear panel	1 $\frac{5}{8}$ " EIA female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 %
	optional	200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V per phase	15.2 A/15.2 A/0.5 A
Rated power	RF _{cw} = 1300 W (RMS), VSWR = 1	7 kVA

Power class 2500 W

Frequency response at 1 dB compression

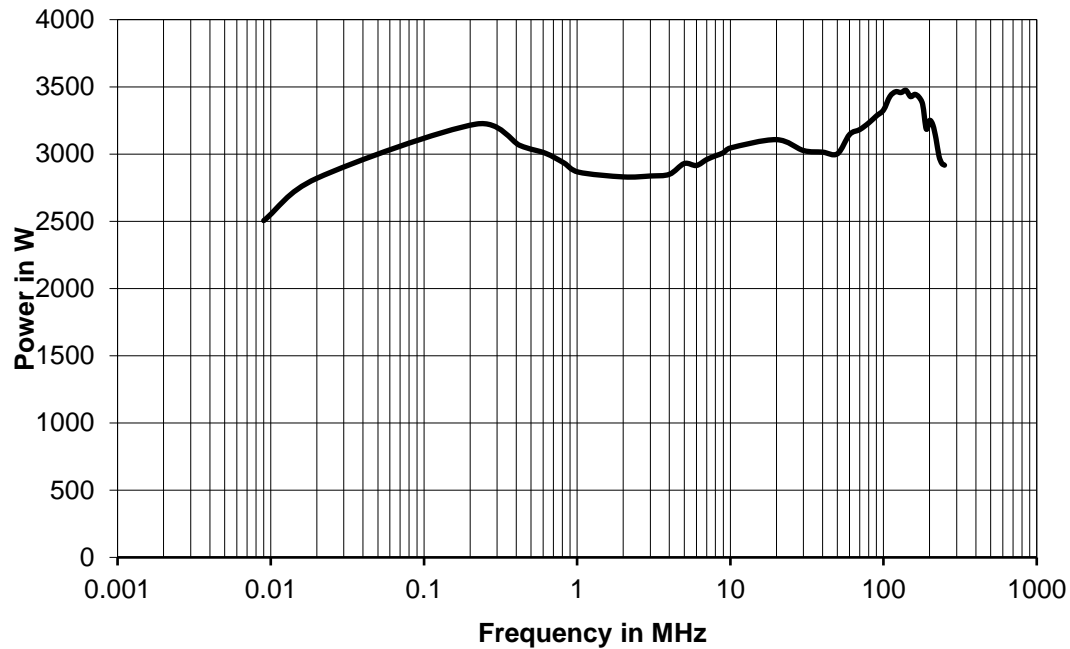

RF specifications

Main parameters		
Frequency range		9 kHz to 250 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		2500 W (64.0 dBm)
Output power	9 kHz to 20 kHz	min. 2500 W (64.0 dBm)
	20 kHz to 220 MHz	min. 3000 W (64.8 dBm)
	220 MHz to 250 MHz	min. 2500 W (64.0 dBm)
Output power at 1 dB compression		min. 2500 W (64.0 dBm)
Nominal power gain	at 1 MHz	nom. 67.4 dB
Gain flatness		± 2.8 dB
Gain adjustment range		> 15 dB
Harmonics	at 2500 W	< -20 dBc
Third-order intercept point (TOI)	200 kHz to 1 MHz (100 kHz apart)	nom. 71 dBm
	1 MHz to 120 MHz (1 MHz apart)	nom. 71 dBm
	120 MHz to 250 MHz (1 MHz apart)	nom. 70 dBm
Spurious	carrier offset > 100 kHz, from 1 MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	5 MHz to 50 MHz	nom. < 16.0 dB
	50 MHz to 250 MHz	nom. < 9.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 65 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	rack setup	19" rack, 35 HU, depth: 800 mm (31.5 in)
Weight	amplifier system incl. rack	approx. 315 kg (694 lb)

RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	rear panel	1 $\frac{5}{8}$ " EIA female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female


Electrical specifications

AC supply voltage		
Nominal operating voltage range		380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 %
	optional	200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V per phase	28.3 A/14.1 A/14.1 A
Rated power	RF _{cw} = 2500 W (RMS), VSWR = 1	13.0 kVA

Frequency band from 4 kHz to 400 MHz

Power class 75 W

Frequency response at 1 dB compression

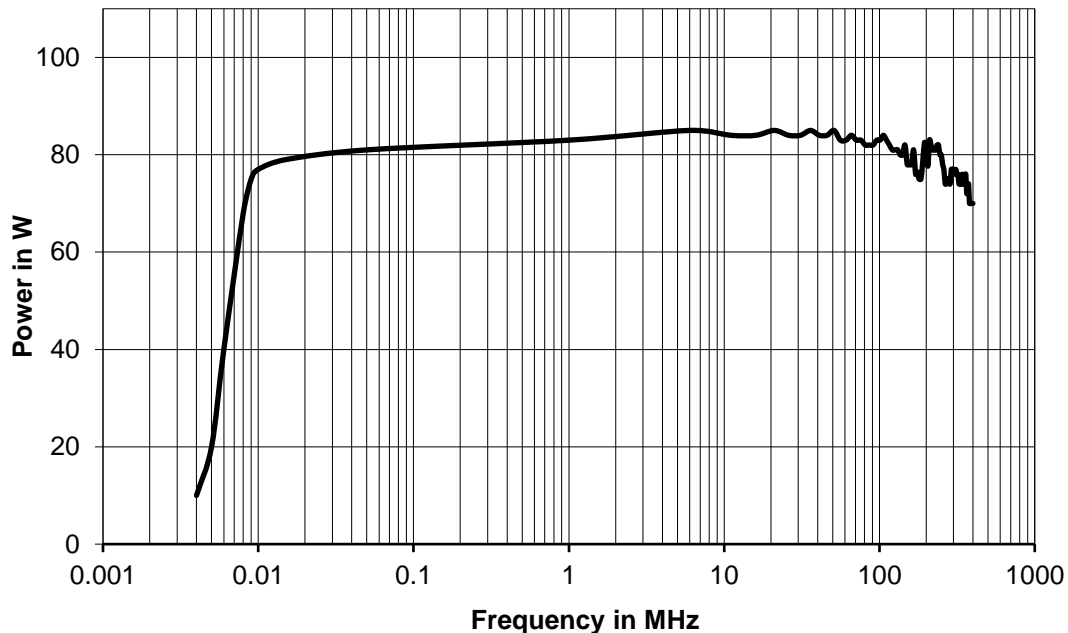

RF specifications

Main parameters		
Frequency range		4 kHz to 400 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		75 W (48.7 dBm)
Output power	4 kHz to 8 kHz	min. 10 W (40.0 dBm) at 4 kHz rising to 60 W (46.8 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 60 W (47.8 dBm)
	10 kHz to 250 MHz	min. 80 W (49.0 dBm)
	250 MHz to 400 MHz	min. 75 W (48.7 dBm)
Output power at 1 dB compression	4 kHz to 8 kHz	min. 10 W (40.0 dBm) at 4 kHz rising to 60 W (47.8 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 60 W (47.8 dBm)
	10 kHz to 250 MHz	min. 75 W (48.7 dBm)
	250 MHz to 400 MHz	min. 70 W (48.5 dBm)
Nominal power gain	at 150 MHz	nom. 52.1 dB
Gain flatness	8 kHz to 400 MHz	± 3 dB
Gain adjustment range		> 15 dB
Harmonics	at output power	< -20 dBc
Third-order intercept point (TOI)	test frequencies	
	200 kHz to 250 MHz (50 kHz apart)	nom. 56.0 dBm
	251 MHz to 400 MHz (50 kHz apart)	nom. 55.0 dBm
Spurious	carrier offset > 100 kHz, from 1MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	5 MHz to 400 MHz	nom. < 16.0 dB
Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 45 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rack mounting	19" ¹ / ₄ , 4 HU
Weight		approx. 16 kg (35 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	10.0 A
	at 230 V	4.8 A
Rated power	RF _{cw} = 75 W (eff.), VSWR = 1	1.1 kVA

Power class 125 W

Frequency response at 1 dB compression

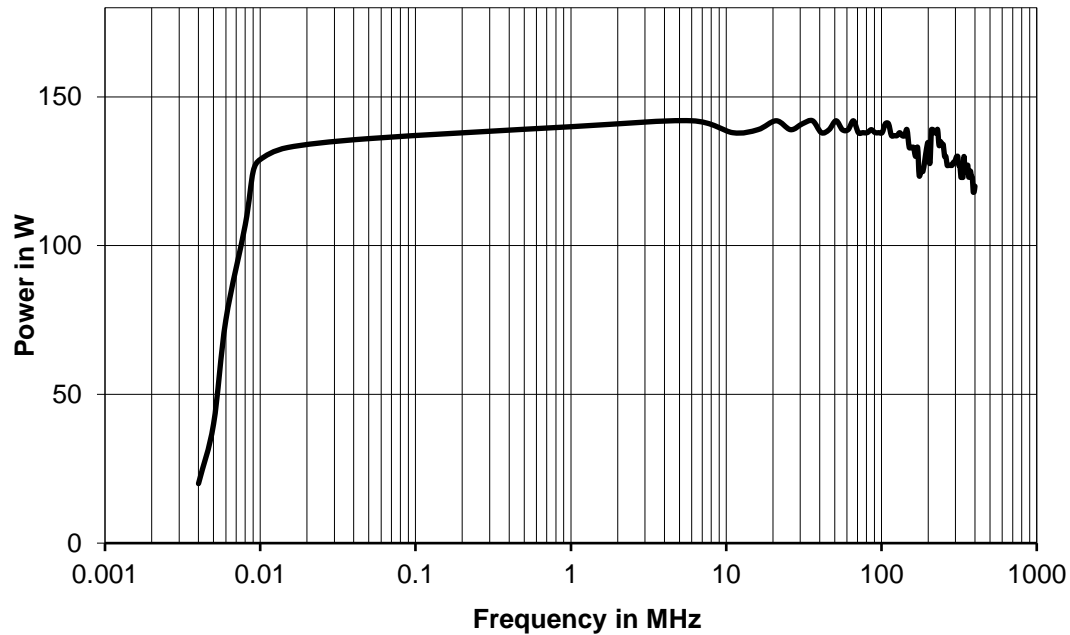

RF specifications

Main parameters		
Frequency range		4 kHz to 400 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		125 W (51.0 dBm)
Output power	4 kHz to 8 kHz	min. 20 W (43.0 dBm) at 4 kHz rising to 100 W (50.0 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 100 W (50.0 dBm)
	10 kHz to 250 MHz	min. 135 W (51.3 dBm)
	250 MHz to 400 MHz	min. 125 W (51.0 dBm)
Output power at 1 dB compression	4 kHz to 8 kHz	min. 20 W (43.0 dBm)) at 4 kHz rising to 100 W (50.0 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 100 W (50.0 dBm)
	10 kHz to 250 MHz	min. 125 W (51.0 dBm)
	250 MHz to 400 MHz	min. 115 W (50.6 dBm)
Nominal power gain	at 150 MHz	nom. 54.4 dB
Gain flatness	8 kHz to 400 MHz	± 3 dB
Gain adjustment range		> 15 dB
Harmonics	at output power	< -20 dBc
Third-order intercept point (TOI)	test frequencies	
	200 kHz to 250 MHz (50 kHz apart)	nom. 58.0 dBm
	251 MHz to 400 MHz (50 kHz apart)	nom. 57.0 dBm
Spurious	carrier offset > 100 kHz, from 1MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	5 MHz to 400 MHz	nom. < 16.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 45 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rack mounting	19" ¹ / ₁ , 4 HU
Weight		approx. 16 kg (35 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	10.0 A
	at 230 V	4.8 A
Rated power	RF _{cw} = 125 W (eff.), VSWR = 1	1.1 kVA

Power class 160 W

Frequency response at 1 dB compression

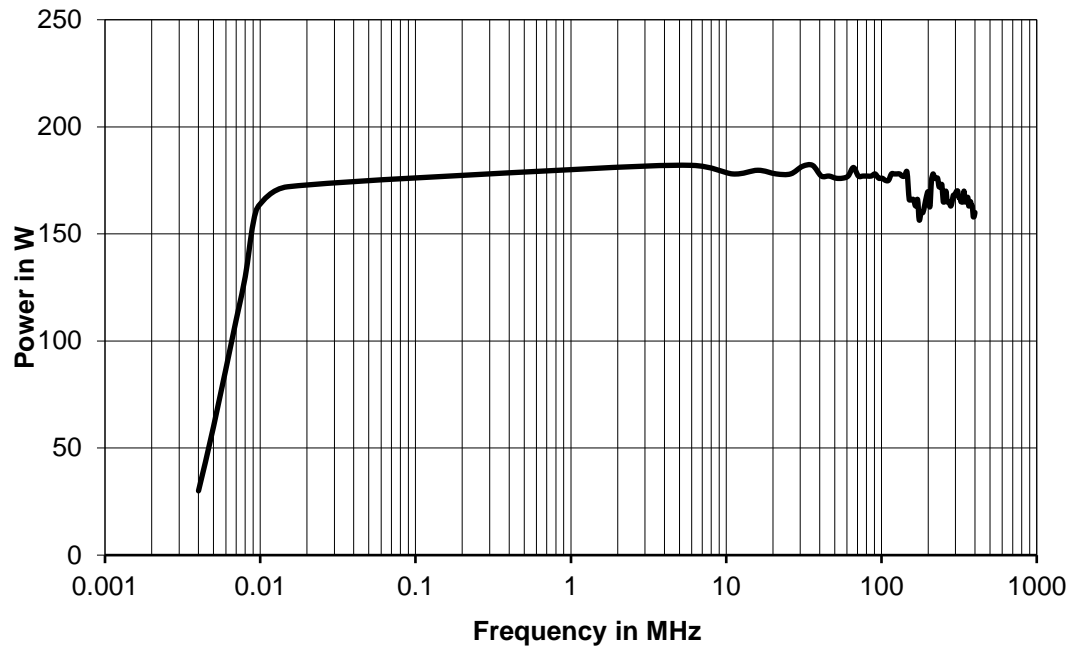

RF specifications

Main parameters		
Frequency range		4 kHz to 400 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		160 W (52.0 dBm)
Output power	4 kHz to 8 kHz	min 30 W (44.8 dBm) at 4 kHz rising to 120 W (50.8 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 120 W (50.8 dBm)
	10 kHz to 250 MHz	min. 170 W (52.3 dBm)
	250 MHz to 400 MHz	min. 160 W (52.0 dBm)
Output power at 1 dB compression	4 kHz to 8 kHz	min 30 W (44.8 dBm)) at 4 kHz rising to 120 W (50.8 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 120 W (50.8 dBm)
	10 kHz to 250 MHz	min. 160 W (52.0 dBm)
	250 MHz to 400 MHz	min. 150 W (51.8 dBm)
Nominal power gain	at 150 MHz	nom. 55.4 dB
Gain flatness	8 kHz to 400 MHz	± 3 dB
Gain adjustment range		> 15 dB
Harmonics	at output power	< -20 dBc
Third-order intercept point (TOI)	test frequencies	
	200 kHz to 250 MHz (50 kHz apart)	nom. 59.0 dBm
	251 MHz to 400 MHz (50 kHz apart)	nom. 58.0 dBm
Spurious	carrier offset > 100 kHz, from 1MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	5 MHz to 400 MHz	nom. < 16.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 45 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rack mounting	19" ¹ / ₁ , 4 HU
Weight		approx. 16 kg (35 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	10.0 A
	at 230 V	4.8 A
Rated power	RF _{cw} = 160 W (eff.), VSWR = 1	1.1 kVA

Power class 200 W

Frequency response at 1 dB compression

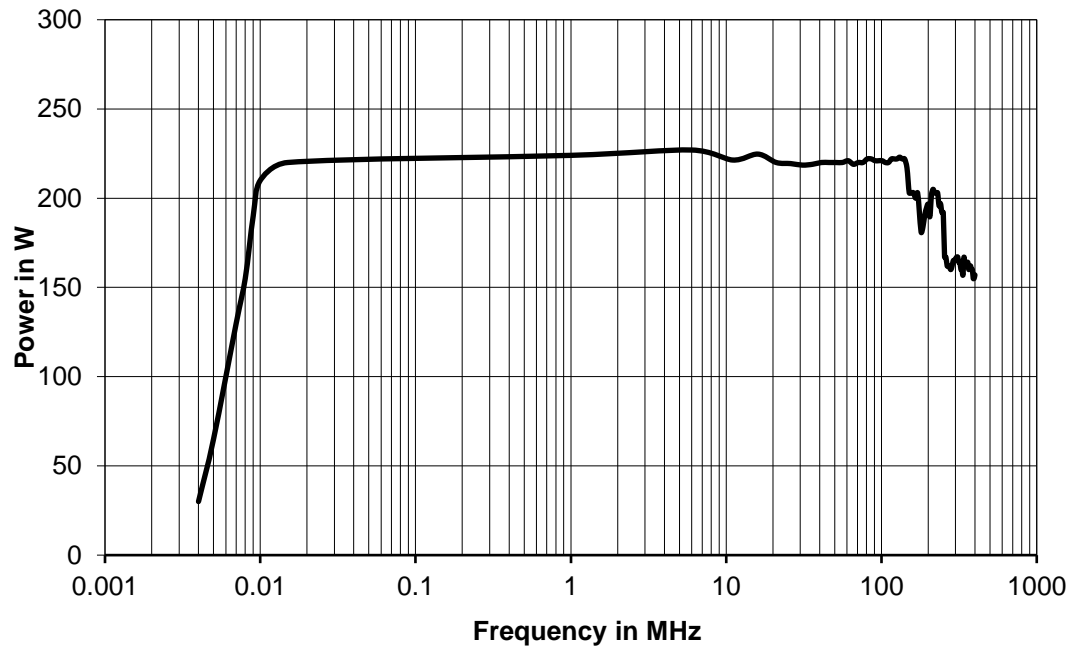

RF specifications

Main parameters		
Frequency range		4 kHz to 400 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		200 W (53.0 dBm)
Output power	4 kHz to 8 kHz	min 35 W (45.4 dBm) at 4 kHz rising to 140 W (51.5 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 140 W (51.5 dBm)
	10 kHz to 250 MHz	min. 210 W (53.3 dBm)
	250 MHz to 400 MHz	min. 160 W (52.0 dBm)
Output power at 1 dB compression	4 kHz to 8 kHz	min. 30 W (44.8 dBm) at 4 kHz rising to 140 W (51.5 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 140 W (51.5 dBm)
	10 kHz to 150 MHz	min. 200 W (53.0 dBm)
	150 MHz to 250 MHz	min. 180 W (52.6 dBm)
	250 MHz to 400 MHz	min. 150 W (51.8 dBm)
Nominal power gain	at 150 MHz	nom. 56 dB
Gain flatness	8 kHz to 400 MHz	± 3 dB
Gain adjustment range		> 15 dB
Harmonics	at output power	< -17 dBc
Third-order intercept point (TOI)	test frequencies	
	200 kHz to 250 MHz (50 kHz apart)	nom. 59.0 dBm
	251 MHz to 400 MHz (50 kHz apart)	nom. 58.0 dBm
Spurious	carrier offset > 100 kHz, from 1MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	5 MHz to 400 MHz	nom. < 16.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 45 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rack mounting	19" ¹ / ₁ , 4 HU
Weight		approx. 16 kg (35 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	10.0 A
	at 230 V	4.8 A
Rated power	RF _{cw} = 200 W (eff.), VSWR = 1	1.1 kVA

Power class 350 W

Frequency response at 1 dB compression

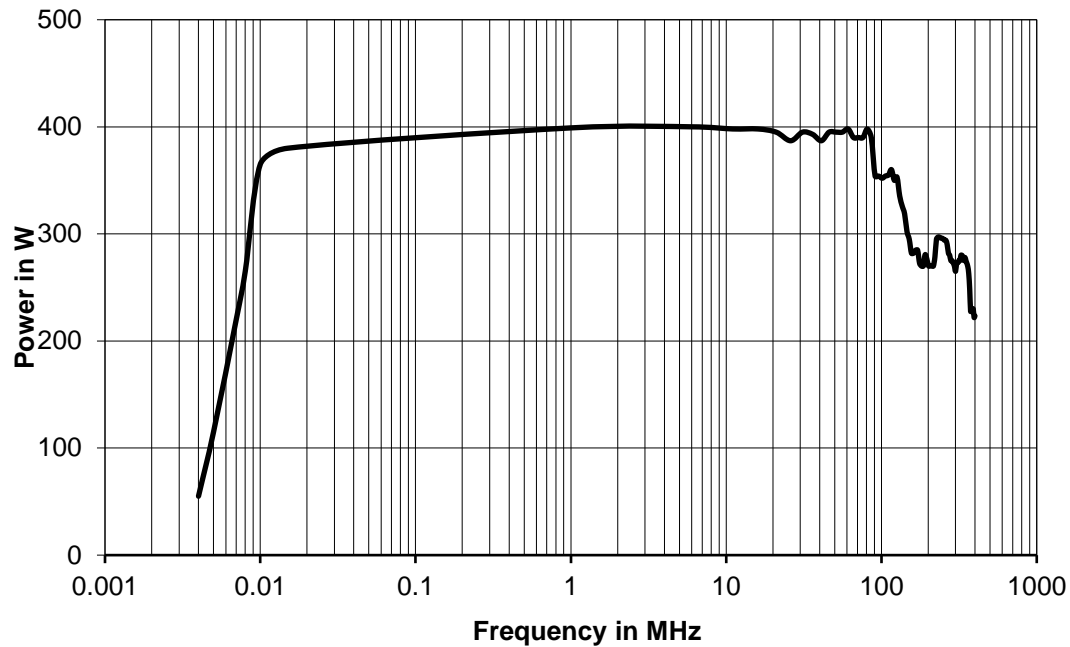

RF specifications

Main parameters		
Frequency range		4 kHz to 400 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		350 W (55.5 dBm)
Output power	4 kHz to 8 kHz	min. 60 W (47.8 dBm) at 4 kHz rising to 250 W (54.0 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 250 W (54.0 dBm)
	10 kHz to 250 MHz	min. 350 W (55.5 dBm)
	250 MHz to 400 MHz	min. 300 W (54.8 dBm)
Power output at 1 dB compression	4 kHz to 8 kHz	min 55 W (47.4 dBm)) at 4 kHz rising to 250 W (54.0 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 250 W (54.0 dBm)
	10 kHz to 130 MHz	min. 350 W (55.5 dBm)
	130 MHz to 250 MHz	min. 270 W (54.3 dBm)
	250 MHz to 400 MHz	min. 220 W (53.4 dBm)
Nominal power gain	at 150 MHz	nom. 58.9 dB
Gain flatness	8 kHz to 400 MHz	± 3 dB
Gain adjustment range		> 15 dB
Harmonics	at output power	< -17 dBc
Third-order intercept point (TOI)	test frequencies	
	200 kHz to 250 MHz (50 kHz apart)	nom. 61.0 dBm
	251 MHz to 400 MHz (50 kHz apart)	nom. 60.0 dBm
Spurious	carrier offset > 100 kHz, from 1MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	10 MHz to 400 MHz	nom. < 16.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 48 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rack mounting	19" ¹ / ₁ , 4 HU
Weight		approx. 24 kg (53 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		120 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
	at 230 V	8.7 A
Rated power	RF _{cw} = 350 W (eff.), VSWR = 1	2.0 kVA

Power class 600 W

Frequency response at 1 dB compression

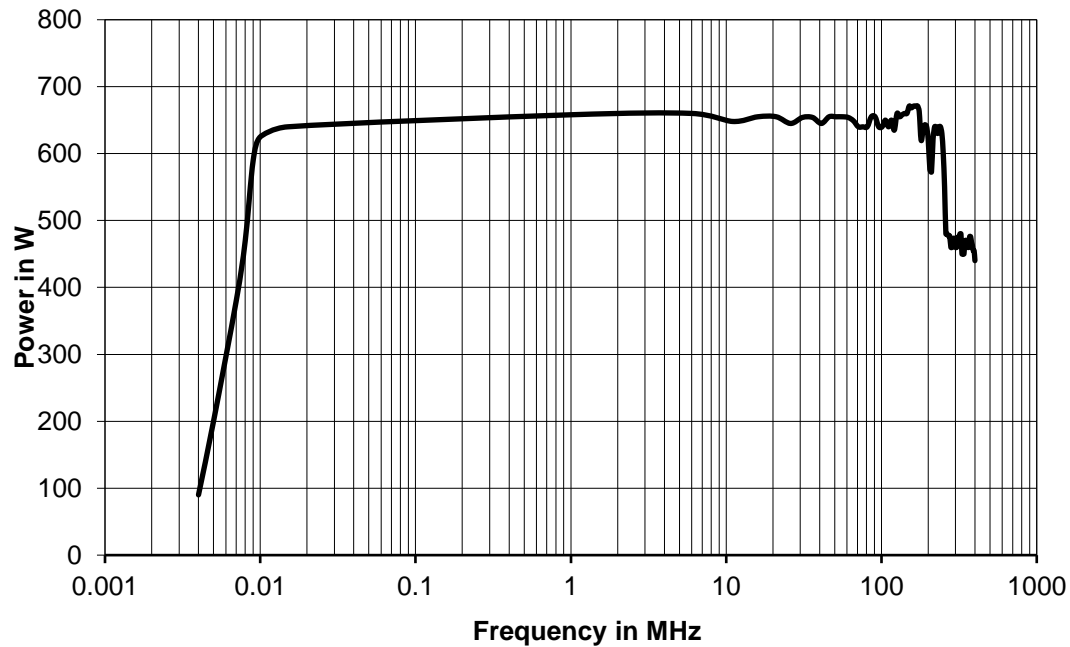

RF specifications

Main parameters		
Frequency range		4 kHz to 400 MHz instantaneously
Nominal output load		50 Ω
Nominal output power		600 W (57.8 dBm)
Output power	4 kHz to 8 kHz	min. 100 W (50 dBm) at 4 kHz rising to 450 W (56.5 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 450 W (56.5 dBm)
	10 kHz to 250 MHz	min. 630 W (58.0 dBm)
	250 MHz to 400 MHz	min. 420 W (56.2 dBm)
Power output at 1 dB compression	4 kHz to 8 kHz	min. 90 W (49.5 dBm) at 4 kHz rising to 450 W (56.5 dBm) at 8 kHz
	8 kHz to 10 kHz	min. 450 W (56.5 dBm)
	10 kHz to 150 MHz	min. 600 W (57.8 dBm)
	150 MHz to 250 MHz	min. 550 W (57.4 dBm)
	250 MHz to 400 MHz	min. 400 W (56.0 dBm)
Nominal power gain	at 150 MHz	nom. 61.2 dB
Gain flatness	8 kHz to 400 MHz	± 3 dB
Gain adjustment range		> 15 dB
Harmonics	at output power	< -17 dBc
Third-order intercept point (TOI)	test frequencies	
	200 kHz to 250 MHz (50 kHz apart)	nom. 64.0 dBm
	251 MHz to 400 MHz (50 kHz apart)	nom. 63.0 dBm
Spurious	carrier offset > 100 kHz, from 1MHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain	20 MHz to 400 MHz	nom. < 16.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+5 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 51 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D	19" rack, 12 HU, depth: 800 mm (31.5 in)
Weight		approx. 120 kg (265 lb)

RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	7/16 female
	or rear panel	7/16 female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female


Electrical specifications

AC supply voltage		
Nominal operating voltage range		200 V to 240 V AC \pm 10 %, single phase 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V	15.7 A
Rated power	RF _{cw} = 600 W (eff.), VSWR = 1	3.6 kVA

Frequency band from 80 MHz to 1 GHz

Power class 70 W

Frequency response at 1 dB compression

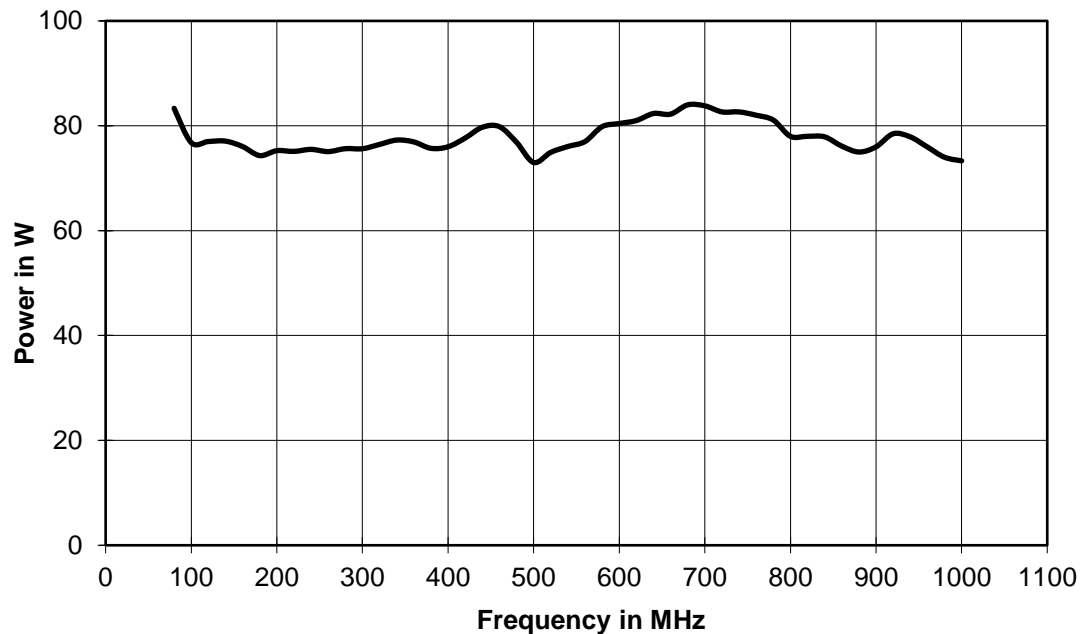

RF specifications

Main parameters		
Frequency range		80 MHz to 1 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		70 W (48.5 dBm)
Output power		min. 80 W (49.0 dBm)
Output power at 1 dB compression		min. 70 W (48.5 dBm)
Nominal power gain	at 400 MHz	nom. 51.9 dB
Gain flatness		± 3 dB
Gain adjustment range		> 15 dB
Harmonics	at 70 W	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 58 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -65 dBc
Noise figure at maximum gain		nom. < 10 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 57 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 16 kg (35 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	7.7 A
	at 230 V	3.7 A
Rated power	RF _{cw} = 70 W (RMS), VSWR = 1	850 VA

Power class 125 W

Frequency response at 1 dB compression

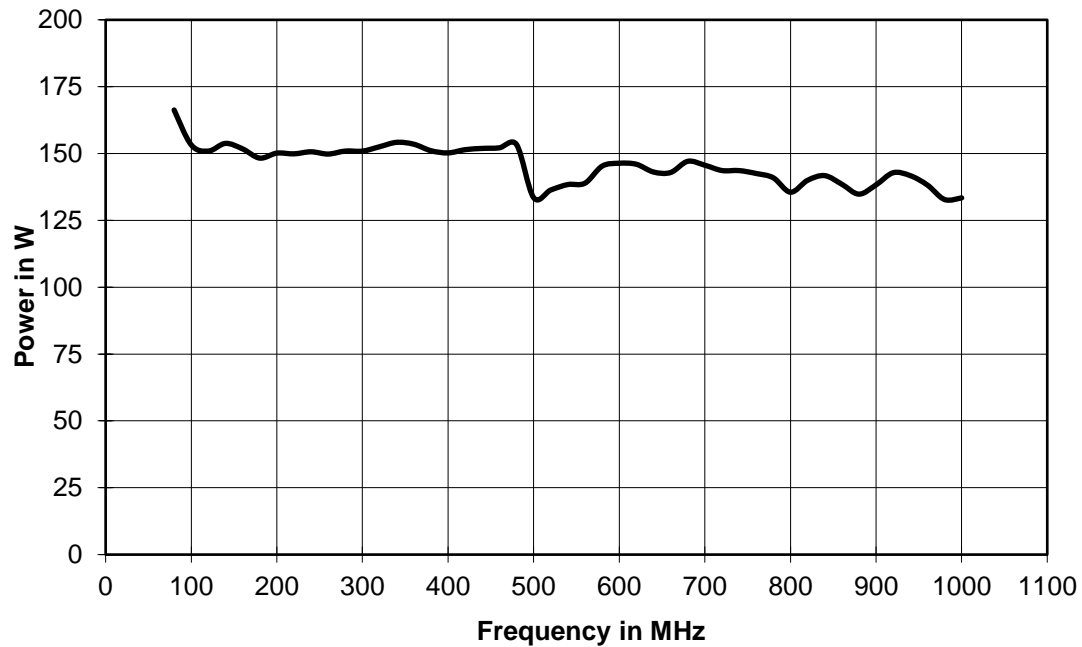

RF specifications

Main parameters		
Frequency range		80 MHz to 1 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		125 W (51.0 dBm)
Output power	< 400 MHz	min. 150 W (51.8 dBm)
	> 400 MHz	min. 135 W (51.3 dBm)
Output power at 1 dB compression	< 400 MHz	min. 140 W (51.5 dBm)
	> 400 MHz	min. 125 W (51.0 dBm)
Nominal power gain	at 400 MHz	nom. 54.4 dB
Gain flatness		± 3 dB
Gain adjustment range		> 15 dB
Harmonics	at 125 W, entire band except 320 MHz to 550 MHz	< -20 dBc
	at 125 W, 320 MHz to 550 MHz	< -17 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 58 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -65 dBc
Noise figure at maximum gain		nom. < 10 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 57 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 16 kg (35 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	7.7 A
	at 230 V	3.7 A
Rated power	RF _{cw} = 125 W (RMS), VSWR = 1	850 VA

Power class 160 W

Frequency response at 1 dB compression

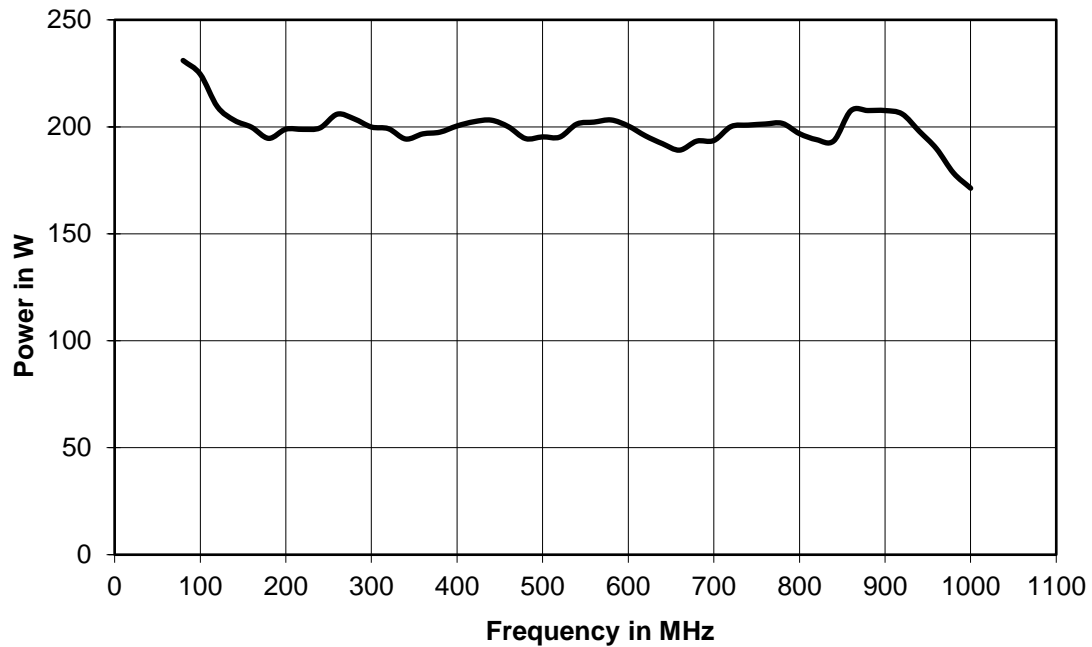

RF specifications

Main parameters		
Frequency range		80 MHz to 1 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		160 W (52.0 dBm)
Output power	< 400 MHz	min. 180 W (52.5 dBm)
	> 400 MHz	min. 170 W (52.3 dBm)
Output power at 1 dB compression	< 400 MHz	min. 175 W (52.4 dBm)
	> 400 MHz	min. 160 W (52.0 dBm)
Nominal power gain	at 400 MHz	nom. 55.4 dB
Gain flatness		± 3 dB
Gain adjustment range		> 15 dB
Harmonics	at 160 W, entire band except 320 MHz to 550 MHz	< -20 dBc
	at 160 W, 320 MHz to 550 MHz	< -17 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 61 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -65 dBc
Noise figure at maximum gain		nom. < 10 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 57 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 21 kg (46 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	15.4 A
	at 230 V	7.4 A
Rated power	RF _{cw} = 160 W (RMS), VSWR = 1	1.7 kVA

Power class 250 W

Frequency response at 1 dB compression

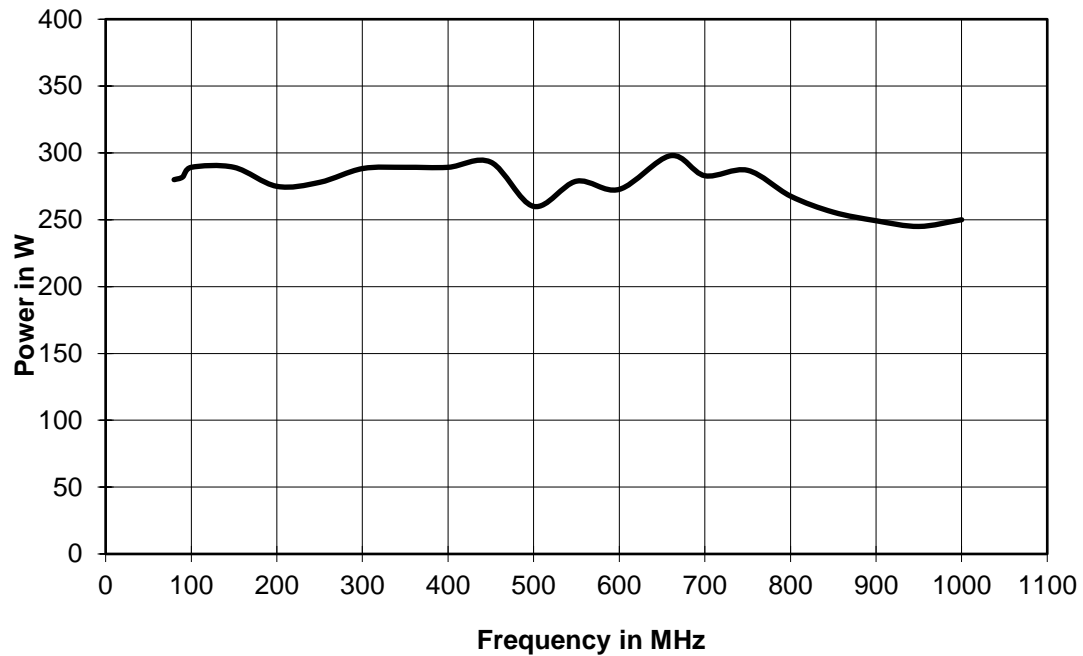

RF specifications

Main parameters		
Frequency range		80 MHz to 1 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		250 W (54.0 dBm)
Output power		min. 280 W (54.5 dBm)
Output power at 1 dB compression	< 400 MHz	min. 275 W (54.4 dBm)
	> 400 MHz	min. 225 W (53.5 dBm)
Nominal power gain	at 400 MHz	nom. 57.4 dB
Gain flatness		± 3 dB
Gain adjustment range		> 15 dB
Harmonics	at 250 W, entire band except 320 MHz to 550 MHz	< -20 dBc
	at 250 W, 320 MHz to 550 MHz	< -17 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 61 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -65 dBc
Noise figure at maximum gain		nom. < 10 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 58 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 21 kg (46 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	15.4 A
	at 230 V	7.4 A
Rated power	RF _{cw} = 250 W (RMS), VSWR = 1	1.7 kVA

Power class 500 W

Frequency response at 1 dB compression

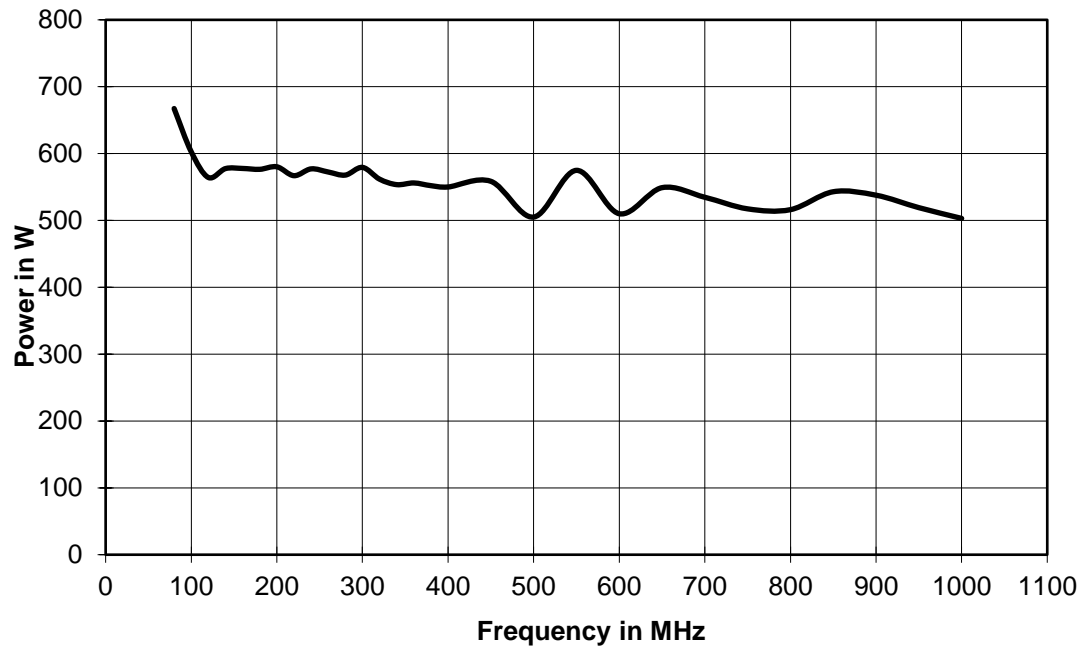

RF specifications

Main parameters		
Frequency range		80 MHz to 1 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		500 W (57.0 dBm)
Output power	< 400 MHz	min 580 W (57.6 dBm)
	> 400 MHz	min 530 W (57.2 dBm)
Output power at 1 dB compression	< 400 MHz	min. 550 W (57.4 dBm)
	> 400 MHz	min. 480 W (56.8 dBm)
Nominal power gain	at 400 MHz	nom. 60.4 dB
Gain flatness		± 3 dB
Gain adjustment range		> 15 dB
Harmonics	at 500 W, entire band except 320 MHz to 550 MHz	< -20 dBc
	at 500 W, 320 MHz to 550 MHz	< -17 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 64.0 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 10 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 58 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 33 kg (73 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		200 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V	12.0 A
Rated power	RF _{cw} = 500 W (RMS), VSWR = 1	2.75 kVA

Power class 1000 W

Frequency response at 1 dB compression

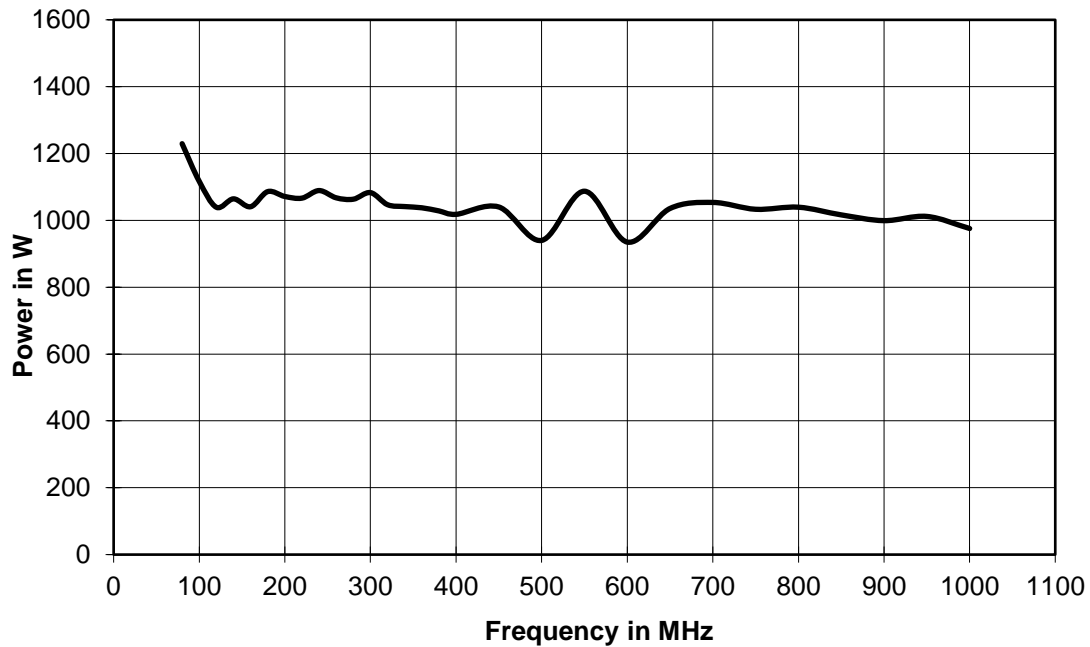

RF specifications

Main parameters		
Frequency range		80 MHz to 1 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		1000 W (60.0 dBm)
Output power	< 400 MHz	min. 1025 W (60.1 dBm)
	> 400 MHz	min. 925 W (59.7 dBm)
Output power at 1 dB compression	< 400 MHz	min. 1000 W (60.0 dBm)
	> 400 MHz	min. 850 W (59.3 dBm)
Nominal power gain	at 400 MHz	nom. 63.4 dB
Gain flatness		± 3.5 dB
Gain adjustment range		> 15 dB
Harmonics	at 1000 W, entire band except 320 MHz to 550 MHz	< -20 dBc
	at 1000 W, 320 MHz to 550 MHz	< -17 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 65 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 10 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 66 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	rack setup	19" rack, 12 HU, depth: 800 mm (31.5 in)
Weight	amplifier system incl. rack	approx. 120 kg (265 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	rear panel	$7/_{16}$ DIN female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		200 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
	optional	380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 %
		200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V per phase	13.0 A/13.0 A/0.1 A
Rated power	RF _{cw} = 1000 W (RMS), VSWR = 1	6.0 kVA

Power class 1250 W

Frequency response at 1 dB compression

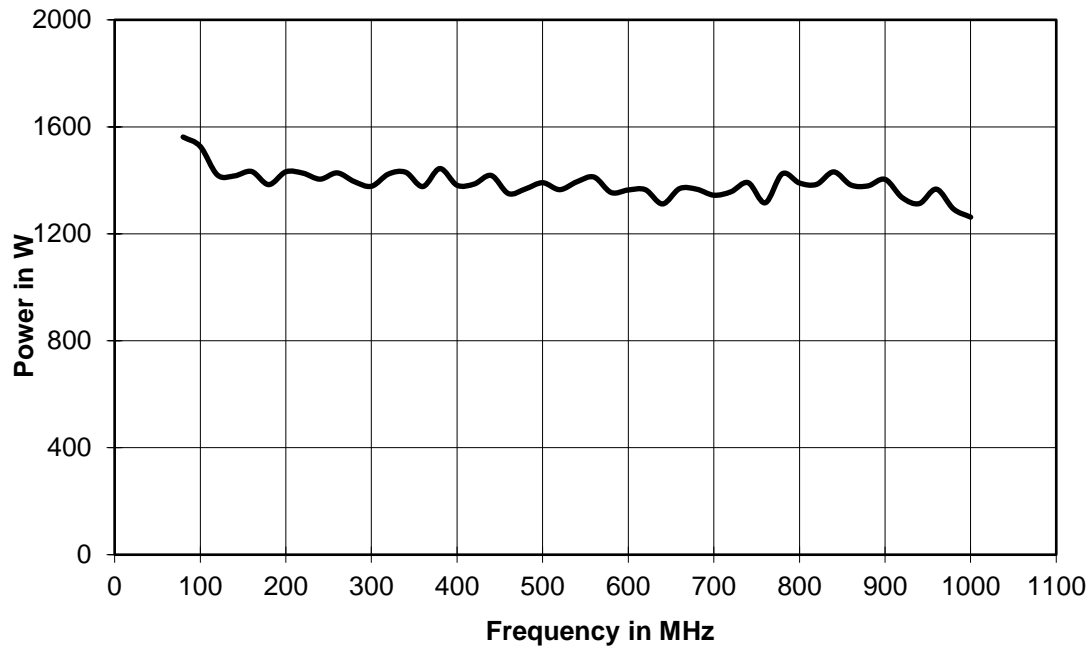

RF specifications

Main parameters		
Frequency range		80 MHz to 1 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		1250 W (60.9 dBm)
Output power	80 MHz to 400 MHz	min. 1300 W (61.1 dBm)
	400 MHz to 1 GHz	min. 1250 W (60.9 dBm)
Output power at 1 dB compression		min. 1250 W (60.9 dBm)
Nominal power gain	at 400 MHz	nom. 64.2 dB
Gain flatness		± 4 dB
Gain adjustment range		> 15 dB
Harmonics	at 1250 W, entire band except 320 MHz to 550 MHz	< -20 dBc
	at 1250 W, 320 MHz to 550 MHz	< -17 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 66.7 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 10 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 66 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	rack setup	19" rack, 20 HU, depth: 1000 mm (39.4 in)
Weight	amplifier system incl. rack	approx. 180 kg (397 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	rear panel	1 $\frac{5}{8}$ " EIA female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 %
	optional	200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V per phase	11.6 A
Rated power	RF _{cw} = 1250 W (RMS), VSWR = 1	8.0 kVA

Power class 1500 W

Frequency response at 1 dB compression

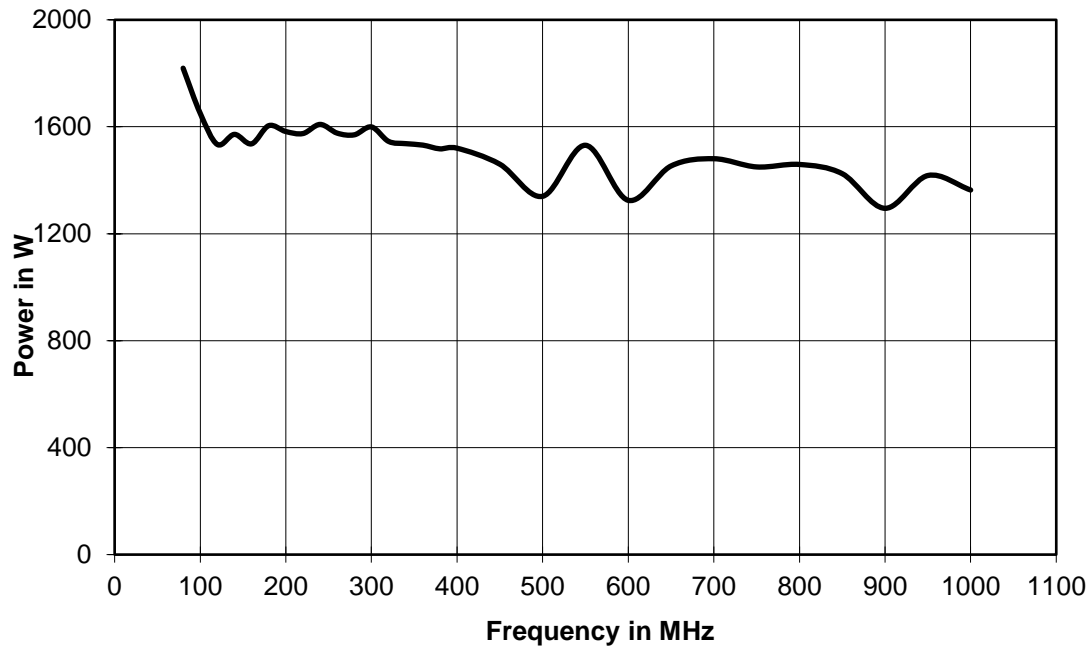

RF specifications

Main parameters		
Frequency range		80 MHz to 1 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		1500 W (61.8 dBm)
Output power	80 MHz to 400 MHz	min. 1550 W (62.0 dBm)
	400 MHz to 1 GHz	min. 1400 W (61.5 dBm)
Output power at 1 dB compression	80 MHz to 400 MHz	min. 1500 W (61.8 dBm)
	400 MHz to 1 GHz	min. 1300 W (61.2 dBm)
Nominal power gain	at 400 MHz	nom. 65.0 dB
Gain flatness		± 4 dB
Gain adjustment range		> 15 dB
Harmonics	at 1500 W, entire band except 320 MHz to 550 MHz	< -20 dBc
	at 1500 W, 320 MHz to 550 MHz	< -17 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 66.7 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 10 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 66 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	rack setup	19" rack, 20 HU, depth: 1000 mm (39.4 in)
Weight	amplifier system incl. rack	approx. 180 kg (397 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	rear panel	1 $\frac{5}{8}$ " EIA female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 %
	optional	200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V per phase	11.6 A
Rated power	RF _{cw} = 1500 W (RMS), VSWR = 1	8.0 kVA

Power class 2000 W

Frequency response at 1 dB compression

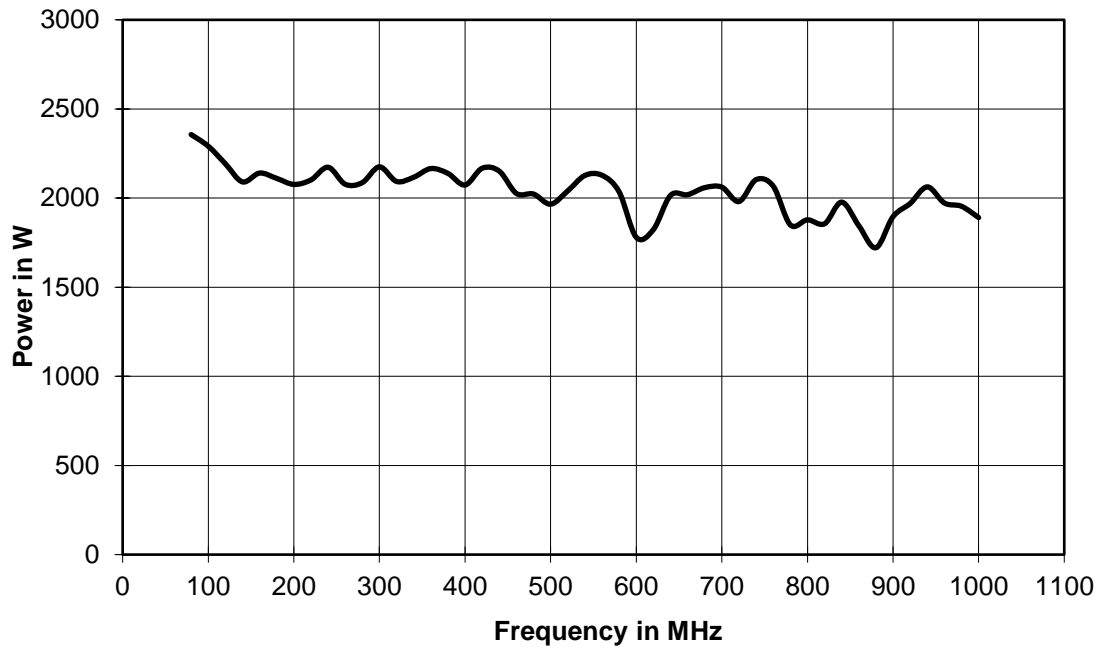

RF specifications

Main parameters		
Frequency range		80 MHz to 1 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		2000 W (63.0 dBm)
Output power	80 MHz to 400 MHz	min. 2000 W (63.0 dBm)
	400 MHz to 1 GHz	min. 1800 W (62.6 dBm)
Output power at 1 dB compression	80 MHz to 400 MHz	min. 2000 W (63.0 dBm)
	400 MHz to 1 GHz	min. 1600 W (62.0 dBm)
Nominal power gain	at 400 MHz	nom. 66.4 dB
Gain flatness		± 4 dB
Gain adjustment range		> 15 dB
Harmonics	at 2000 W, entire band except 320 MHz to 550 MHz	< -20 dBc
	at 2000 W, 320 MHz to 550 MHz	< -17 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 68.0 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 10 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 74 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	rack setup	19" rack, 20 HU, depth: 1000 mm (39.4 in)
Weight	amplifier system incl. rack	approx. 240 kg (551 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	rear panel	1 $\frac{5}{8}$ " EIA female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 %
	optional	200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V per phase	23.8 A/11.9 A/11.9 A
Rated power	RF _{cw} = 2000 W (RMS), VSWR = 1	11.0 kVA

Power class 3000 W

Frequency response at 1 dB compression

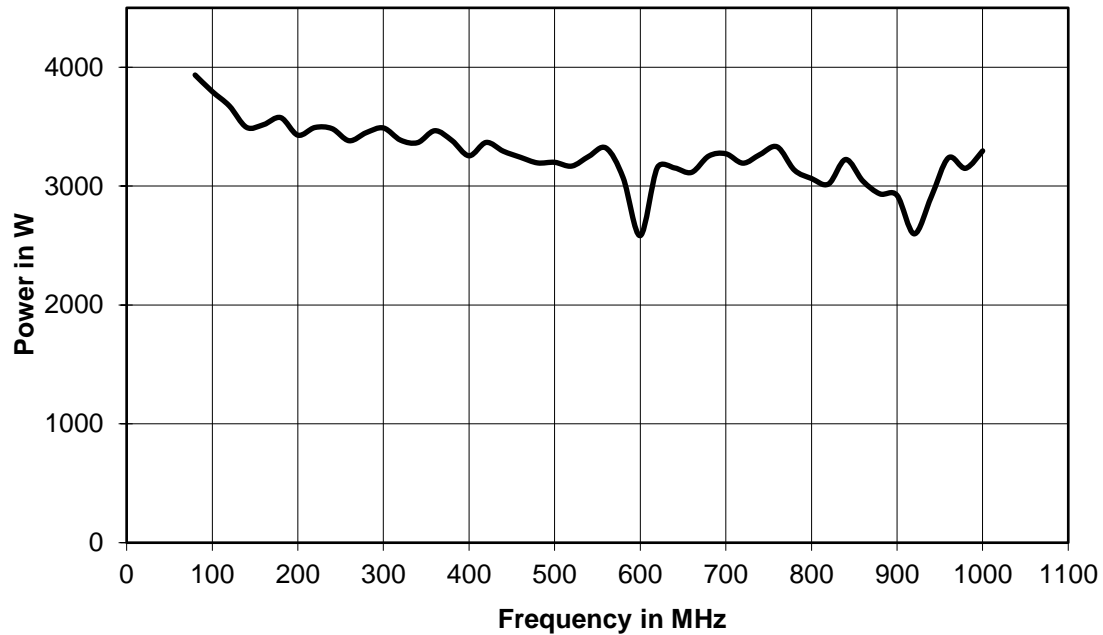

RF specifications

Main parameters		
Frequency range		80 MHz to 1 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		3000 W (64.8 dBm)
Output power	80 MHz to 400 MHz	min. 3100 W (64.9 dBm)
	400 MHz to 1 GHz	min. 2600 W (64.2 dBm)
Power output at 1 dB compression	80 MHz to 400 MHz	min. 3000 W (64.8 dBm)
	400 MHz to 1 GHz	min. 2400 W (63.8 dBm)
Nominal power gain	at 400 MHz	nom. 68.2 dB
Gain flatness		± 4 dB
Gain adjustment range		> 15 dB
Harmonics	at 3000 W, entire band except 320 MHz to 550 MHz	< -20 dBc
	at 3000 W, 320 MHz to 550 MHz	< -17 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 68.0 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 10 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 74 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	rack setup	19" rack, 35 HU, depth: 1000 mm (39.4 in)
Weight	amplifier system incl. rack	approx. 310 kg (551 lb)

RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	rear panel	1 $\frac{5}{8}$ " EIA female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female


Electrical specifications

AC supply voltage		
Nominal operating voltage range		380 V to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 %
	optional	200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V, per phase	23.8 A/23.8 A/23.8 A
Rated power	RF _{cw} = 3000 W (RMS), VSWR = 1	17.0 kVA

Frequency band from 0.69 GHz to 3.2 GHz

Power class 30 W

Frequency response at 1 dB compression

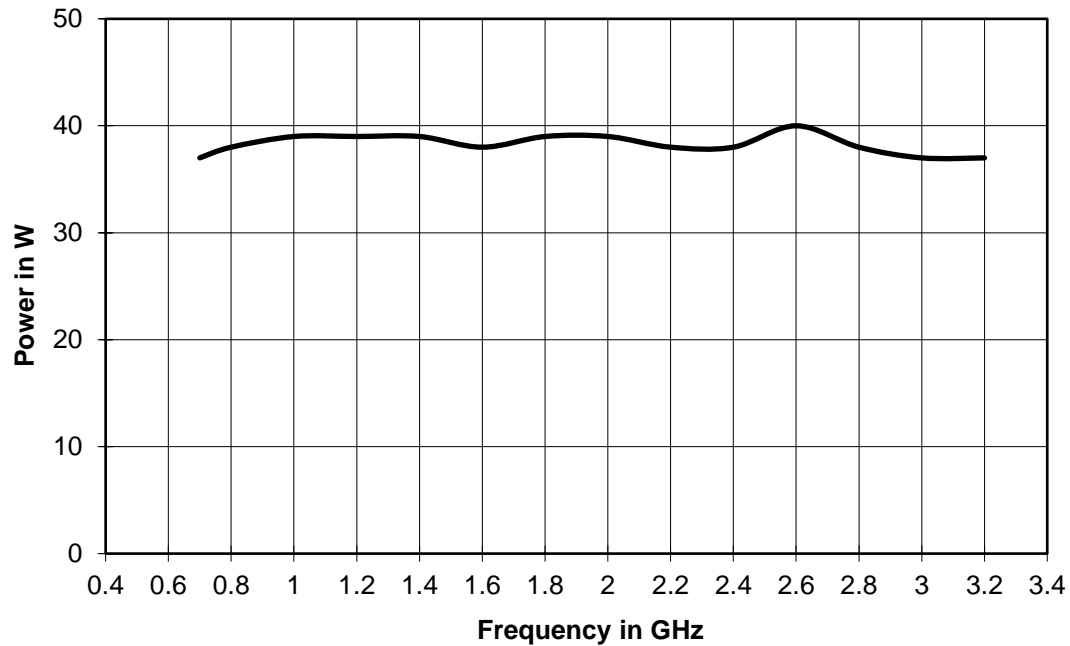

RF specifications

Main parameters		
Frequency range		0.69 GHz to 3.2 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		30 W (44.8 dBm)
Output power		min. 35 W (45.4 dBm)
Power output at 1 dB compression		min. 30 W (44.8 dBm)
Nominal power gain	at 3000 MHz	nom. 48.2 dB
Gain flatness		± 2.0 dB
Gain adjustment range		> 15 dB
Harmonics	at 30 W, < 1.1 GHz	< -18 dBc
	at 30 W, \geq 1.1 GHz	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 50 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure	at maximum gain	nom. < 12.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 46 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rack mounting	19" ¹ / ₁ , 4 HU
Weight		approx. 11 kg (24 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	3.1 A
	at 230 V	1.5 A
Rated power	RF _{cw} = 30 W (RMS), VSWR = 1	350 VA

Power class 60 W

Frequency response at 1 dB compression

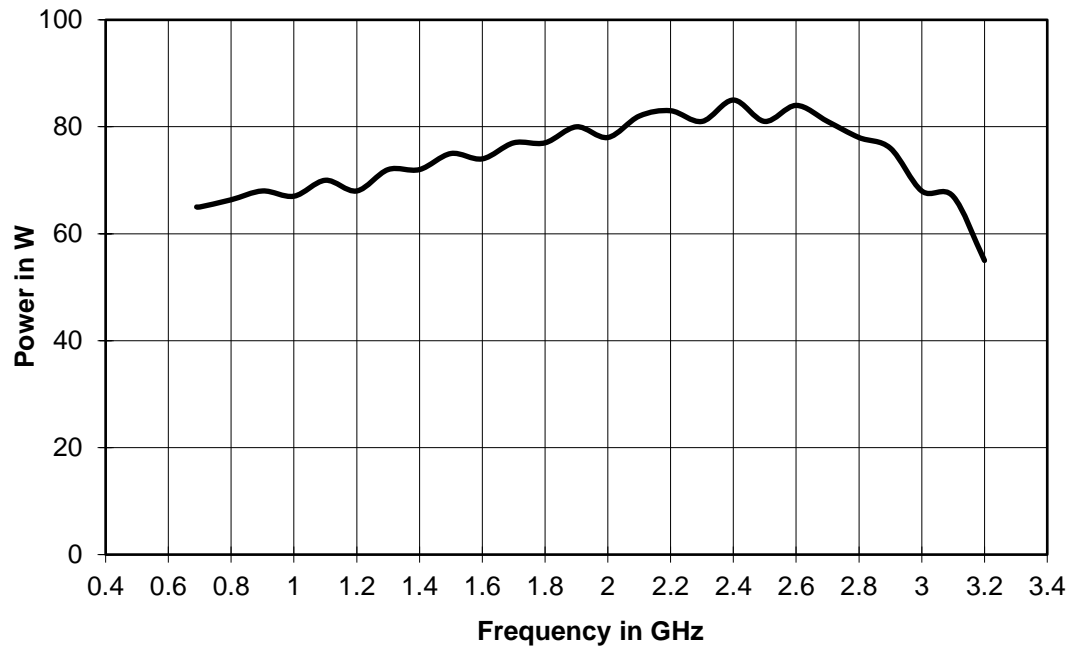

RF specifications

Main parameters		
Frequency range		0.69 GHz to 3.2 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		60 W (47.8 dBm)
Output power		min. 65 W (48.1 dBm)
Power output at 1 dB compression	< 0.8 GHz	min. 53 W (47.2 dBm)
	≥ 0.8 GHz < 2.2 GHz	min. 60 W (47.8 dBm)
	≥ 2.2 GHz	min. 55 W (47.4 dBm)
Nominal power gain	at 3000 MHz	nom. 51.2 dB
Gain flatness		± 2 dB
Gain adjustment range		> 15 dB
Harmonics	at 60 W, < 1.8 GHz	< -17 dBc
	at 60 W, ≥ 1.8 GHz	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 52.5 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max -70 dBc
Noise figure	at maximum gain	nom. < 12.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 46 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 13 kg (29 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	5.2 A
	at 230 V	2.5 A
Rated power	RF _{cw} = 60 W (RMS), VSWR = 1	570 VA

Power class 110 W

Frequency response at 1 dB compression

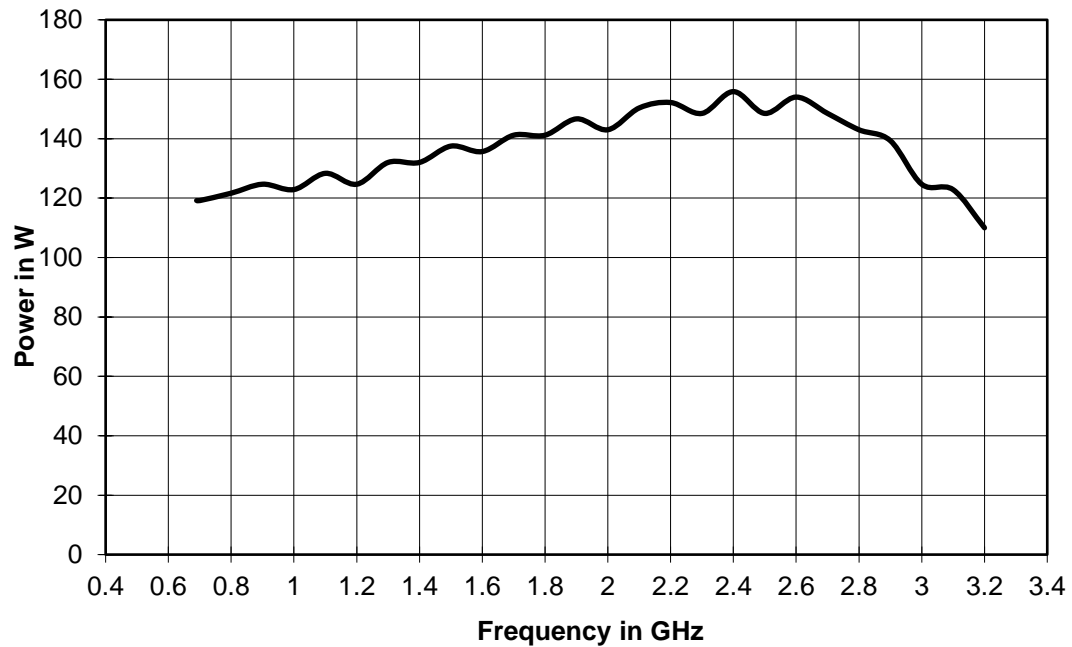

RF specifications

Main parameters		
Frequency range		0.69 GHz to 3.2 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		110 W (50.4 dBm)
Output power		min. 120 W (50.8 dBm)
Power output at 1 dB compression		min. 110 W (50.4 dBm)
Nominal power gain	at 3000 MHz	nom. 53.8 dB
Gain flatness		$\pm 2,7$ dB
Gain adjustment range		> 15 dB
Harmonics	at 110 W, < 1.8 GHz	< -17 dBc
	at 110 W, ≥ 1.8 GHz	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 55.5 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max -70 dBc
Noise figure	at maximum gain	nom. < 12.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 46 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 17 kg (37 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	10.5 A
	at 230 V	5.0 A
Rated power	RF _{cw} = 110 W (RMS), VSWR = 1	1.15 kVA

Power class 200 W

Frequency response at 1 dB compression

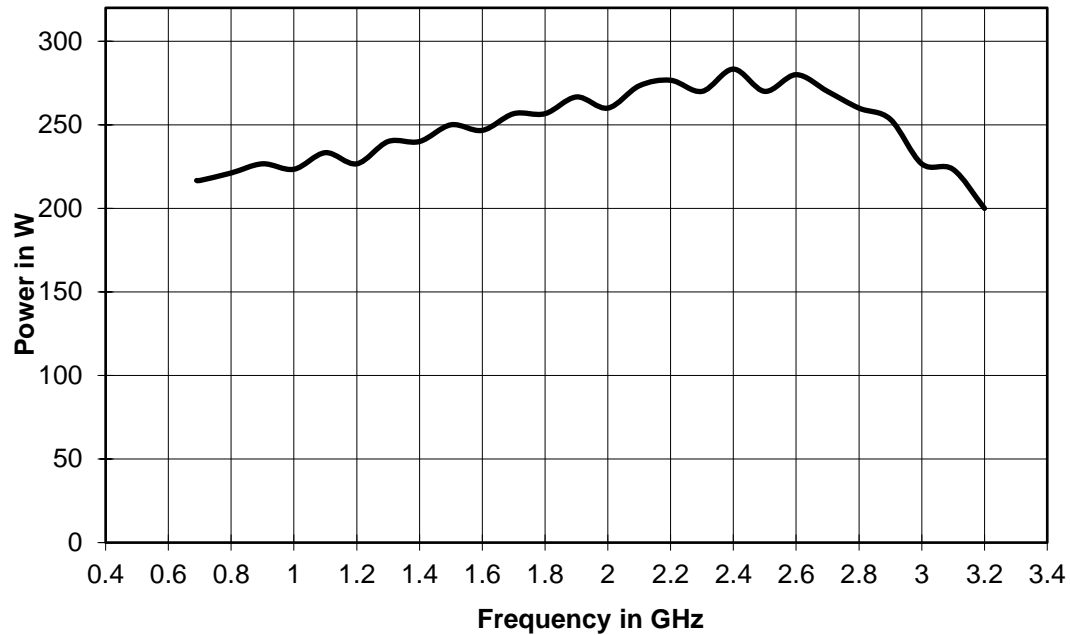

RF specifications

Main parameters		
Frequency range		0.69 GHz to 3.2 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		200 W (53 dBm)
Output power		min. 220 W (53.4 dBm)
Power output at 1 dB compression		min. 200 W (53 dBm)
Nominal power gain	at 3000 MHz	nom. 56.4 dB
Gain flatness		± 2.7 dB
Gain adjustment range		> 15 dB
Harmonics	at 200 W, < 1.8 GHz	< -16 dBc
	at 200 W, \geq 1.8 GHz	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 59 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max -70 dBc
Noise figure	at maximum gain	nom. < 12.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 46 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight	base unit	approx. 24 kg (53 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		120 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
	at 230 V	8.7 A
Rated power	RF _{cw} = 200 W (RMS), VSWR = 1	2.0 kVA

Power class 400 W

Frequency response at 1 dB compression

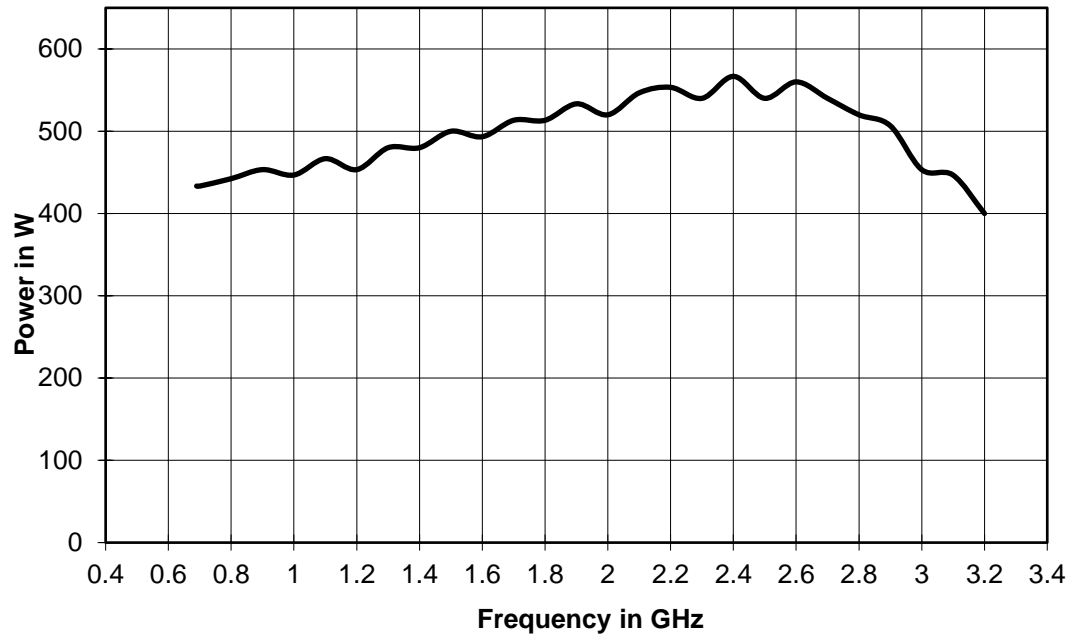

RF specifications

Main parameters		
Frequency range		0.69 GHz to 3.2 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		400 W (56 dBm)
Output power		min. 420 W (56.2 dBm)
Power output at 1 dB compression		min. 400 W (56 dBm)
Nominal power gain	at 3000 MHz	nom. 59.4 dB
Gain flatness		± 2.7 dB
Gain adjustment range		> 15 dB
Harmonics	at 400 W, < 1.8 GHz	< -17 dBc
	at 400 W, ≥ 1.8 GHz	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 62 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max -70 dBc
Noise figure	at maximum gain	nom. < 12.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 54 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	rack setup	19" rack, 12 HU, depth 800 mm (31.5 in)
Weight		approx. 95 kg (209 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	$7/_{16}$ DIN female
	or rear panel	$7/_{16}$ DIN female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		200 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
	optional	380 to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V per phase	7.8 A/7.8 A/0.1 A
Rated power	RF _{cw} = 400 W (RMS), VSWR = 1	3.6 kVA

Power class 800 W

Frequency response at 1 dB compression

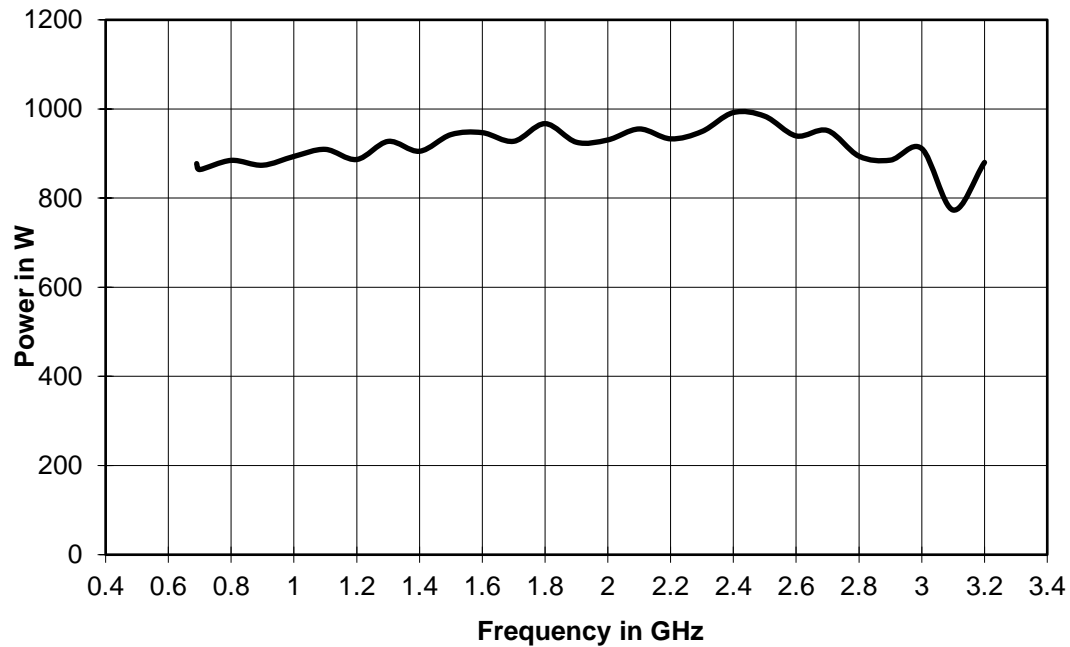

RF specifications

Main parameters		
Frequency range		0.69 GHz to 3.2 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		800 W (59.0 dBm)
Output power		min. 830 W (59.2 dBm)
Power output at 1 dB compression	0.69 GHz to 3.0 GHz	min. 830 W (59.2 dBm)
	3.0 GHz to 3.2 GHz	min. 700 W (58.5 dBm)
Nominal power gain	at 3000 MHz	nom. 62.4 dB
Gain flatness		± 3.8 dB
Gain adjustment range		> 15 dB
Harmonics	at 800 W, < 1.8 GHz	< -17 dBc
	at 800 W, \geq 1.8 GHz	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	
	0.69 GHz to 2 GHz	nom. 65 dBm
	2 GHz to 3.2 GHz	nom. 62 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure	at maximum gain	nom. < 17.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 59 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	rack setup	19" rack, 20 HU, depth 800 mm (31.5 in)
Weight		approx. 230 kg (507 lb)

RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	rear panel	1 $\frac{5}{8}$ " EIA female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female


Electrical specifications

AC supply voltage		
Nominal operating voltage range		380 to 415 V AC \pm 10 %, three phase with N, 50 Hz to 60 Hz \pm 6 %
	optional	200 V to 240 V AC \pm 10 %, three phase 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V per phase	15.6 A/7.8 A/7.8 A
Rated power	RF _{cw} = 800 W (RMS), VSWR = 1	7.2 kVA

Frequency band from 2.5 GHz to 6.0 GHz

Power class 15 W

Frequency response at 1 dB compression

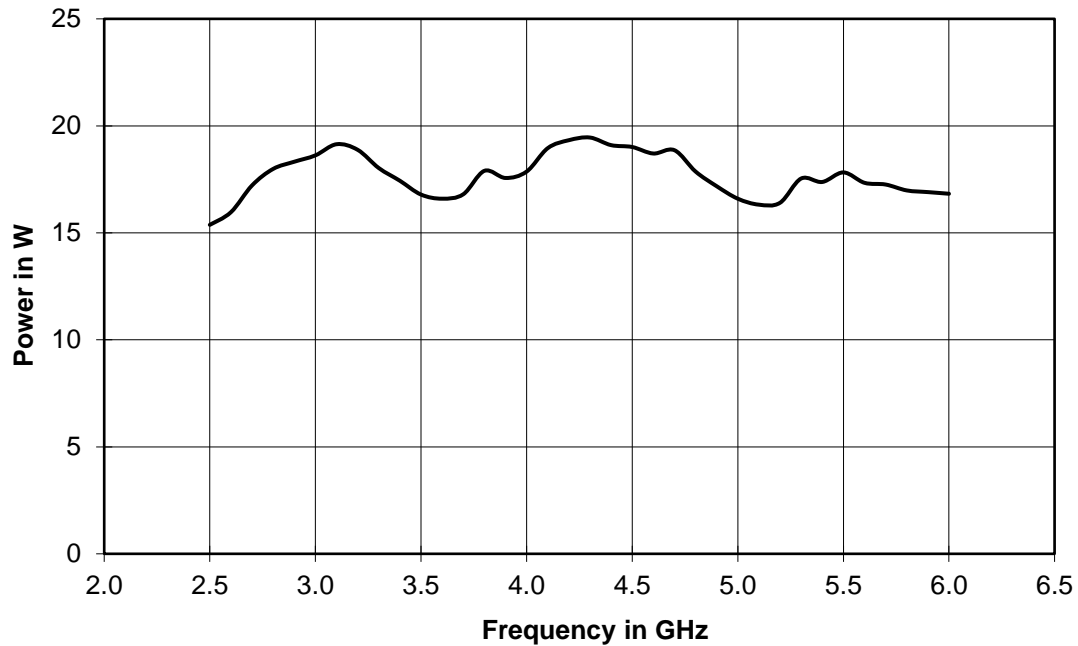

RF specifications

Main parameters		
Frequency range		2.5 GHz to 6.0 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		15 W (41.8 dBm)
Output power		min. 18 W (42.6 dBm)
Output power at 1 dB compression		min. 15 W (41.8 dBm)
Nominal power gain	at 3000 MHz	nom. 45.2 dB
Gain flatness		± 2.0 dB
Gain adjustment range		> 15 dB
Harmonics	at 15 W	< -23 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	nom. 48.0 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 11.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2.5:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 51 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 11 kg (24 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	4.5 A
	at 230 V	2.2 A
Rated power	RF _{cw} = 15 W (RMS), VSWR = 1	500 VA

Power class 30 W

Frequency response at 1 dB compression

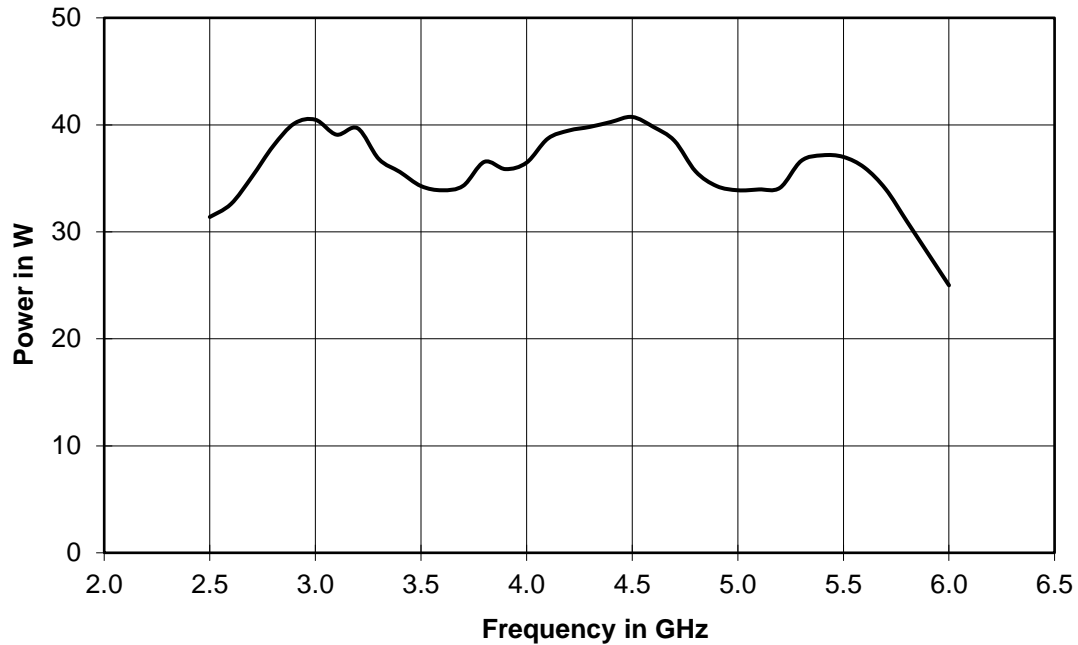

RF specifications

Main parameters		
Frequency range		2.5 GHz to 6.0 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		30 W (44.8 dBm)
Output power	< 5.5 GHz	min. 35 W (45.4 dBm)
	\geq 5.5 GHz	min. 30 W (44.8 dBm)
Output power at 1 dB compression	< 5.5 GHz	min. 30 W (44.8 dBm)
	\geq 5.5 GHz	min. 25 W (44.0 dBm)
Nominal power gain	at 3000 MHz	nom. 48.2 dB
Gain flatness		± 2.0 dB
Gain adjustment range		> 15 dB
Harmonics	at 30 W	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	
	< 5.5 GHz	nom. 50.5 dBm
	\geq 5.5 GHz	nom. 49.0 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 11.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2.5:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 51 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 11 kg (24 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	4.5 A
	at 230 V	2.2 A
Rated power	RF _{cw} = 30 W (RMS), VSWR = 1	500 VA

Power class 60 W

Frequency response at 1 dB compression

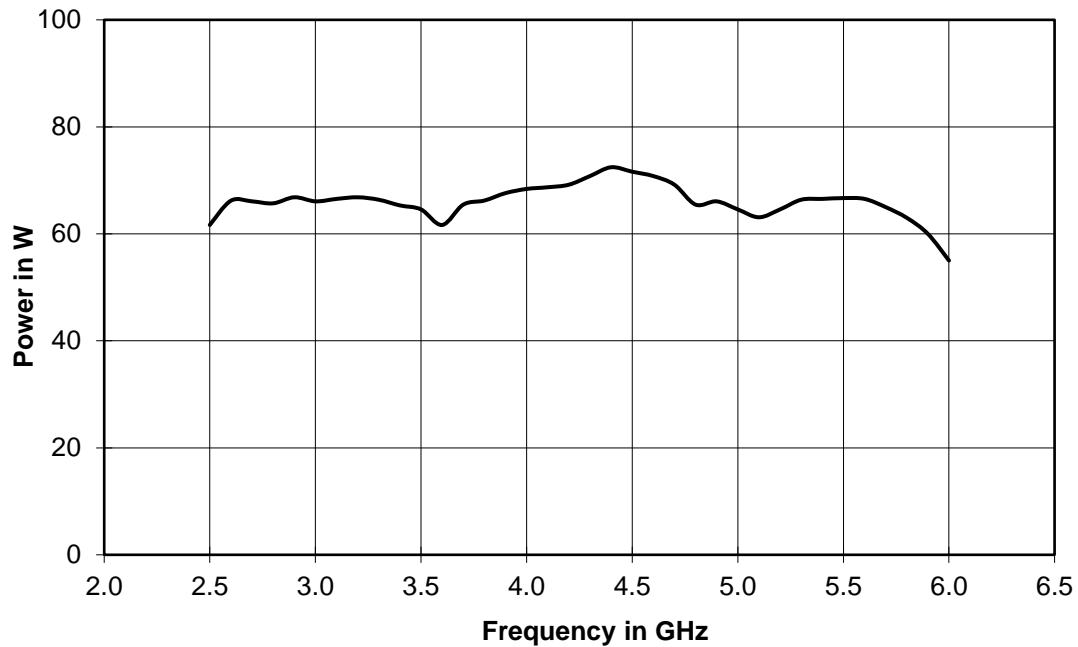

RF specifications

Main parameters		
Frequency range		2.5 GHz to 6.0 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		60 W (47.8 dBm)
Output power	< 4.5 GHz	min. 65 W (48.1 dBm)
	\geq 4.5 GHz	min. 60 W (47.8 dBm)
Output power at 1 dB compression	< 3.2 GHz	min. 60 W (47.8 dBm)
	\geq 3.2 GHz	min. 55 W (47.4 dBm)
Nominal power gain	at 3000 MHz	nom. 51.2 dB
Gain flatness		± 3.0 dB
Gain adjustment range		> 15 dB
Harmonics	at 60 W	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	
	< 5.5 GHz	nom. 53.0 dBm
	\geq 5.5 GHz	nom. 51.5 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 11.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2.5:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 51 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 15 kg (33 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	6.9 A
	at 230 V	3.3 A
Rated power	RF _{cw} = 60 W (RMS), VSWR = 1	760 VA

Power class 100 W

Frequency response at 1 dB compression

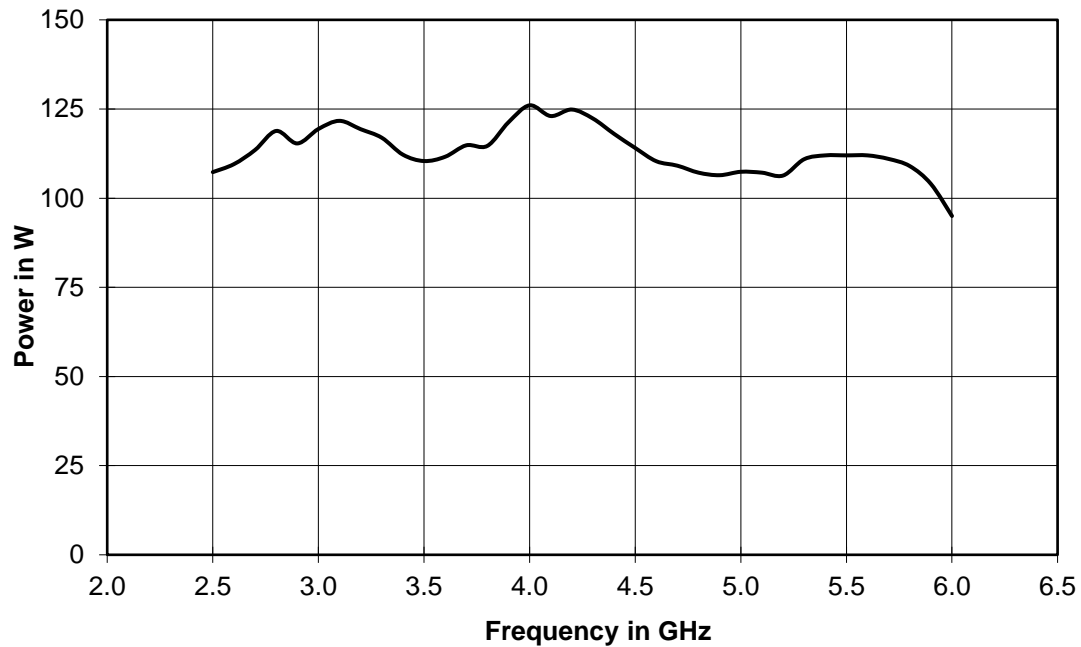

RF specifications

Main parameters		
Frequency range		2.5 GHz to 6.0 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		100 W (50.0 dBm)
Output power	< 4.5 GHz	min. 110 W (50.4 dBm)
	\geq 4.5 GHz	min. 100 W (50.0 dBm)
Output power at 1 dB compression	< 4.5 GHz	min. 100 W (50.0 dBm)
	> 4.5 GHz	min. 90 W (49.6 dBm)
Nominal power gain	at 3000 MHz	nom. 53.4 dB
Gain flatness		± 3.0 dB
Gain adjustment range		> 15 dB
Harmonics	at 100 W	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	
	< 5.5 GHz	nom. 55.0 dBm
	\geq 5.5 GHz	nom. 53.5 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 11.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2.5:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 51 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₄ , 4 HU
Weight		approx. 17 kg (37 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		100 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 110 V	10.0 A
	at 230 V	4.8 A
Rated power	RF _{cw} = 100 W (RMS), VSWR = 1	1.1 kVA

Power class 200 W

Frequency response at 1 dB compression

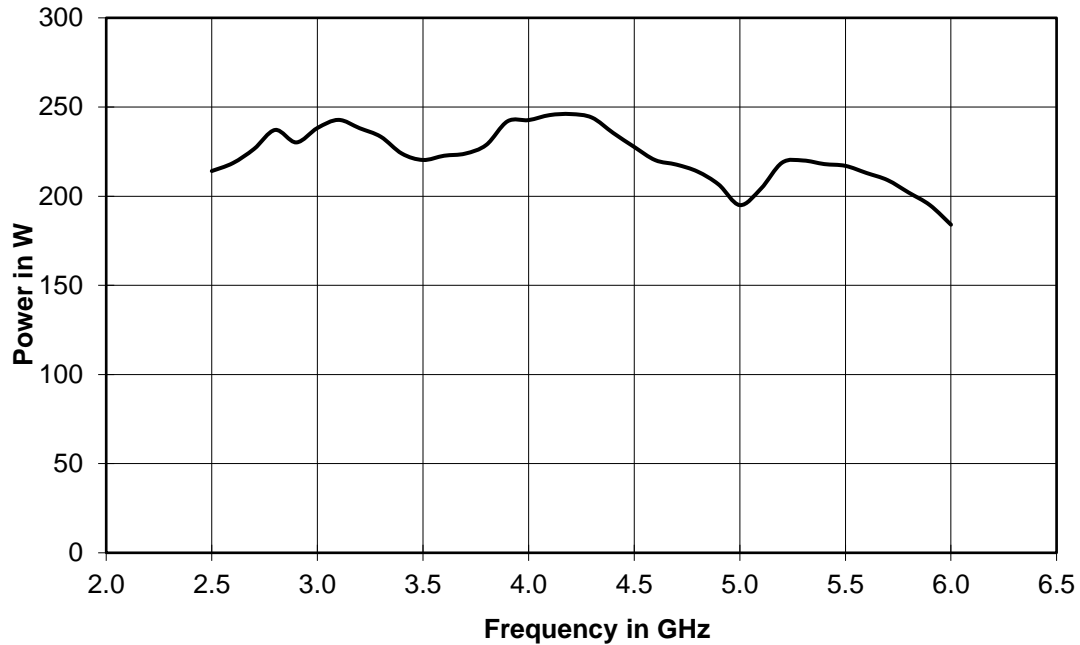

RF specifications

Main parameters		
Frequency range		2.5 GHz to 6.0 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		200 W (53.0 dBm)
Output power	< 4.5 GHz	min. 200 W (53.0 dBm)
	\geq 4.5 GHz	min. 190 W (52.8 dBm)
Output power at 1 dB compression	< 4.5 GHz	min. 200 W (53.0 dBm)
	\geq 4.5 GHz	min. 180 W (52.6 dBm)
Nominal power gain	at 3000 MHz	nom. 56.4 dB
Gain flatness		± 3.0 dB
Gain adjustment range		> 15 dB
Harmonics	at 200 W	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	
	< 4.5 GHz	nom. 58.0 dBm
	\geq 4.5 GHz	nom. 56.0 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 11.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2.5:1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 51 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	W x H x D, incl. fans, handles and stand	430 mm x 196 mm x 580 mm (16.93 in x 7.72 in x 22.83 in)
	for rackmounting	19" ¹ / ₁ , 4 HU
Weight		approx. 24 kg (53 lb)


RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	N female
	or rear panel	N female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		120 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
	at 230 V	9.1 A
Rated power	RF _{cw} = 200 W (RMS), VSWR = 1	2.1 kVA

Power class 400 W

Frequency response at 1 dB compression

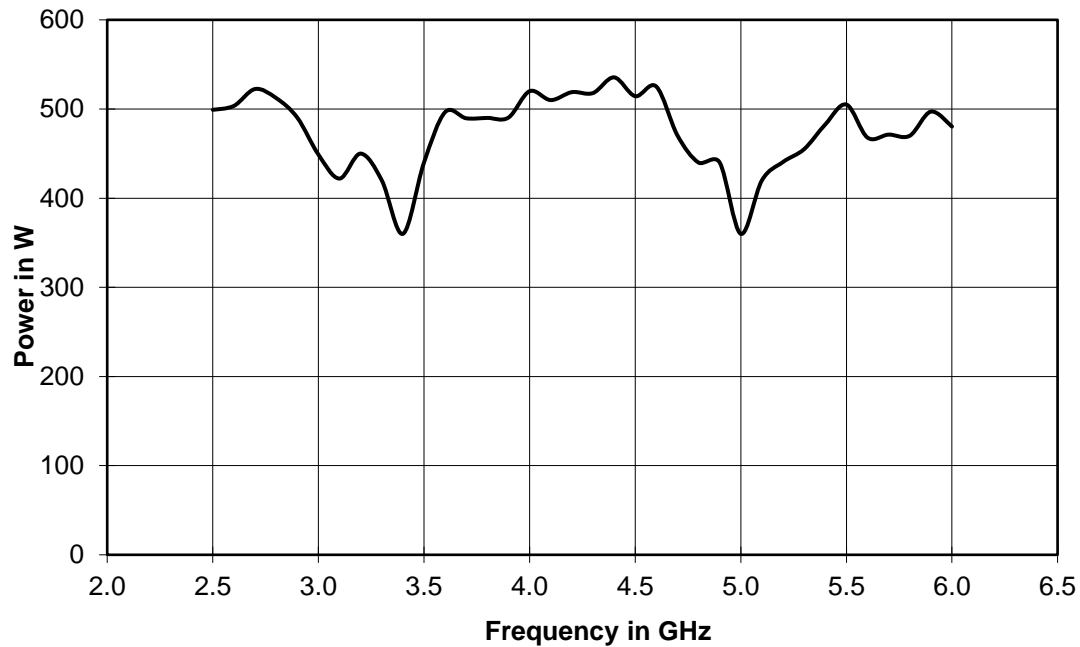

RF specifications

Main parameters		
Frequency range		2.5 GHz to 6.0 GHz instantaneously
Nominal output load		50 Ω
Nominal output power		400 W (56.0 dBm)
Output power	< 4.5 GHz	min. 400 W (56.0 dBm)
	\geq 4.5 GHz	min. 380 W (55.8 dBm)
Output power at 1 dB compression	< 3 GHz	min. 400 W (56.0 dBm)
	\geq 3 GHz	min. 360 W (55.6 dBm)
Nominal power gain	at 3000 MHz	nom. 59.4 dB
Gain flatness		\pm 4 dB
Gain adjustment range		> 15 dB
Harmonics	at 400 W	< -20 dBc
Third-order intercept point (TOI)	test frequencies 1 MHz apart	
	< 4.4 GHz	nom. 60.0 dBm
	\geq 4.4 GHz	nom. 57.0 dBm
Spurious	carrier offset > 100 kHz	nom. -80 dBc, max. -70 dBc
Noise figure at maximum gain		nom. < 11.0 dB

Input		
Nominal input impedance		50 Ω
Input level for nominal output power		-3.4 dBm
Input VSWR	at 50 Ω	max. 2.5 :1
Maximum input level	RF	+15 dBm
	DC	0 V

Output		
Nominal output impedance		50 Ω
Nominal forward output power	at VSWR < 6:1	continuous, without foldback
	at VSWR > 6:1	continuous, with gradual foldback to approx. 50 % of output power, depending on load impedance
Output mismatch protection, VSWR		100 %, without damage

RF sample and detected sample signals		
RF sample signal coupling factor	RF forward and reflected sample ports, optional	approx. 52 dB, see test report for details
Detected sample signal level	detected forward and reflected sample ports, optional	up to 3.0 V DC, see test report for details

Mechanical specifications

System size		
Dimensions	rack setup	19" rack, 12 HU, depth 800 mm (31.5 in)
Weight		approx. 97 kg (214 lb)

RF and sample connectors		
RF input port	either front panel	N female
	or rear panel	N female
RF output port	either front panel	7/16 DIN female
	or rear panel	7/16 DIN female
RF sample port	forward output power, optional	N female
	reflected output power, optional	N female
Detected sample port	forward output power, optional	N female
	reflected output power, optional	N female

Electrical specifications

AC supply voltage		
Nominal operating voltage range		200 V to 240 V AC \pm 10 %, single phase, 50 Hz to 60 Hz \pm 6 %
	optional	380 to 415 V AC \pm 10 %, three phase, with N, 50 Hz to 60 Hz \pm 6 % 200 V to 240 V AC \pm 10 %, three phase, 50 Hz to 60 Hz \pm 6 %
Rated current	at 230 V per phase	9.6 A/9.6 A/0.1 A
Rated power	RF _{cw} = 400 W (RMS), VSWR = 1	4.4 kVA

General data

Modulation specifications

Modulation capability	AM, FM, ϕ M or PM
-----------------------	------------------------

Cooling specifications

Air cooling	forced air, built-in fans, air entry at front, air exit at rear
-------------	---

Control specifications

Remote control		
Ethernet		RJ-45, 10/100 Mbit/s, auto-negotiation, half/full duplex

Local HMI		
Local display		200 x 48 pixel, monochrome
Manual controls	resting pushbutton	mains switch
	operation pushbuttons	<ul style="list-style-type: none"> • system standby/on • RF standby/operate • local/remote
	menu pushbuttons	<ul style="list-style-type: none"> • arrow up, down, left, right • ok • back
LED status information		<ul style="list-style-type: none"> • system standby/on • RF standby/operate • mute ready • interlock • error • local/remote

Web GUI		
Remote web GUI	via Ethernet	RJ-45, 10/100 Mbit/s, auto-negotiation, half/full duplex

Environmental specifications

Temperature loading	operating temperature range	0 °C to +40 °C
	storage temperature range	-20 °C to +70 °C
Damp heat		max. +40 °C at 95 % rel. humidity, without condensation
Altitude	operating altitude	up to 2000 m
	storage altitude	up to 4600 m
Mechanical resistance test values of desktop models	vibration, sinusoidal	5 Hz to 55 Hz, displacement 0.15 mm, > 55 Hz to 150 Hz, acceleration 0.5 g, in line with EN 60068-2-6
	vibration, random	effective acceleration \leq 1.2 g, 10 Hz to 300 Hz, acceleration density 0.003 g ² /Hz, in line with EN 60068-2-64
	shock	18 sawtooth shocks, each 40 g in 11 ms, in line with EN 60068-2-27, MIL-STD-810E method no. 516.4, procedure I
Calibration interval		no calibration needed
Electromagnetic compatibility	immunity	in line with EN 61326-1, public and industrial area
	electromagnetic fields	\leq 10 V/m, in line with IEC 61000-4-3
	surge test: line to ground	\leq 2 kV, in line with IEC 61000-4-5
	surge test: interlock to ground	\leq 2 kV, in line with IEC 61000-4-5
	surge test: Ethernet to ground	\leq 2 kV, in line with IEC 61000-4-5
	surge test: RF output to ground	\leq 2 kV, in line with IEC 61000-4-5
	surge test: line to line	\leq 1 kV, in line with IEC 61000-4-5
	bursts	\leq 2 kV, in line with IEC 61000-4-4

Electromagnetic emissions	overall	in line with EN 55011 (CISPR 11), industrial area, ISM group 1 or 2 and FCC 047 CFR part 18, non-consumer equipment
	conducted emissions	in line with EN 55011, class A
	radiated emissions from 30 MHz to 18 GHz	equipment for use in shielded areas only, normative limits of EN 55011 group 1/2 class A or FCC 047 CFR part 18 exceeded up to 40 dB: for up to R&S®BBA150-A400, R&S®BBA150-AB350, R&S®BBA150-D200 and R&S®BBA150-E100 up to 50 dB: for R&S®BBA150-A700, from R&S®BBA150-AB600, up to R&S®BBA150-BC250, from R&S®BBA150-D400 and R&S®BBA150-E200 up to 60 dB: from R&S®BBA150-AB1300 and R&S®BBA150-BC500
Electromagnetic field strength	all-around the enclosure	in line with the limits of rec 1999/519/EC, 26. BImSchV, BGV B11 exposure limit 2 (protection of health and safety of workers, consumers and the general public)
Electrical safety		in line with EN 61010-1:2010, IEC 61010-1:2011 + Corr. 2011 (3rd ed.), CAN/CSA-C22.2 no. 61010-1-12, UL 61010-1 3rd edition, May 11, 2012

Protection

RF		
Load VSWR		unlimited
Interlock		1 device interlock, 1 configurable interlock
Input protection against bias voltage	optional	DC block level \leq 50 V DC

Power supply		
Transient voltage compatibility		category II, in line with IEC 60364-4-443
Short-circuit breaking capacity		automatic all-pole 20 A circuit breaker

Miscellaneous		
Thermal overload		shutdown at thermal overload

General RF specifications

Amplifier type		class A amplifier
----------------	--	-------------------

The specified nominal output power is valid for all amplifiers in a 4 HU chassis with RF output at rear and for single band rack models at the RF connection panel.

For single and dual band amplifiers in a 4 HU chassis with RF output at front cable insertion loss reduces the output power:

Cable insertion loss for single-band and dual-band power amplifiers in 4 HU chassis with RF output at front	0 Hz to 1 GHz	\leq 0.20 dB
	1 GHz to 2 GHz	\leq 0.30 dB
	2 GHz to 3 GHz	\leq 0.40 dB
	3 GHz to 6 GHz	\leq 0.50 dB
	6 GHz to 8 GHz	\leq 0.60 dB

In case of rack integration, the loss due to cables and RF switches needs to be taken into account. The insertion loss of RF switches is specified under "Switching specifications" in this data sheet.

RF switching specifications – input and measurement

RF input switch, R&S®BBA-B110 option		
Switch type		1:2 or 2:1, mechanical
RF input port	at desktop model or rack connection panel switch	N female SMA female
Frequency range		0 Hz to 26.5 GHz
Switching time		< 10 ms
Life		10 000 000 cycles
Insertion loss	0 Hz to 3 GHz	≤ 0.20 dB, without cable loss
	3 GHz to 8 GHz	≤ 0.30 dB, without cable loss
	8 GHz to 12.4 GHz	≤ 0.40 dB, without cable loss
	12.4 GHz to 18 GHz	≤ 0.50 dB, without cable loss
	18 GHz to 26.5 GHz	≤ 0.70 dB, without cable loss
RF input switch, R&S®BBA-B116 option		
Switch type		1:6, mechanical
RF input port	at rack connection panel switch	N female SMA female
Frequency range		0 Hz to 18 GHz
Switching time		< 15 ms
Life		5 000 000 cycles
Insertion loss	0 Hz to 3 GHz	≤ 0.20 dB, without cable loss
	3 GHz to 8 GHz	≤ 0.30 dB, without cable loss
	8 GHz to 12.4 GHz	≤ 0.40 dB, without cable loss
	12.4 GHz to 18 GHz	≤ 0.50 dB, without cable loss

RF sample port switch, dual port, R&S®BBA-B142 option		
Switch type		2 × 2:1, mechanical
RF or detected sample ports	at desktop model or rack connection panel switches	N female SMA female
Frequency range		0 Hz to 26.5 GHz
Switching time		< 10 ms
Life		10 000 000 cycles
RF sample signal level		max. 10 dBm
Insertion loss	0 Hz to 3 GHz	≤ 0.20 dB, without cable loss
	3 GHz to 8 GHz	≤ 0.30 dB, without cable loss
	8 GHz to 12.4 GHz	≤ 0.40 dB, without cable loss
	12.4 GHz to 18 GHz	≤ 0.50 dB, without cable loss
	18 GHz to 26.5 GHz	≤ 0.70 dB, without cable loss

RF sample port switch, dual port, R&S®BBA-B146 option		
Switch type		2 × 6:1, mechanical
RF or detected sample ports	at rack connection panel switches	N female SMA female
Frequency range		0 Hz to 18 GHz
Switching time		< 10 ms
Life		5 000 000 cycles
RF sample signal level		max. 10 dBm
Insertion loss	0 Hz to 3 GHz	≤ 0.20 dB, without cable loss
	3 GHz to 8 GHz	≤ 0.30 dB, without cable loss
	8 GHz to 12.4 GHz	≤ 0.40 dB, without cable loss
	12.4 GHz to 18 GHz	≤ 0.50 dB, without cable loss

RF switching specifications – output

RF output switch, R&S®BBA-B120 option		
Switch type		2:1 or 1:2, mechanical
RF output port		N female
Frequency range		0 Hz to 12.4 GHz
Switching time		< 15 ms
Life		1 000 000 cycles
Average forward RF power	0 Hz to 1 GHz	max. 700 W • $1/\sqrt{\text{VSWR}}$
	1 GHz to 2 GHz	max. 500 W • $1/\sqrt{\text{VSWR}}$
	2 GHz to 3 GHz	max. 400 W • $1/\sqrt{\text{VSWR}}$
	3 GHz to 8 GHz	max. 250 W • $1/\sqrt{\text{VSWR}}$
	8 GHz to 12.4 GHz	max. 200 W • $1/\sqrt{\text{VSWR}}$
Insertion loss	0 Hz to 1 GHz	≤ 0.15 dB, without cable loss
	1 GHz to 2 GHz	≤ 0.20 dB, without cable loss
	2 GHz to 3 GHz	≤ 0.25 dB, without cable loss
	3 GHz to 8 GHz	≤ 0.35 dB, without cable loss
	8 GHz to 12.4 GHz	≤ 0.50 dB, without cable loss

RF output switch, R&S®BBA-B121 option		
Switch type		2:2, mechanical
RF output port		7/16 female
Frequency range		0 Hz to 6 GHz
Switching time		< 100 ms
Life		≥ 500 000
Average forward RF power	0 Hz to 1 GHz	max. 2.0 kW • $1/\sqrt{\text{VSWR}}$
	1 GHz to 2 GHz	max. 1.4 kW • $1/\sqrt{\text{VSWR}}$
	2 GHz to 3 GHz	max. 1.1 kW • $1/\sqrt{\text{VSWR}}$
	3 GHz to 4 GHz	max. 1.0 kW • $1/\sqrt{\text{VSWR}}$
	4 GHz to 5 GHz	max. 0.9 kW • $1/\sqrt{\text{VSWR}}$
	5 GHz to 6 GHz	max. 0.8 kW • $1/\sqrt{\text{VSWR}}$
Insertion loss	0 Hz to 2 GHz	≤ 0.05 dB, without cable loss
	2 GHz to 5 GHz	≤ 0.10 dB, without cable loss
	5 GHz to 6 GHz	≤ 0.15 dB, without cable loss

RF output switch, R&S®BBA-B122 option		
Switch type		2:2, mechanical
RF output port		$7/8$ " EIA
Frequency range		0 Hz to 3.5 GHz
Switching time		< 120 ms
Life		≥ 250 000
Average forward RF power	0 Hz to 0.1 GHz	max. 8 kW • $1/\sqrt{\text{VSWR}}$
	0.1 GHz to 0.23 GHz	max. 5 kW • $1/\sqrt{\text{VSWR}}$
	0.23 GHz to 0.86 GHz	max. 2.5 kW • $1/\sqrt{\text{VSWR}}$
	0.86 GHz to 2 GHz	max. 1.8 kW • $1/\sqrt{\text{VSWR}}$
	2 GHz to 3 GHz	max. 1.4 kW • $1/\sqrt{\text{VSWR}}$
	3 GHz to 3.5 GHz	max. 1.3 kW • $1/\sqrt{\text{VSWR}}$
Insertion loss	0 Hz to 1 GHz	≤ 0.03 dB, without cable loss
	1 GHz to 2 GHz	≤ 0.05 dB, without cable loss
	2 GHz to 3.5 GHz	≤ 0.20 dB, without cable loss

RF output switch, R&S®BBA-B123 option		
Switch type		2:2, mechanical
RF output port		1 5/8" EIA
Frequency range		0 Hz to 2 GHz
Switching time		< 120 ms
Life		≥ 250 000
Average forward RF power	0 Hz to 0.1 GHz	max. 19 kW • 1/√(VSWR)
	0.1 GHz to 0.23 GHz	max. 12.7 kW • 1/√(VSWR)
	0.23 GHz to 0.86 GHz	max. 6.6 kW • 1/√(VSWR)
	0.86 GHz to 1.6 GHz	max. 4.8 kW • 1/√(VSWR)
	1.6 GHz to 2 GHz	max. 4.3 kW • 1/√(VSWR)
Insertion loss	0 Hz to 0.86 GHz	≤ 0.05 dB, without cable loss
	0.86 GHz to 2 GHz	≤ 0.10 dB, without cable loss

RF output switch, R&S®BBA-B126 option		
Switch type		6:1, mechanical
RF output port		N female
Frequency range		0 Hz to 12.4 GHz
Switching time		< 15 ms
Life		≥ 2 000 000 cycles
Average forward RF power	0 Hz to 1 GHz	max. 700 W • 1/√(VSWR)
	1 GHz to 2 GHz	max. 500 W • 1/√(VSWR)
	2 GHz to 3 GHz	max. 400 W • 1/√(VSWR)
	3 GHz to 8 GHz	max. 250 W • 1/√(VSWR)
Insertion loss	0 Hz to 1 GHz	≤ 0.15 dB, without cable loss
	1 GHz to 2 GHz	≤ 0.20 dB, without cable loss
	2 GHz to 3 GHz	≤ 0.25 dB, without cable loss
	3 GHz to 8 GHz	≤ 0.35 dB, without cable loss
	8 GHz to 12.4 GHz	≤ 0.5 dB, without cable loss

Fast amplifier mute specifications

Fast amplifier mute, R&S®BBA-B130 option, for R&S®BBA150-Ax only above 3 MHz		
External mute signal		TTL
Mute on delay (amplifier switches to mute mode, RF turns off)		nom. < 8 μs
Mute off delay (amplifier leaves mute mode, RF turns on)	models with frequency band from 9 kHz to 250 MHz, from 4 kHz to 400 MHz	nom. < 2.5 ms
	models with frequency band from 0.69 GHz to 3.2 GHz, from 2.5 GHz to 6.0 GHz	nom. < 4 μs
	models with frequency band from 80 MHz to 1.0 GHz	nom. < 15 μs

Ordering information

R&S®BBA150 single-band power amplifiers

Frequency band from 9 kHz to 250 MHz

Designation	Type	Configuration No.
125 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A125
160 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A160
200 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A200
400 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A400
700 W, air-cooled, 12 HU rack model	R&S®BBA150	BBA150-A700
1300 W, air-cooled, 20 HU rack model	R&S®BBA150	BBA150-A1300
2500 W, air-cooled, 35 HU rack model	R&S®BBA150	BBA150-A2500

Frequency band from 4 kHz to 400 MHz

Designation	Type	Configuration No.
75 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-AB75
125 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-AB125
160 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-AB160
200 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-AB200
350 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-AB350
600 W, air-cooled, 12 HU rack model	R&S®BBA150	BBA150-AB600

Frequency band from 80 MHz to 1.0 GHz

Designation	Type	Configuration No.
70 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC70
125 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC125
160 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC160
250 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC250
500 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC500
1000 W, air-cooled, 12 HU rack model	R&S®BBA150	BBA150-BC1000
1250 W, air-cooled, 20 HU rack model	R&S®BBA150	BBA150-BC1250
1500 W, air-cooled, 20 HU rack model	R&S®BBA150	BBA150-BC1500
2000 W, air-cooled, 20 HU rack model	R&S®BBA150	BBA150-BC2000
3000 W, air-cooled, 35 HU rack model	R&S®BBA150	BBA150-BC3000

Frequency band from 0.69 GHz to 3.2 GHz

Designation	Type	Configuration No.
30 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D30
60 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D60
110 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D110
200 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D200
400 W, air-cooled, 12 HU rack model	R&S®BBA150	BBA150-D400
800 W, air-cooled, 20 HU rack model	R&S®BBA150	BBA150-D800

Frequency band from 2.5 GHz to 6.0 GHz

Designation	Type	Configuration No.
15 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-E15
30 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-E30
60 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-E60
100 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-E100
200 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-E200
400 W, air-cooled, 12 HU rack model	R&S®BBA150	BBA150-E400

Accessories supplied: power cord, user manual on CD.

R&S®BBA150 twin-band power amplifiers

Frequency bands 2 x from 9 kHz to 250 MHz

Designation	Type	Configuration No.
75 W/75 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A75A75
125 W/125 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A125A125
200 W/200 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A200A200

Frequency bands 2 x from 80 MHz to 1 GHz

Designation	Type	Configuration No.
160 W/160 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC160BC160
250 W/250 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC250BC250

Frequency bands 2 x from 0.69 GHz to 3.2 GHz

Designation	Type	Configuration No.
30 W/30 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D30D30
60 W/60 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D60D60
110 W/110 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D110D110

Frequency bands 2 x from 2.5 GHz to 6 GHz

Designation	Type	Configuration No.
30 W/30 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-E30E30
60 W/60 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-E60E60
100 W/100 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-E100E100

Accessories supplied: power cord, user manual on CD.

R&S®BBA150 dual-band power amplifiers

Frequency bands from 9 kHz to 250 MHz and 80 MHz to 1 GHz

Designation	Type	Configuration No.
125 W/70 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A125BC70
125 W/125 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A125BC125
125 W/250 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A125BC250
160 W/125 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A160BC125
160 W/160 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A160BC160
200 W/70 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A200BC70
200 W/125 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A200BC125
200 W/250 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A200BC250
400 W/125 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A400BC125
400 W/70 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-A400BC70

Frequency bands from 80 MHz to 1 GHz and 0.69 GHz to 3.2 GHz

Designation	Type	Configuration No.
125 W/30 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC125D30
125 W/60 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC125D60
125 W/110 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC125D110
250 W/30 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC250D30
250 W/60 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC250D60
250 W/110 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-BC250D110

Frequency bands from 0.69 GHz to 3.2 GHz and 2.5 GHz to 6.0 GHz

Designation	Type	Configuration No.
30 W/15 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D30E15
30 W/30 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D30E30
60 W/15 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D60E15
60 W/30 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D60E30
60 W/60 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D60E60
110 W/30 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D110E30
110 W/60 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D110E60
110 W/100 W, air-cooled, 4 HU desktop model	R&S®BBA150	BBA150-D110E100

Accessories supplied: power cord, user manual on CD.

Options

Designation	Type	Order No.
GPIB Remote Control	R&S®BBA-B101	5355.8250.02 ¹
POE-Switch	R&S®BBA-B102	5355.8243.30
Optical Ethernet Remote Control	R&S®BBA-B105	5355.8266.03
RF Input Switch (1:2 or 2:1, N)	R&S®BBA-B110	5355.8866.02 ¹
RF Input Switch (1:6, N)	R&S®BBA-B116	5355.8950.12
RF Output Switch (2:1 or 1:2, N)	R&S®BBA-B120	5355.8795.02 ¹
RF Output Switch (2:2, $\frac{7}{16}$ " EIA)	R&S®BBA-B121	5355.8895.12 ¹
RF Output Switch (2:2, $\frac{7}{8}$ " EIA)	R&S®BBA-B122	5355.8989.12
RF Output Switch (2:2, 1 $\frac{5}{8}$ " EIA)	R&S®BBA-B123	5355.8943.12
RF Output Switch (6:1, N)	R&S®BBA-B126	5355.8995.12
Fast Amplifier Mute, for R&S®BBA150-Ax above 3 MHz only	R&S®BBA-B130	5355.8114.02
DC Block Input Protection (N)	R&S®BBA-B132	5353.9236.03
RF Forward/RF Reflected Sample Ports (N front)	R&S®BBA-B140	5355.8837.02
RF Forward/RF Reflected Sample Ports (N rear)	R&S®BBA-B140	5355.8837.03
Detected Forward/Detected Reflected Sample Ports (N front)	R&S®BBA-B141	5355.8850.02
Detected Forward/Detected Reflected Sample Ports (N rear)	R&S®BBA-B141	5355.8850.03
Sample Port Switch (2 x 2 :1, N)	R&S®BBA-B142	5355.8872.02 ¹
Sample Port Switch (2 x 6:1, N)	R&S®BBA-B146	5355.8972.02
Transparent I/O	R&S®BBA-B160	5355.8889.02

Service

Designation	Type	Order No.
Upgrade Frequency Band/RF Output Power	R&S®BBA-UPGR	on request

Service options	Type	Order No.
Service Level Agreement BASIC 1, 2 or 3 years	R&S®SB1/2/3AMP	5354.6560.02/03/04
Service Level Agreement ADVANCED 1, 2 or 3 years depending on regional availability	R&S®SA1/2/3AMP	5354.6560.07/08/09
Service Level Agreement PREMIUM 1, 2 or 3 years depending on regional availability	R&S®SP1/2/3AMP	5354.6560.12/13/14
Regular product maintenance 1 - 6 years	R&S®SV1AMP	5354.6560.22-.28

Accessories

Designation	Type	Order No.
Rackmounting Brackets (pair)	R&S®ZR1-RA02	5355.8208.00
Mounting Rails, for R&S®BBA150 with transport lock (pair)	R&S®ZR1-SLR03	5355.8220.12
Mounting Rails, for R&S®BBA150 without transport lock (pair)	R&S®ZR1-SLR03	5355.8220.13
Mounting Rails, for other equipment (pair)	R&S®ZR1-SLR02	5353.9565.02
AC Power Cord (German plug), PE cable	R&S®ZR1-PSEA	5355.8514.02
AC Power Cord (without plug), PE cable	R&S®ZR1-PSEA	5355.8514.03
AC Power Cord (NEMA L5-15P US plug), PE cable	R&S®ZR1-PSEA	5355.8514.04
AC Power Cord (NEMA L5-30P US plug), PE cable	R&S®ZR1-PSEA	5355.8514.05
AC Power Cord (JIS C8303 Japanese plug), PE cable	R&S®ZR1-PSEA	5355.8514.06
AC Power Cord (PRC3/16 Chinese plug), PE cable	R&S®ZR1-PSEA	5355.8514.07
AC Power Cord (BS13/13 British plug)	R&S®ZR1-PSEA	5355.8514.08
AC Power Cord (ZA3 South African, Indian plug)	R&S®ZR1-PSEA	5355.8514.09
AC Power Cord (12G Swiss plug)	R&S®ZR1-PSEA	5355.8514.10
AC Power Cord (BR/3/20 Brazil plug)	R&S®ZR1-PSEA	5355.8514.11
Operating Manual, German, printed version	R&S®BBA-MA	5355.8120.03
Operating Manual, English, printed version	R&S®BBA-MA	5355.8120.02
Rack Wheels	R&S®ZR1-RW	5353.9707.03
Rubber Wheels for racks up to 20 HU	R&S®ZR1-RW	5353.9707.04

Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Rohde & Schwarz training

www.training.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- | North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- | China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 3606.7247.22 | Version 15.00 | January 2019 (GK)

R&S®BBA150 Broadband Amplifier

Data without tolerance limits is not binding | Subject to change

© 2013 - 2019 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



3606724722